

42*84 inch Hidden Barn Door Installation Manual

YCM11-42x84IN

Any question please contact us:
support@jubest.com

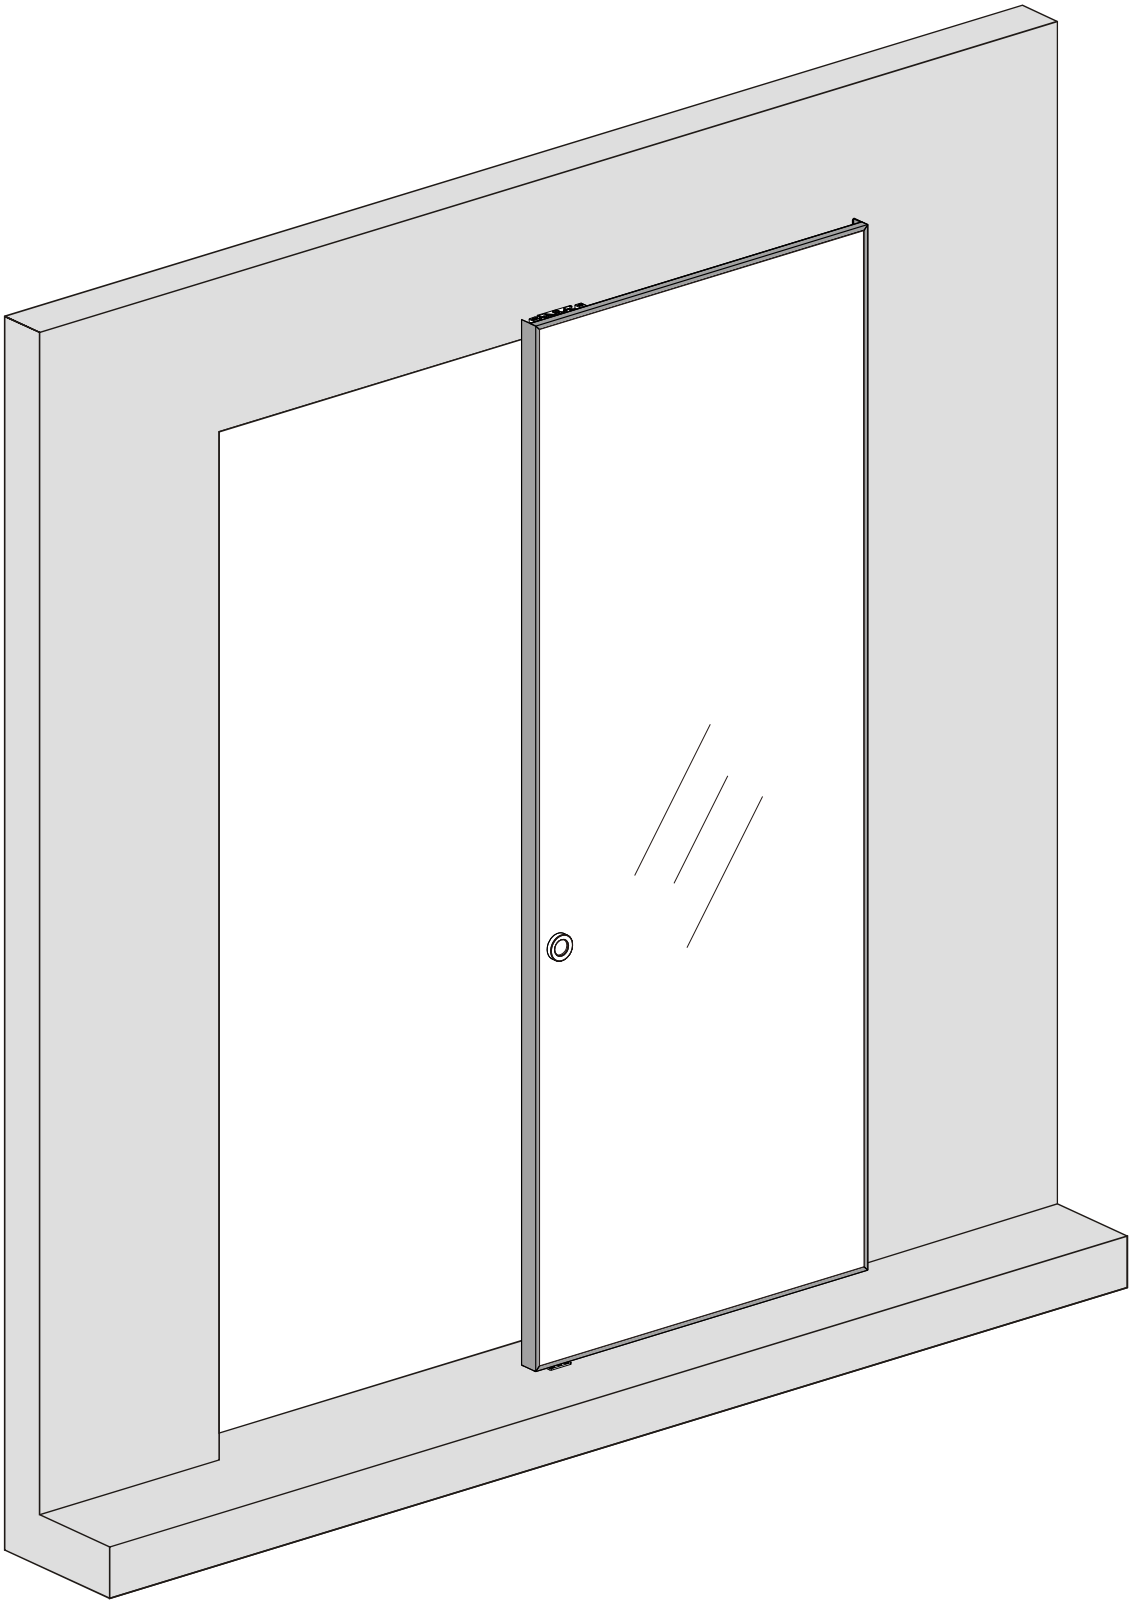


TOOLS REQUIRED

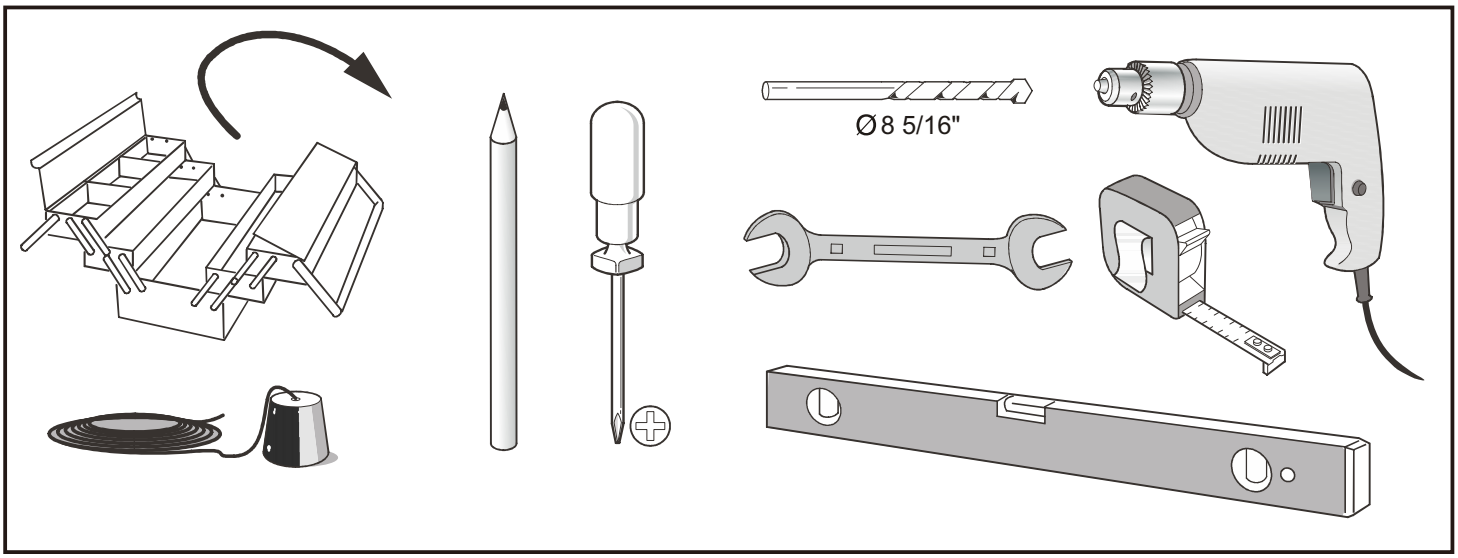

WHAT IS IN THE BOX


A Adjustable top roller



(x1)




(x4)
ST 11/64"x1 31/32"
(4.2mmx50mm)




(x4)
Ø5/16"
(8mm)

B Soft close kits




Left(x1)



Right(x1)

C Sliding track



(x1)



(x10)
ST 9/64"x33/64"
(3.5mmx13mm)

D Bottom roller




(x2)




(x4)
ST 11/64"x63/64"
(4.2mmx25mm)

E Bottom guide channel



(x1)

F Floor mounted guide



(x1)



(x2)
ST 3/16"x1 1/2"
(4.8mmx38mm)

(x2)
Ø5/16"
(8mm)

G Flush pull



(x1)




(x2)
M 15/64"x63/64"
(6mmx25mm)



(x1)

H Spacer



(x1)

I Door slab




42"x84"
(1070mmx2136mm)

(x1)




(x1)

Door opened position

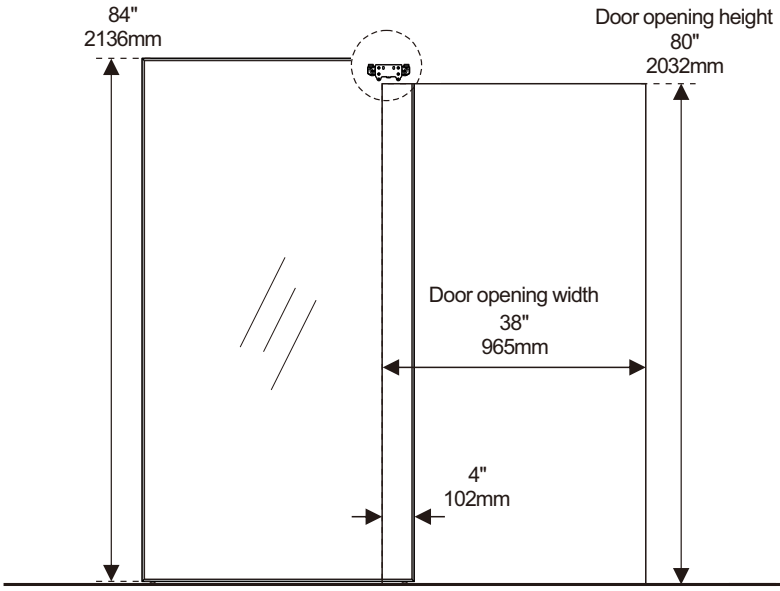


Door closed position

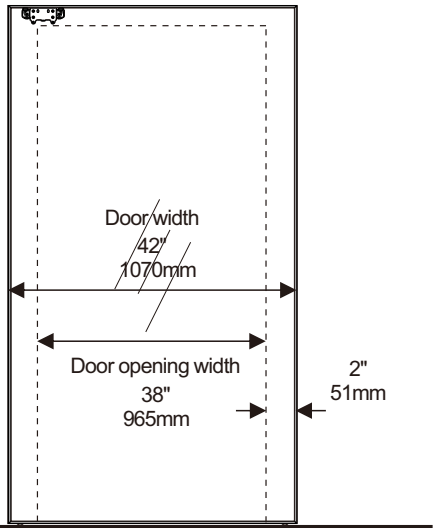


fits 38*80 or 40*80 inch door opening, please consult with us before installation if you have other sizes of door opening


Door opened position

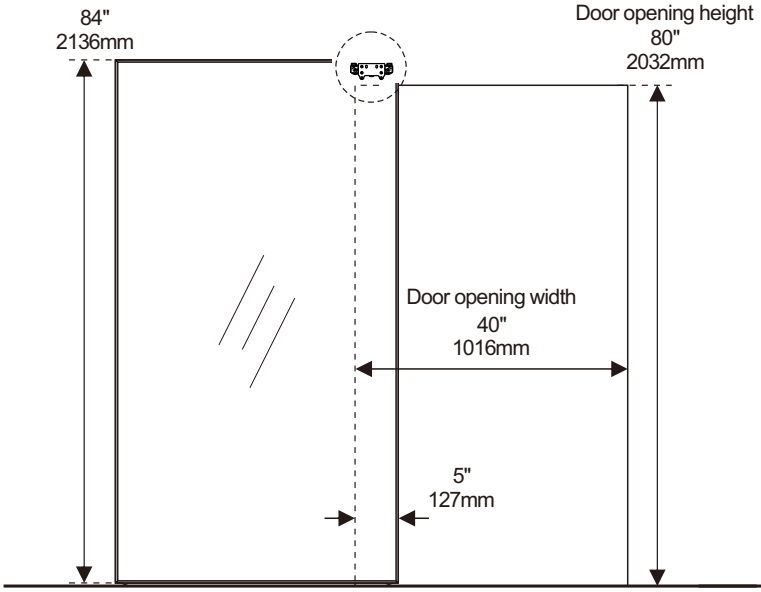

Door closed position

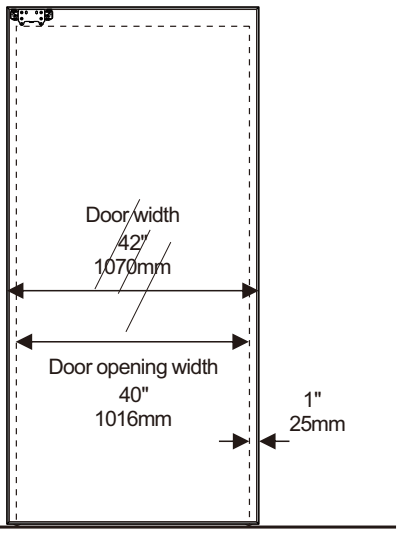


Section drawing

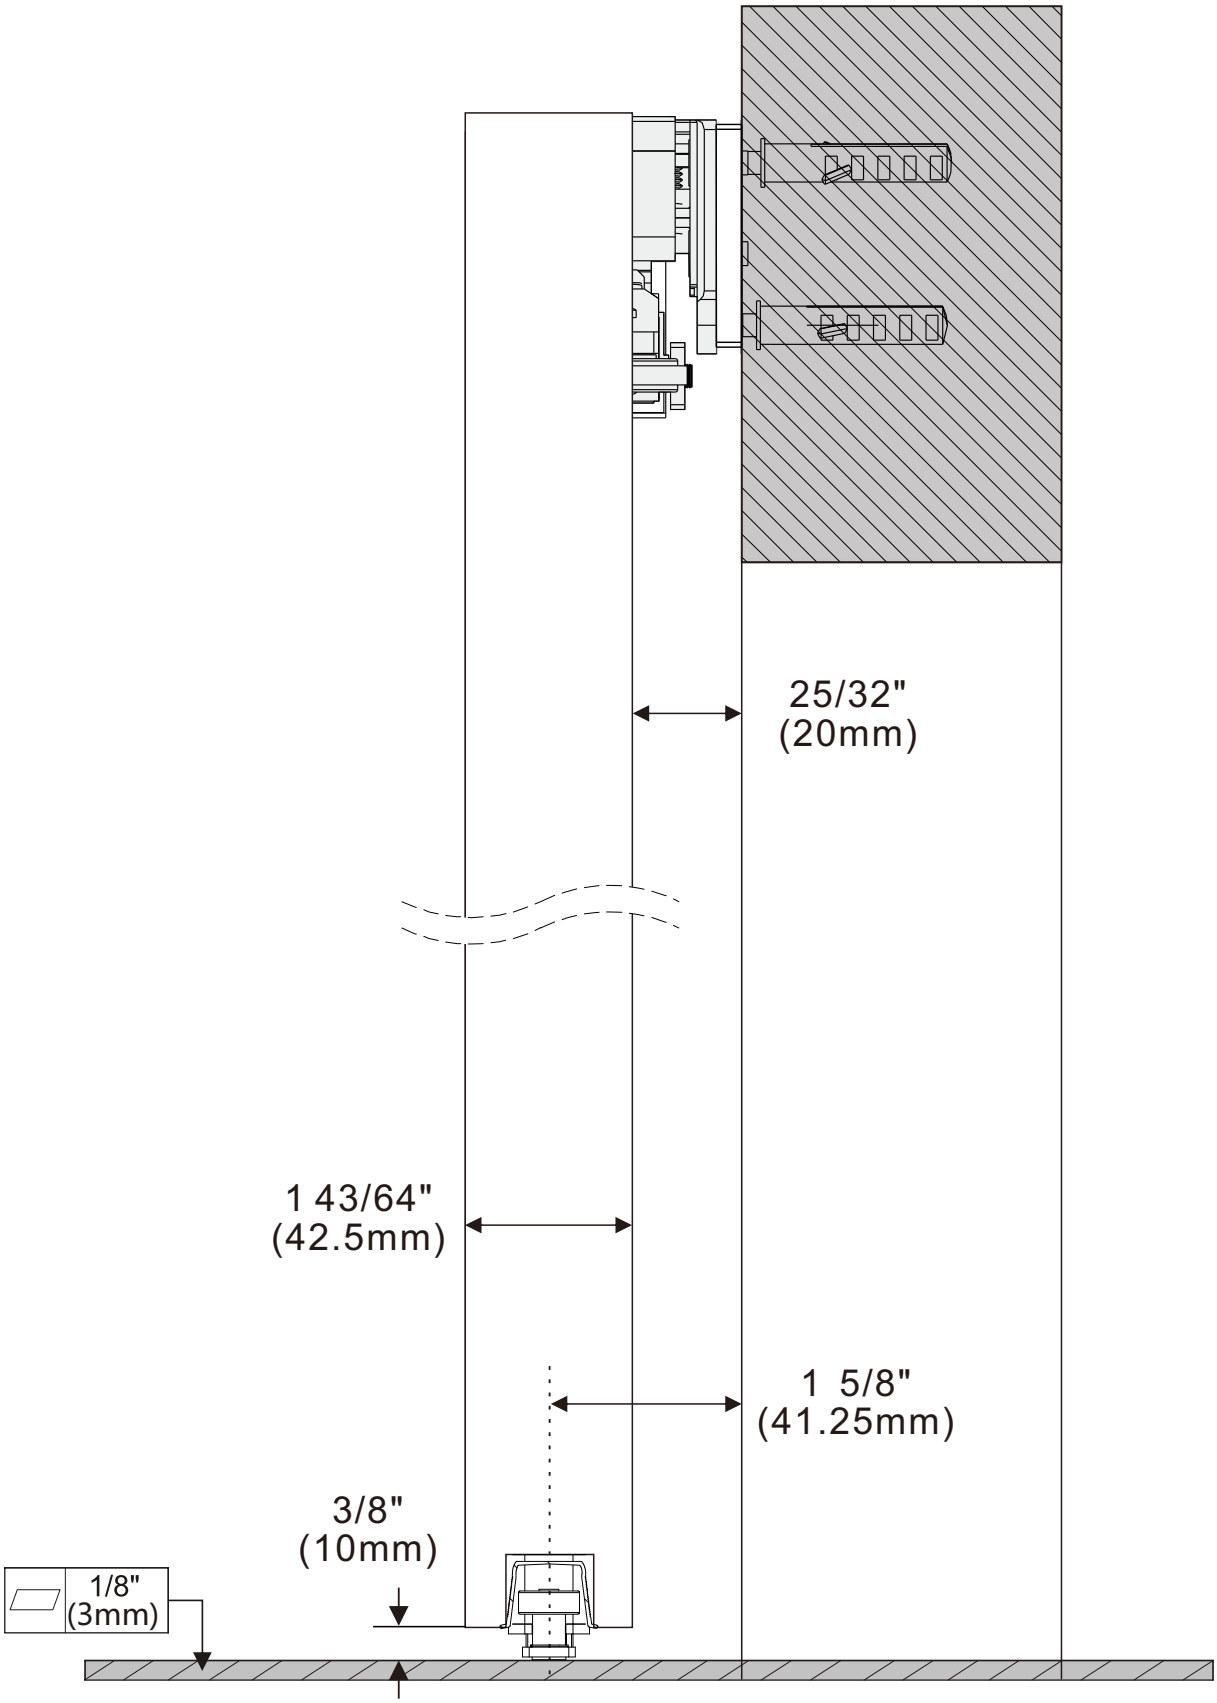


1 Mount soft close kits(B)


① Activate soft close devices by hand

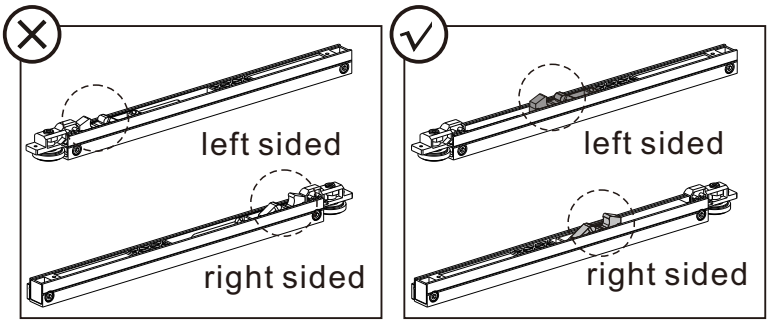


② Loosen screw on both ends of soft close device

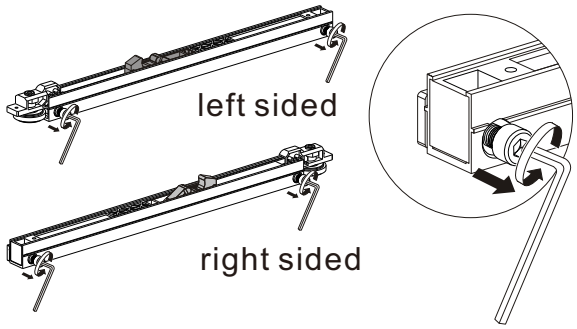


③ Slide both left sided and right sided soft close devices in the track(C)

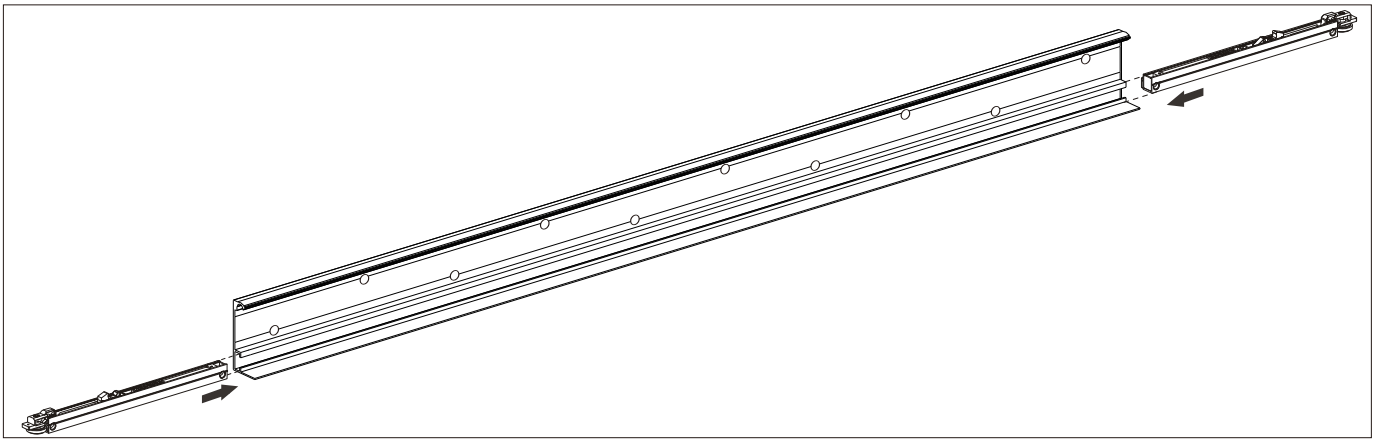

④ Ensure it is flush with the end of track(C) and fasten the screw

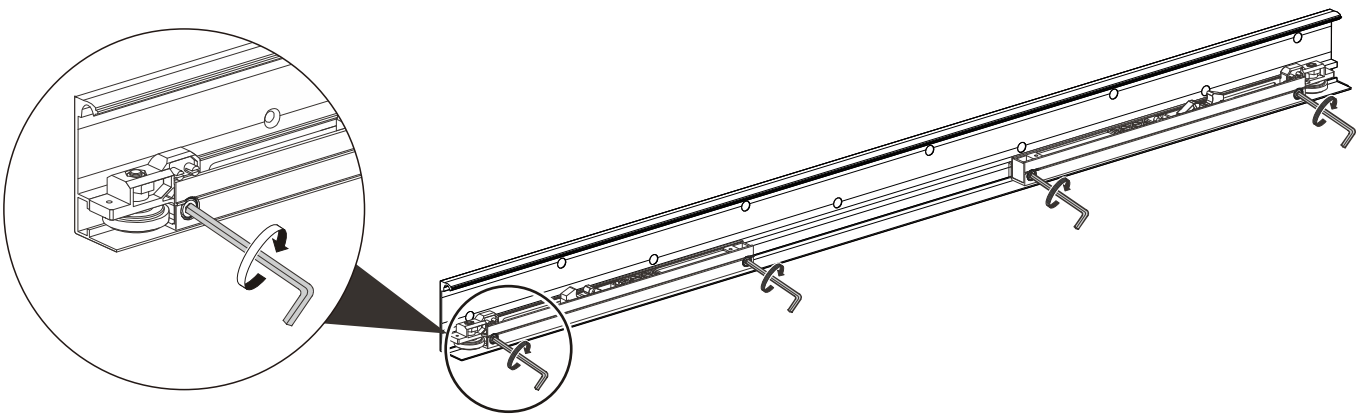


2 Mount aluminum track (C)on door (I)

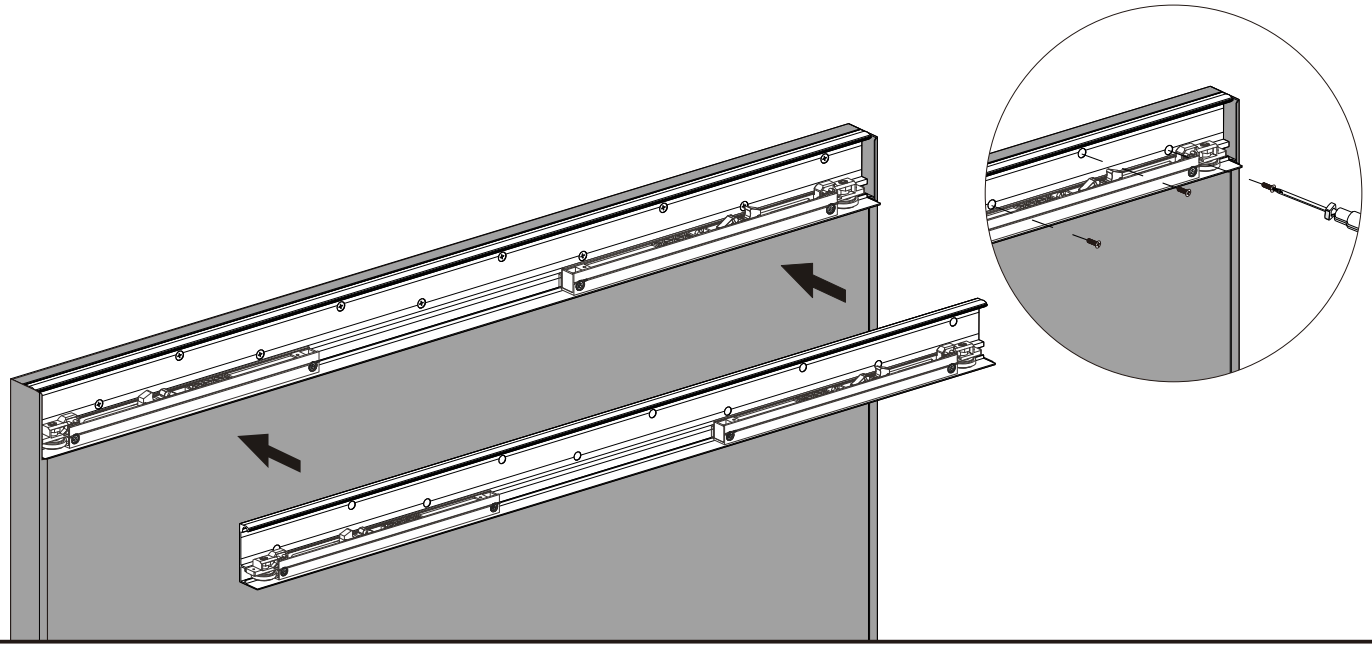


3 Install bottom roller(D) and guide channel(E) inside the slot of door slab(I)


① Remove the wheel from the case

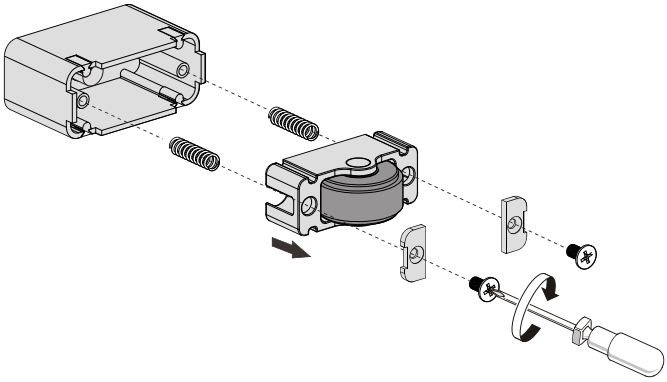


② Fasten bottom roller case inside the bottom of door slab

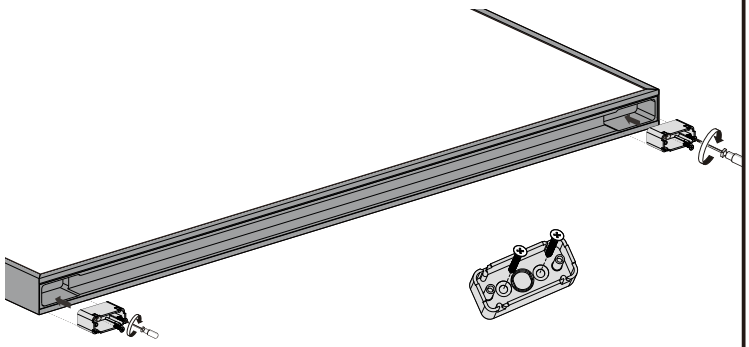

③ Fasten the wheel inside the case

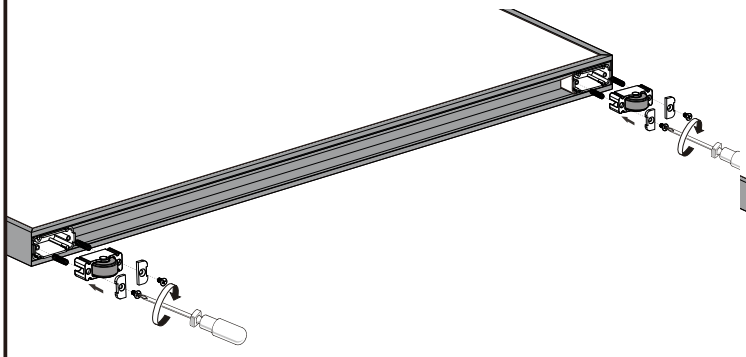


④ Press fit guide channel inside the slot

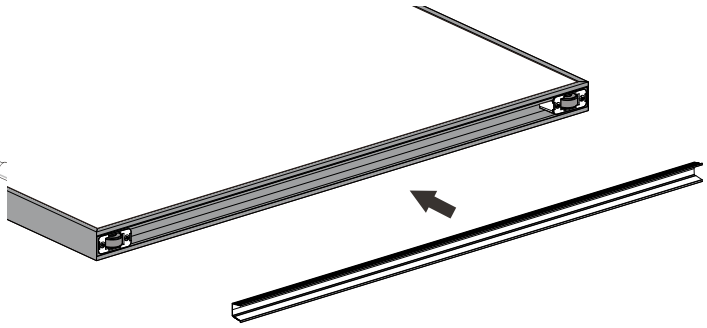


4 Mount adjustable top roller(A) and mount floor guide(F)
NOTE: top roller assembly must be installed into wall blocking.


Door opening size:38x80"


① Loose the screw and remove anti-jump block

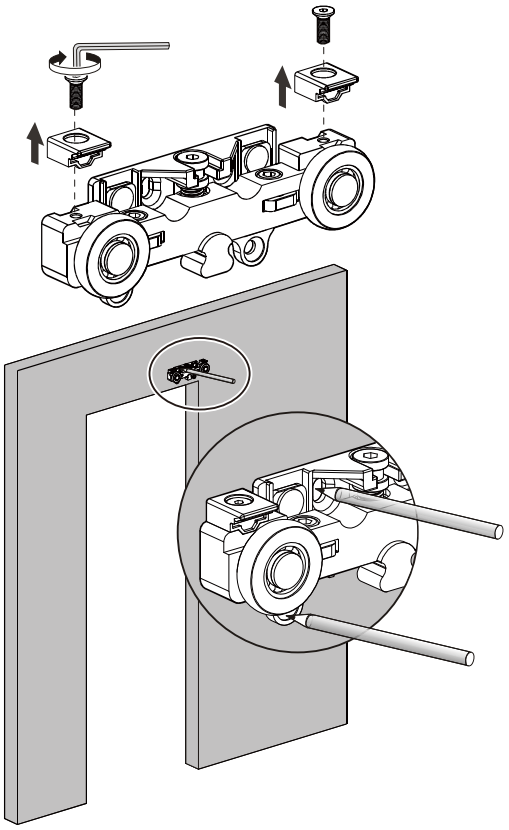

② Fasten the top roller onto wall through spacer(H)

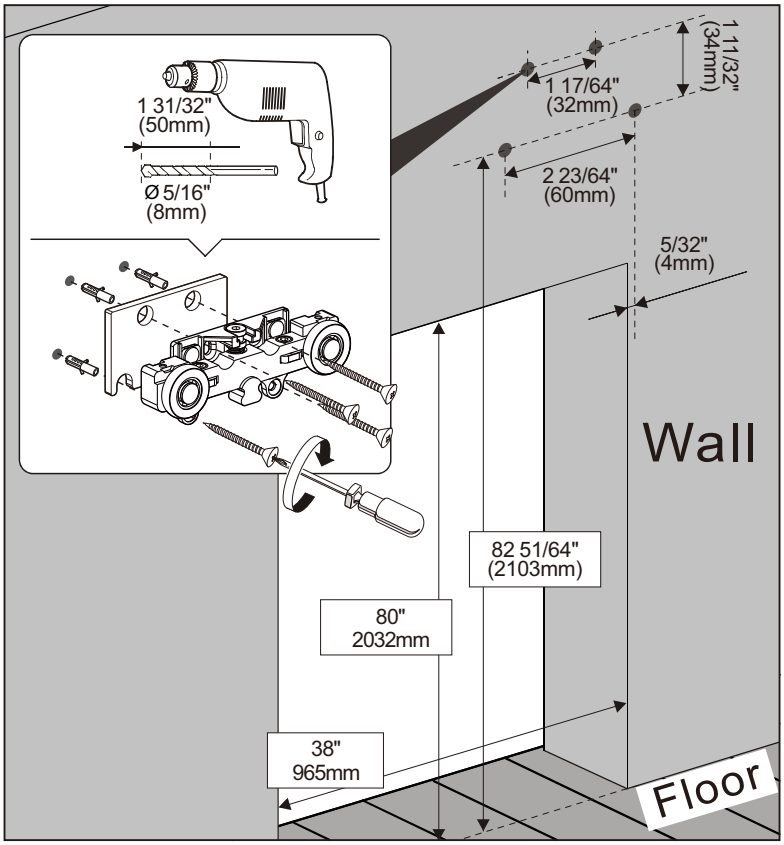

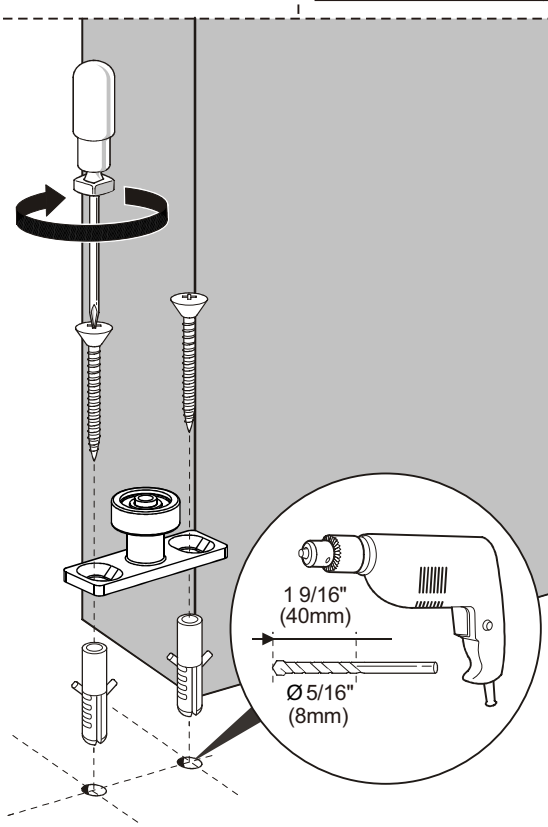


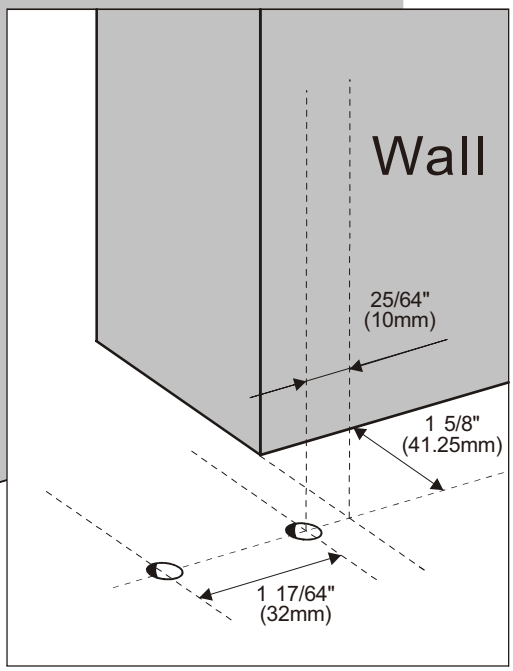


4 Mount adjustable top roller(A) and mount floor guide(F)
NOTE: top roller assembly must be installed into wall blocking.


Door opening size:40x80"

① Loose the screw and remove anti-jump block

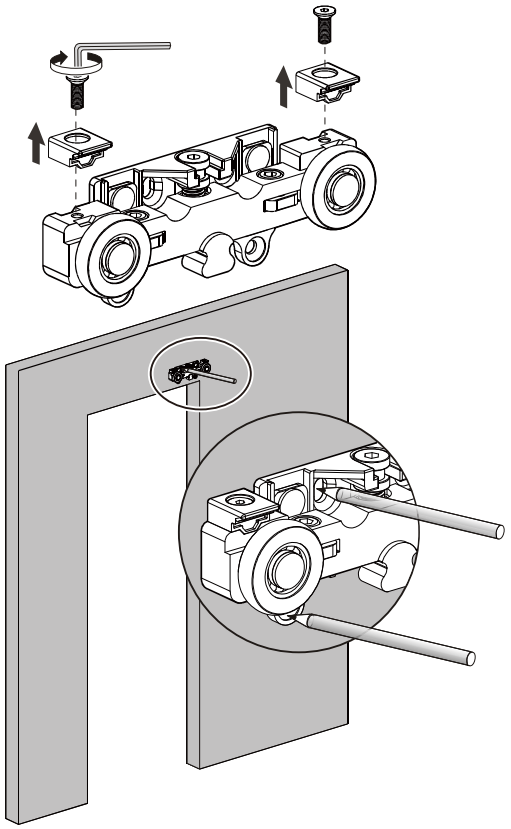


② Fasten the top roller onto wall through spacer(H)

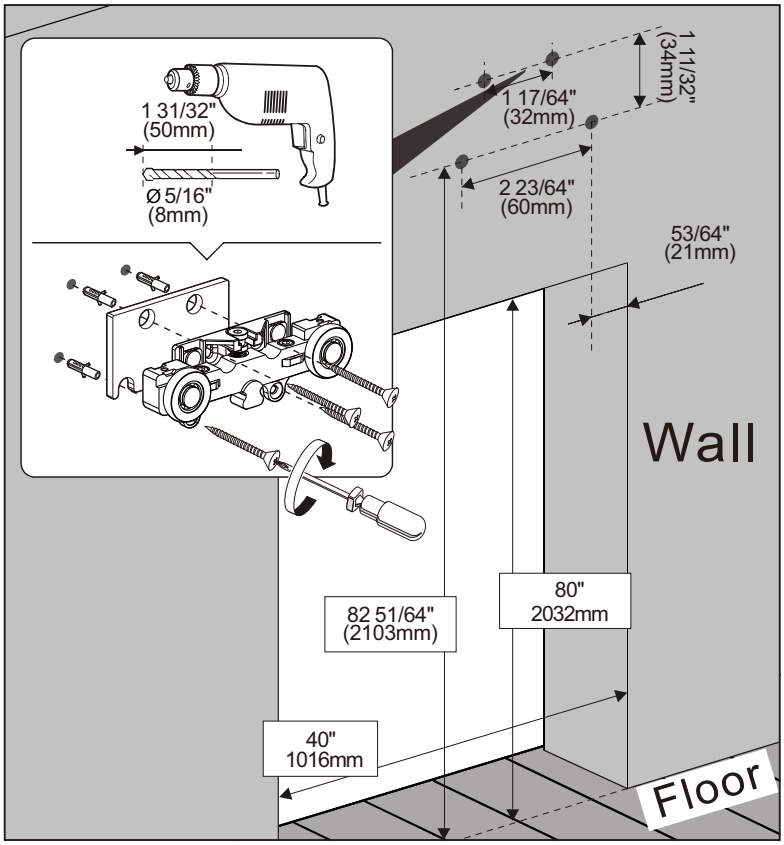


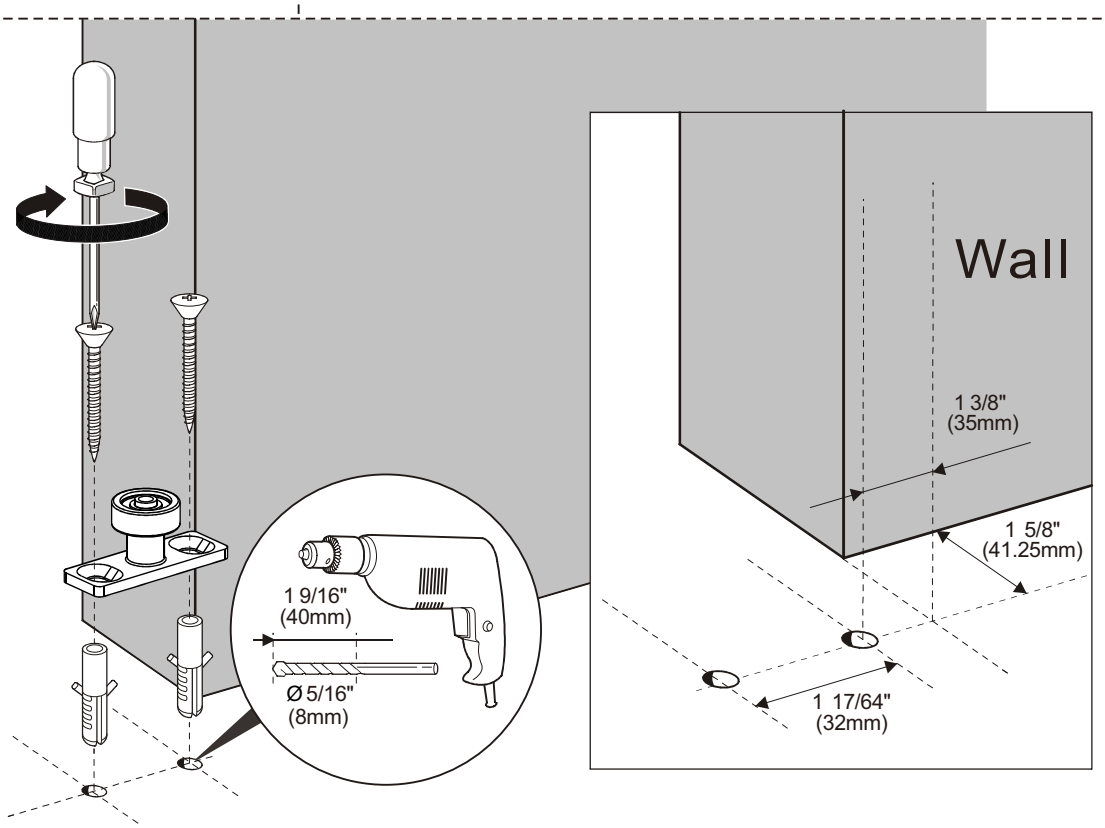


5 Install door slab(I) onto top track(C) and slide the door slab to ensure top roller(A) is at the center of track(C) horizontally

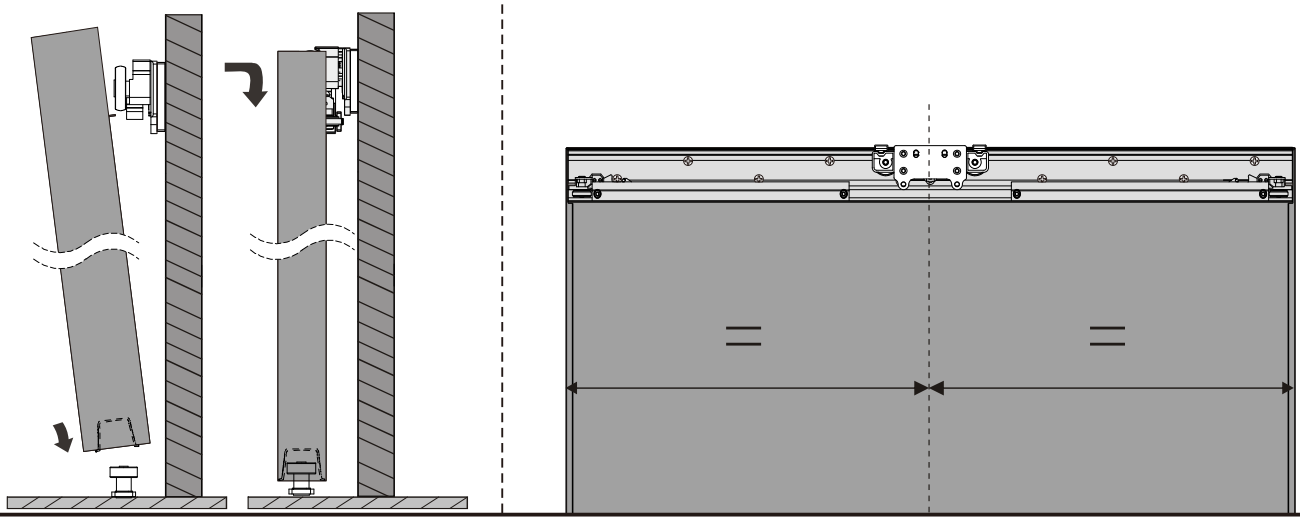


6 Fasten the screw to adjust the hanger height to ensure wheel touches the upper inside of track

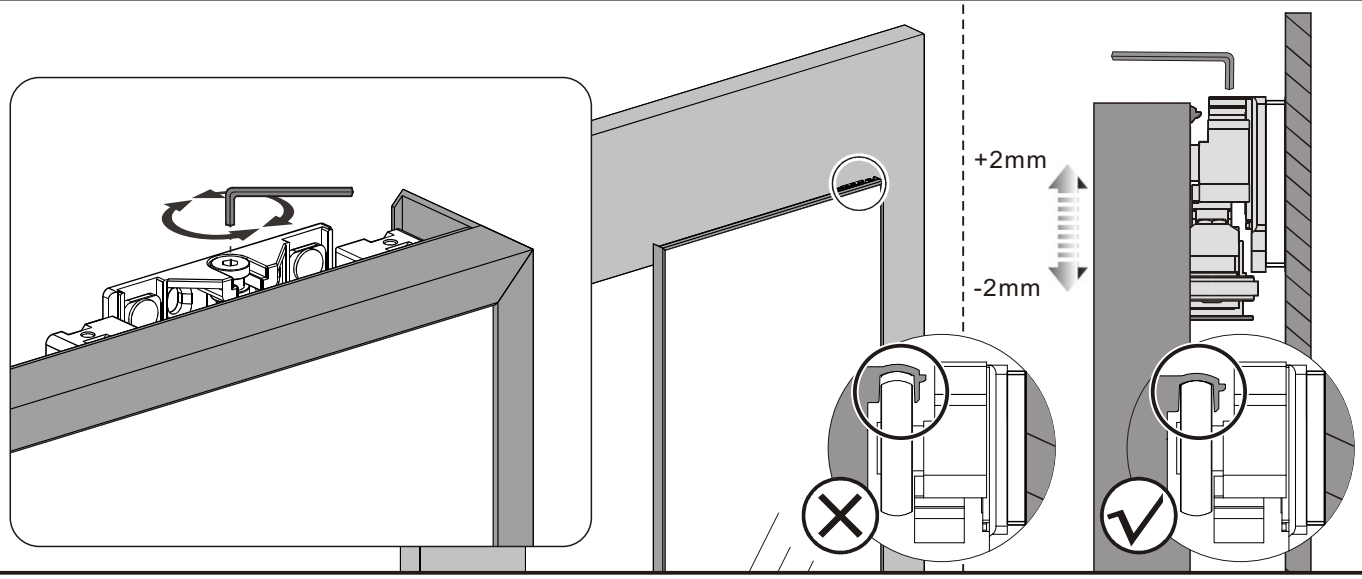


7 Tighten the anti-jump block

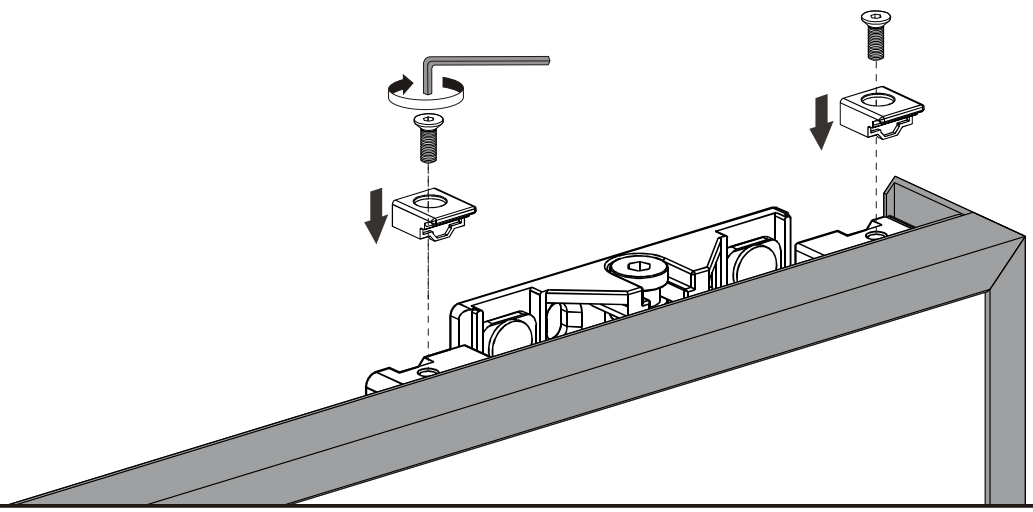



8 Slide the door slab both left and right to ensure actuator is in between the fin of soft close device

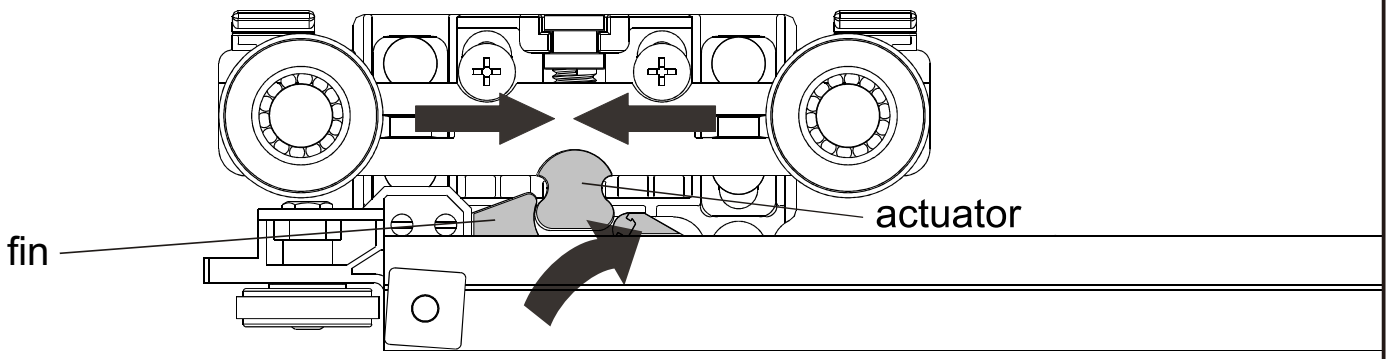

9 Adjust the tightness of the screw to ensure door slab(I) is parallel with wall

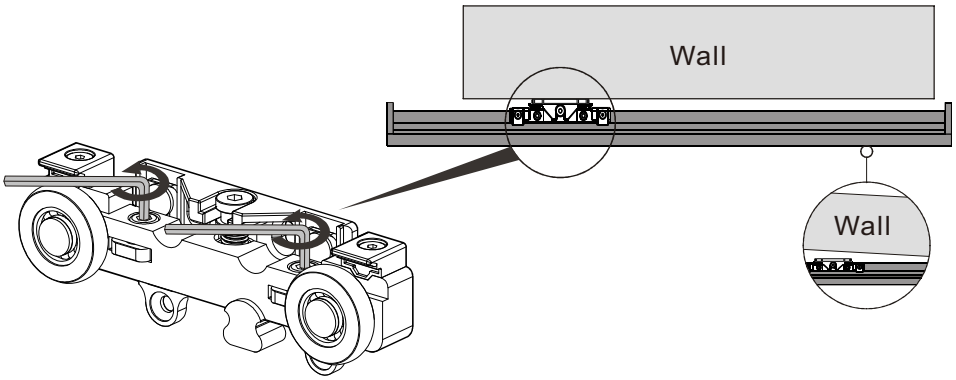

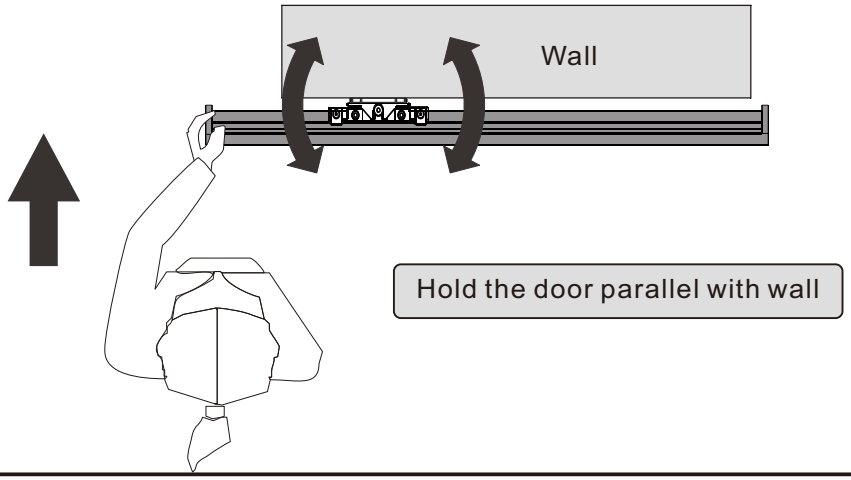

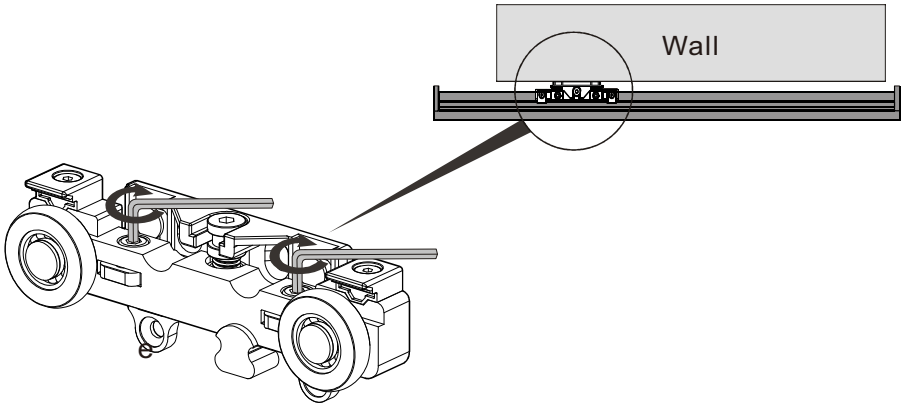

10 install flush pull(G) onto both sides of door slab(I)

