


# Installation 145-1


To avoid scratches and swallowing parts, please do not install by children!

| Hardware List                                                                     |                   | Hardware List |                                                                                    |              |   |
|-----------------------------------------------------------------------------------|-------------------|---------------|------------------------------------------------------------------------------------|--------------|---|
|  | Seat              | 1             |  | Backrest     | 1 |
|  | Armrest           | 1             |  | Seat cushion | 1 |
|  | Back cushion      | 1             |  | Sofa cover   | 1 |
|  | Inserted rod      | 4             |  | Legs         | 4 |
|  | Connecting buckle | 1             |   | 8x20mm screw | 2 |

**1** As shown in the figure: Insert the rod into the corresponding positions of the backrest and armrest.

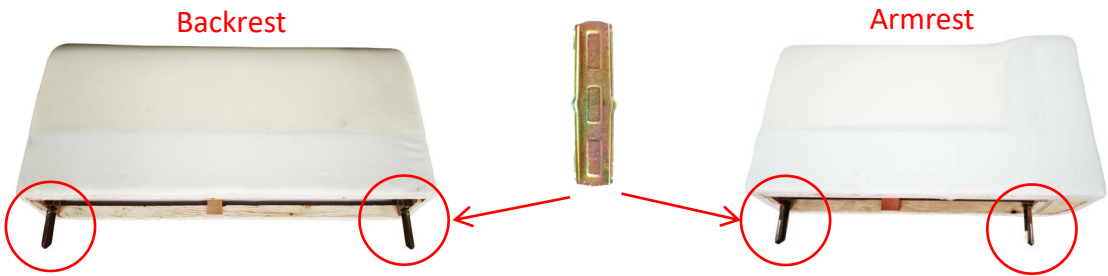


**2**

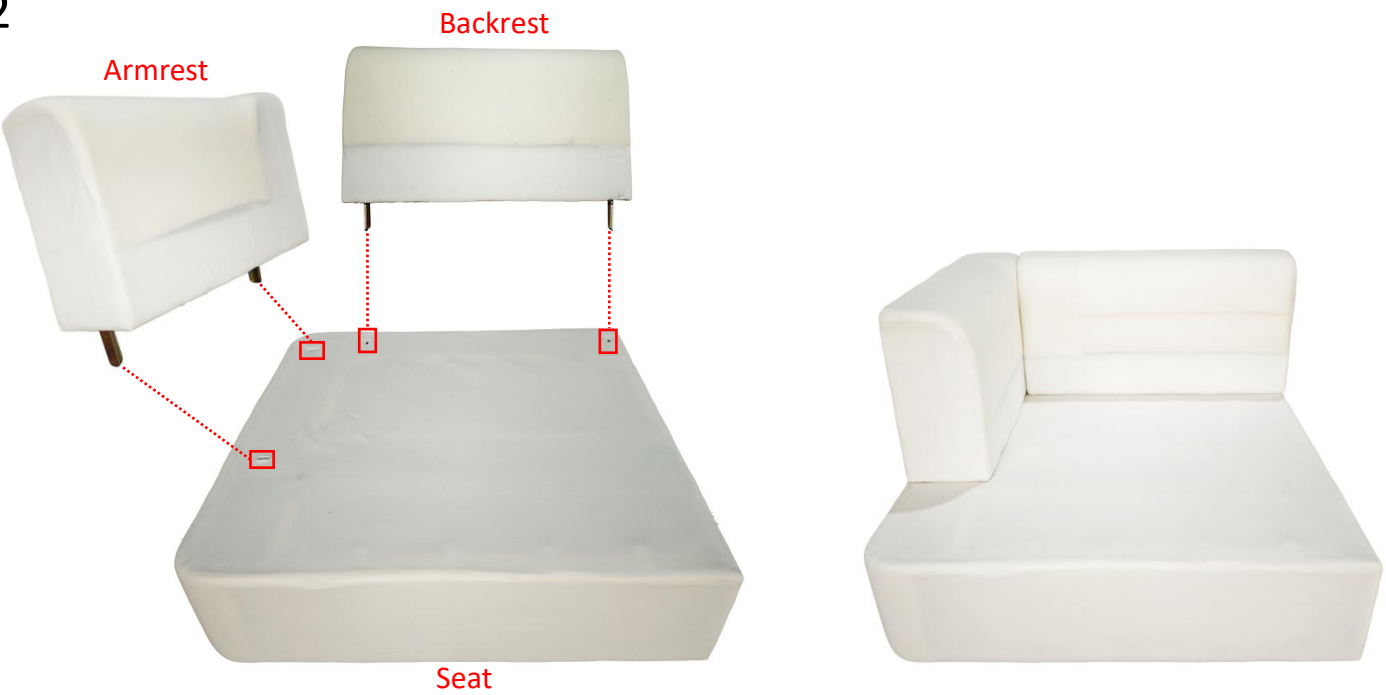

3

Put on the sofa cover.

Suggestion: you'd better not remove the protective strip before finish putting the cover on.

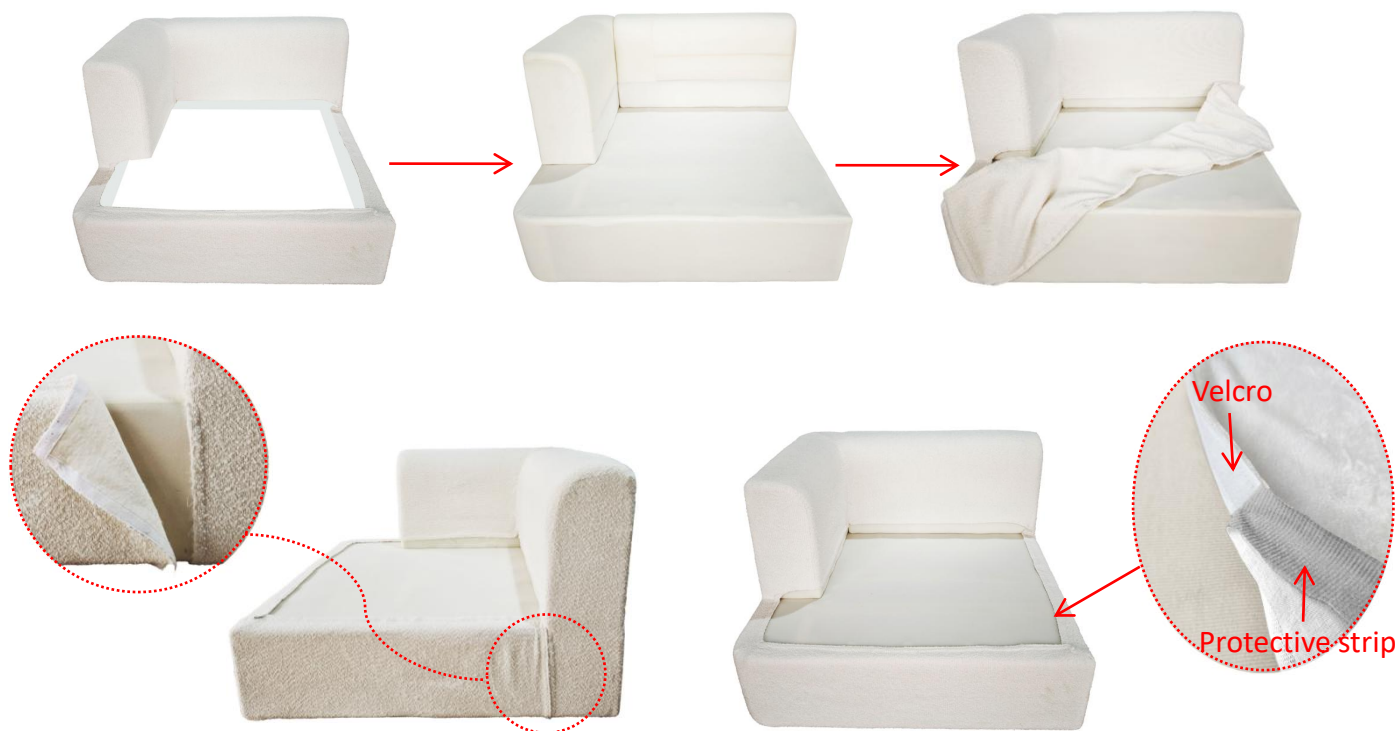

4



Secure the legs of the sofa.



5



Place the seat cushion and back cushion.

Note that the side with the zipper on the cushion should face the back.



6

Apply the connection buckles to connect the seats together(or not, it's totally up to users).

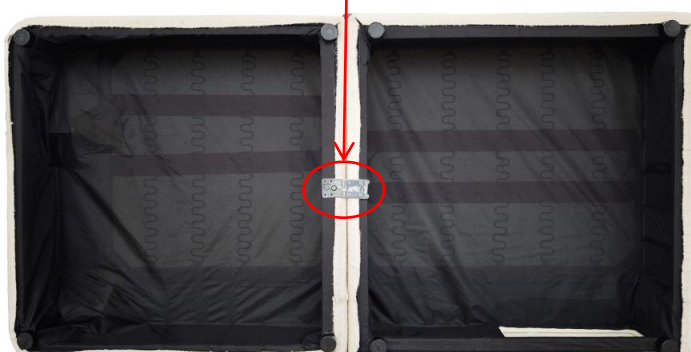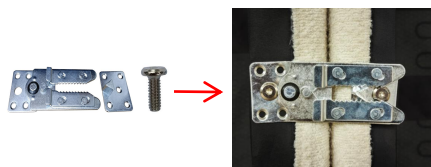

The seat cushion can be attached using Velcro.




# Installation 145-2


To avoid scratches and swallowing parts, please do not install by children!

| Hardware List                                                                     |                   | Hardware List |                                                                                    |              |   |
|-----------------------------------------------------------------------------------|-------------------|---------------|------------------------------------------------------------------------------------|--------------|---|
|  | Seat              | 1             |  | Backrest     | 1 |
|  | Armrest           | 1             |  | Seat cushion | 1 |
|  | Back cushion      | 1             |  | Sofa cover   | 1 |
|  | Inserted rod      | 4             |  | Legs         | 4 |
|  | Connecting buckle | 1             |   | 8x20mm screw | 2 |

1 As shown in the figure: Insert the rod into the corresponding positions of the backrest and armrest.

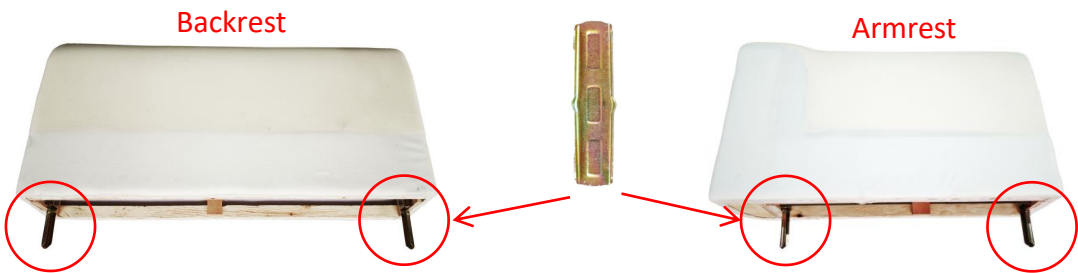



2

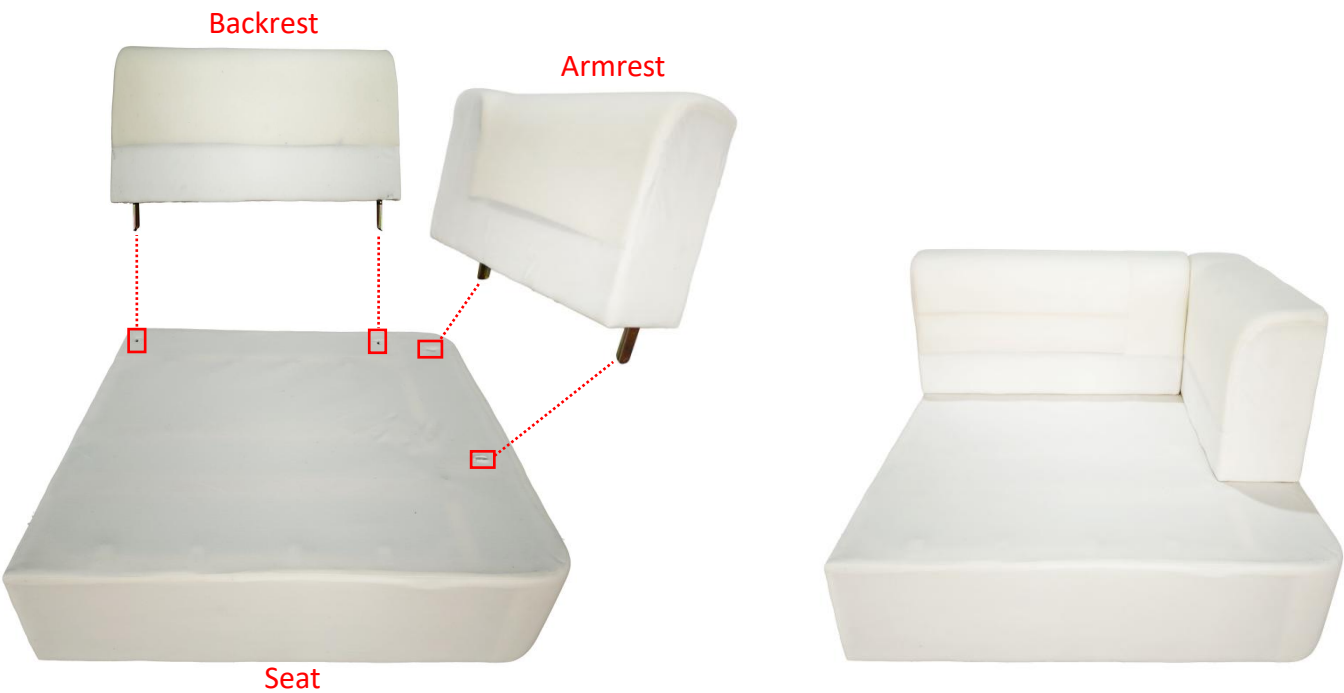

3

Put on the sofa cover.

Suggestion: you'd better not remove the protective strip before finish putting the cover on.

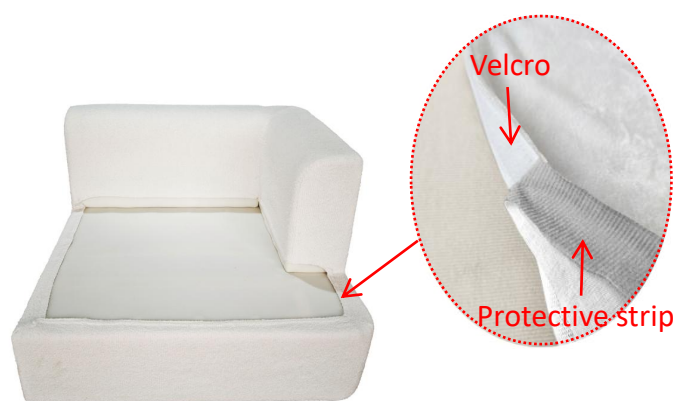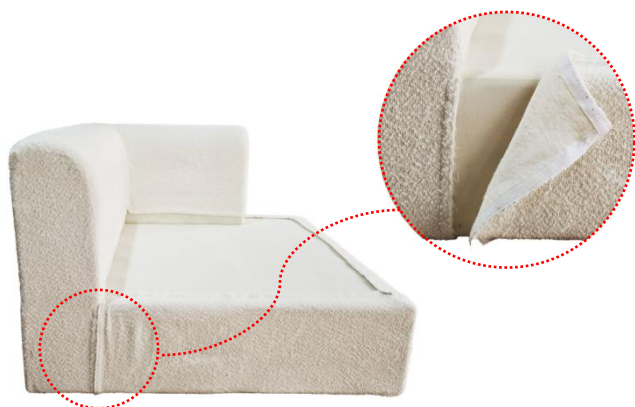

4




Secure the legs  
of the sofa.



5



Place the seat cushion and back cushion.

Note that the side with the zipper on the  
cushion should face the back.

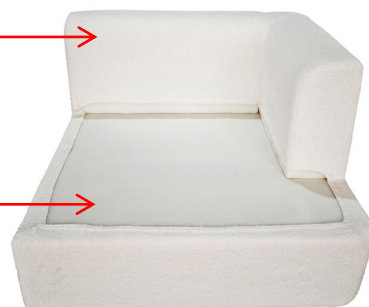

6

Apply the connection buckles to connect the  
seats together(or not, it's totally up to users).

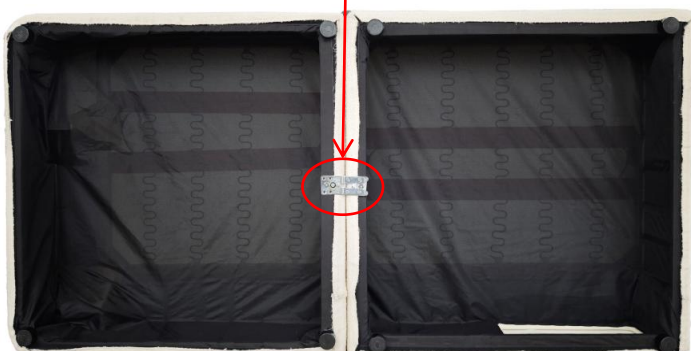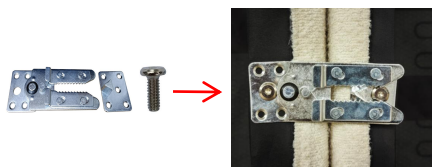

The seat cushion  
can be attached  
using Velcro.



# Installation 145-3

To avoid scratches and swallowing parts, please do not install by children!

| Hardware List                                                                     |   | Hardware List                                                                      |   |
|-----------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------|---|
|  | 1 |  | 1 |
|  | 1 |  | 1 |
|  | 1 |  | 4 |
|  | 2 |  | 1 |
|  | 1 |   | 2 |


1 As shown in the figure: Insert the rod into the corresponding positions of the backrest.



2 Cover the hole with a cover plate.




3

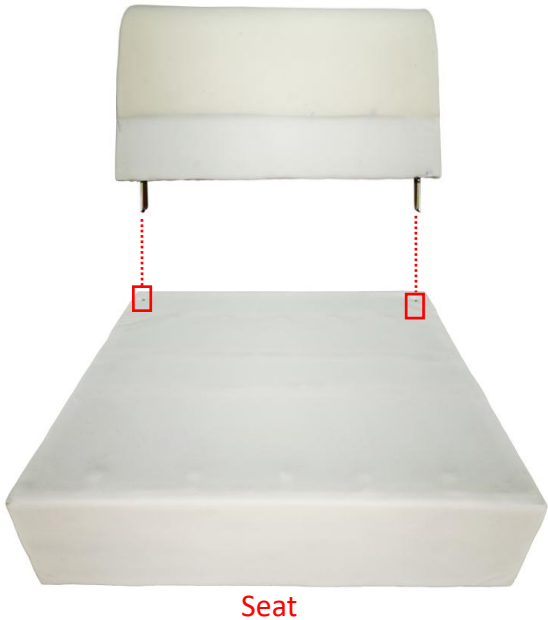

3

Put on the sofa cover.

Suggestion: you'd better not remove the protective strip before finish putting the cover on.

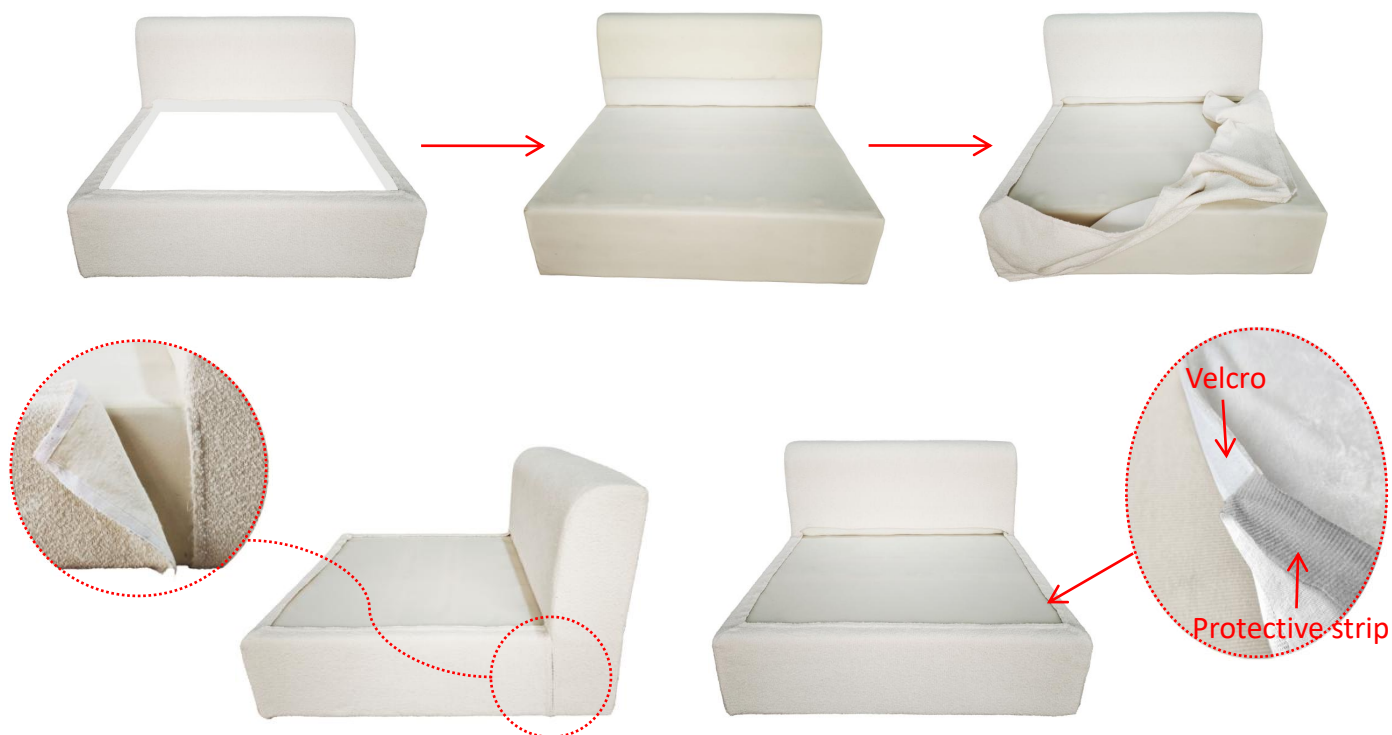

4




Secure the legs of the sofa.



5



Place the seat cushion and back cushion.

Note that the side with the zipper on the cushion should face the back.

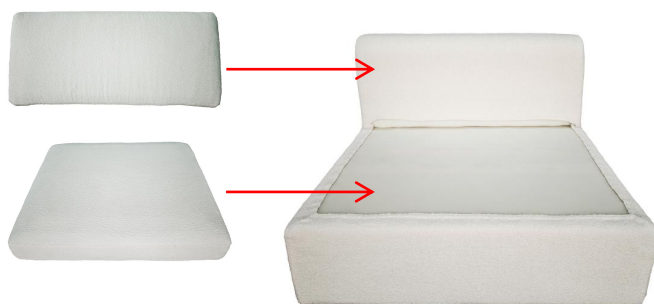

6

Apply the connection buckles to connect the seats together(or not, it's totally up to users).

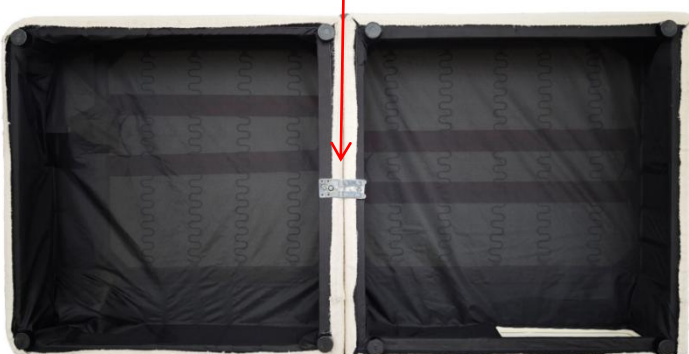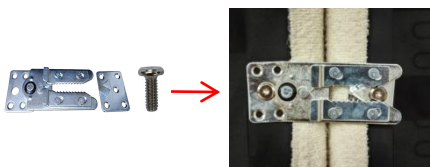

The seat cushion can be attached using Velcro.



# Installation 145-4

To avoid scratches and swallowing parts, please do not install by children!

| Hardware List                                                                      |              | Hardware List |  |
|------------------------------------------------------------------------------------|--------------|---------------|--|
|   | Ottoman seat | 1             |  |
|   | Sofa cover   | 1             |  |
|  | Seat cushion | 1             |  |
|  | Legs         | 4             |  |

- 1** Put on the sofa cover.  
Suggestion: you'd better not remove the protective strip before finish putting the cover on.



Be sure not to put it upside down.  
The wider side should be on top.


- 2** Secure the legs of the sofa.



- 3** Place the seat cushion on.



The seat cushion  
can be attached  
using Velcro.

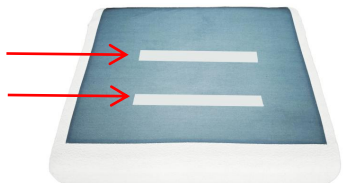


# Installation 145-5


To avoid scratches and swallowing parts, please do not install by children!

| Hardware List                                                                     |   | Hardware List                                                                      |                                          |
|-----------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------|------------------------------------------|
|  | 1 |  | 1                                        |
|  | 1 |  | 1                                        |
|  | 1 |  | 1                                        |
|  | 4 |  | 4                                        |
|  | 1 |  | Connecting buckle x1<br>8x20mm screws x2 |

1 As shown in the figure: Insert the rod into the corresponding positions of the backrest.

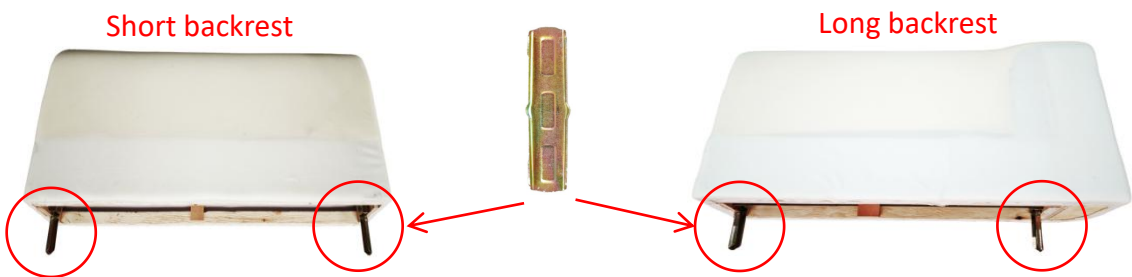

2 Cover the hole with a cover plate.

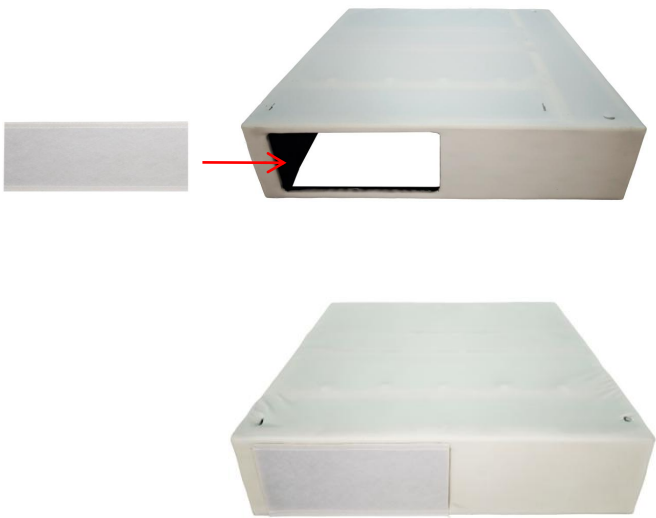

3



3

Put on the sofa cover.

Suggestion: you'd better not remove the protective strip before finish putting the cover on.



4




Secure the legs of the sofa.



5

Place the seat cushion and back cushion.

Note that the side with the zipper on the cushion should face the back.



The seat cushion can be attached using Velcro.



or



6

Apply the connection buckles to connect the seats together(or not, it's totally up to users).

