


FIGURE

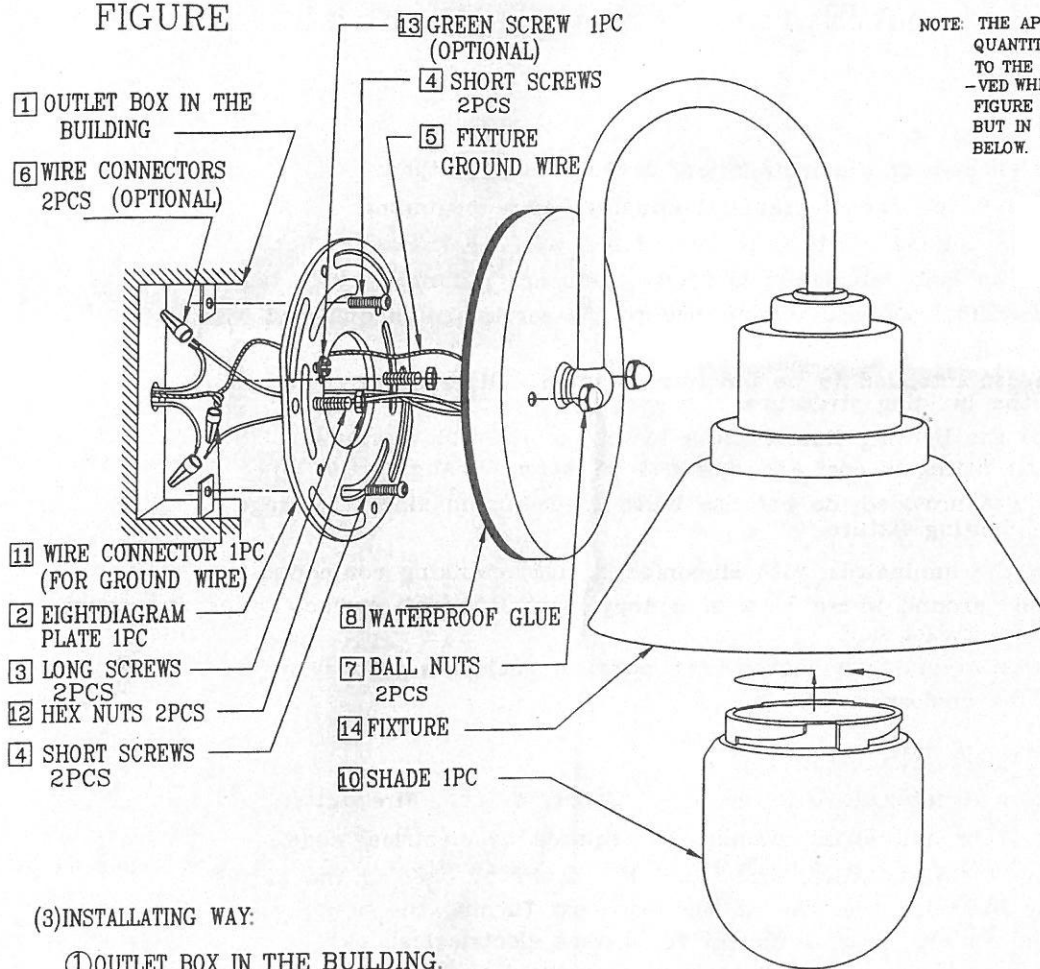

NOTE: THE APPEARANCE OF FIXTURE AND QUANTITY OF SOCKET(S) IS SUBJECT TO THE ACTUAL FIXTURE YOU RECEIVED WHICH IS DIFFERENT FROM THE FIGURE IN THIS INSTRUCTION SHEET, BUT IN SAME INSTALLING WAY AS BELOW.

(3) INSTALLING WAY:

- ① OUTLET BOX IN THE BUILDING.
- ② EIGHTDIAGRAM PLATE 1PC
- ③ LONG SCREWS 2PCS: INSERT INTO THE SCREW HOLES ON ②EIGHTDIAGRAM PLATE AND ADJUST TO SUITABLE LENGTH. FIX ③LONG SCREWS WITH ②HEX NUTS ONTO ②EIGHTDIAGRAM PLATE. WHEN ASSEMBLE ⑦BALL NUTS ON ③LONG SCREWS TO FIX ⑭FIXTURE, ③LONG SCREWS WILL NOT TURN.
- ④ SHORT SCREWS 2PCS: FASTEN ② EIGHTDIAGRAM PLATE TO ① OUTLET BOX WITH ④ SHORT SCREWS.
- ⑤ FIXTURE GROUND WIRE: TWIST ⑤ FIXTURE GROUND WIRE AND GROUND WIRE FROM OUTLET BOX, ⑪ WIRE CONNECTOR (PROVIDED).
- ⑥ WIRE CONNECTORS 2PCS (OPTIONAL): CONNECT FIXTURE WIRE WITH SUPPLY WIRE TOGETHER.
- ⑦ BALL NUTS 2PCS: MAKE ③LONG SCREWS PASS THROUGH THE HOLES OF ⑭FIXTURE, FIX ⑭FIXTURE AGAINST THE WALL WITH ⑦BALL NUTS. PLEASE PAY ATTENTION THAT WHEN INSTALL THE FIXTURE, THE HOLE ON SIDE EDGE OF ⑭FIXTURE SHOULD BE AT BOTTOM, IN CASE WATER GOES INTO THE OUTLET BOX, IT CAN DROP OUT.
- ⑧ WATERPROOF GLUE: AFTER SECURING ⑭FIXTURE, BRUSH ⑧WATERPROOF GLUE AT THE EDGE OF ⑭FIXTURE WHERE TOUCH THE WALL, SO AS TO PROOF WATER AGAINST OUTLET BOX. PAY ATTENTION NOT TO BRUSH ⑧WATERPROOF GLUE ON SIDE EDGE HOLE OF ⑭FIXTURE, OTHERWISE THE WATER IN OUTLET BOX CAN NOT DROP OUT.
- ⑨ TURN ON ELECTRICITY AFTER ASSEMBLING THE BULBS, TO TEST IF THE ELECTRICITY CAN WORK NORMALLY. (MAKE SURE THE BULBS CAN WORK)
- ⑩ SHADE : PUT NECK OF ⑩ SHADE IN PLACE BY INSERTING DIMPLES LOCATED IN ⑭ FIXTURE, REVOLVE ⑩ SHADE AS THE FIGURE, AND SECURE ⑩ SHADE TO ⑭ FIXTURE TAKE CARE WHEN ASSEMBLING OR DISASSEMBLING ⑩ SHADE TO AVOID THE BREAK OF ⑩ SHADE.

(1) ATTENTION


- 1.1 To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
- 1.2 All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with the methods of installing electrical wiring, secure the services of a qualified licensed electrician.
- 1.3 These fixtures are intended to be building mounted and must be supported by the building structure.
- 1.4 Do not operate the lighting fixture close to any combustible material.
- 1.5 Ensure that the fitting is cool and switched off before changing the bulb.
- 1.6 The bulbs are not provided, do not use bulbs exceeding maximum wattage as marked on lighting fixture.
- 1.7 After installing the luminaires ,with silicon(ex.GE-108) caulking compound.
 - 1.7.1 Caulk completely around where back of canopy meets the wall surface to prevent water from seeping into outlet box.
 - 1.7.2 Caulk completely around gap between the parts of enclosure to prevent water from seeping into the enclosure.

(2) CAUTION BEFORE INSTALLATION

- 2.1 Prepare tools and materials required, e.g.: Ladder, Wrench, Wire cutter, Screw driver, Bulbs and Wiring supplies as required by electrical code.
- 2.2 Before starting the installation, disconnect the power by opening the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.
- 2.3 If you are replacing an existing fixture, disconnect and remove the old fixture.Expose the supply wiring.
- 2.4 No rough or sharp edges are in contact with any of the wire , to ensure the insulation on any of the wires has not been damaged during installation.
- 2.5 The bare or green insulated wire are for grounding, do not connect with current carrying wires.
- 2.6 Connect black (or smooth) fixture wire with black supply wire, white (or rough) fixture wire with white supply wire, After fixture wires are connected with supply wires, the bare parts need to be completely covered by connector, to prevent from causing short circuit and electric leakage.

The method of wiring and operation refer to circuit diagram 1 and circuit diagram 2:

Circuit diagram 1

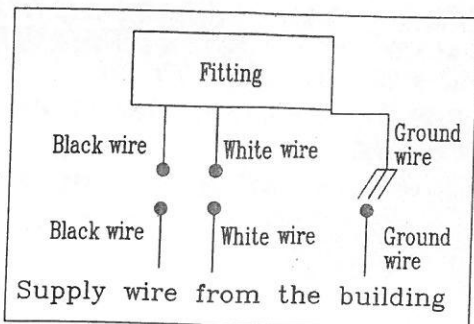

Circuit diagram 2

