


# Installation and Users Instructions

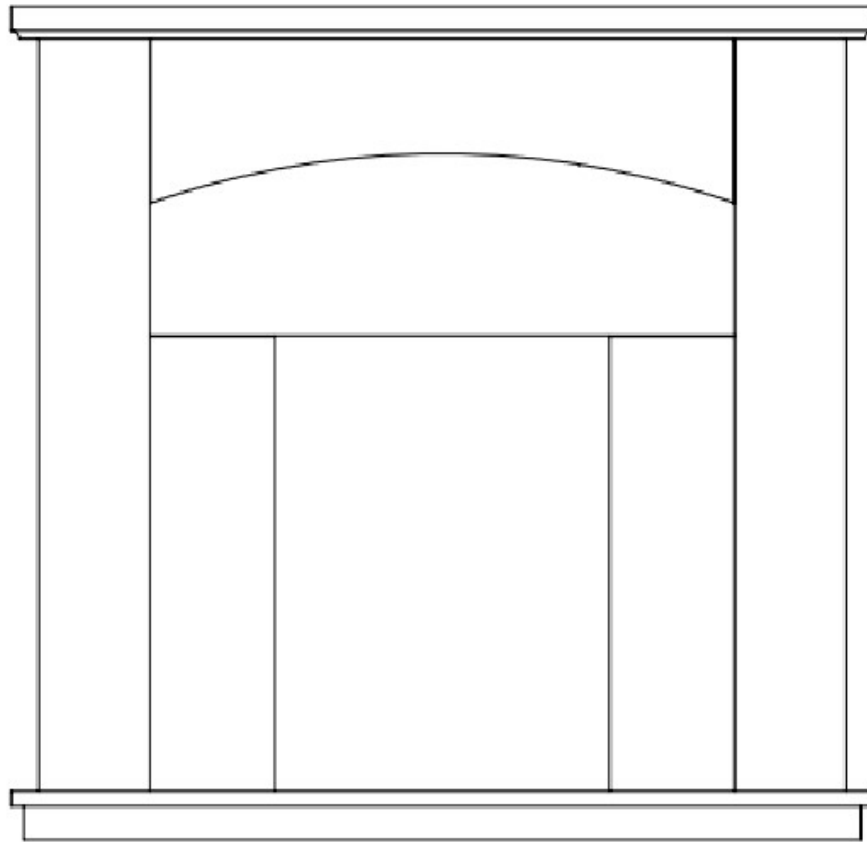


**Model:            Fireplace Mantel**

For use with E112RML - 2kW Electric Fire

**PLEASE READ THIS MANUAL BEFORE INSTALLING AND USING THE APPLIANCE.  
INSTALLER: DO NOT DISCARD THIS MANUAL – LEAVE WITH THE CUSTOMER  
SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.**

## SECTION 1 DIMENSIONS


Dimensions in mm

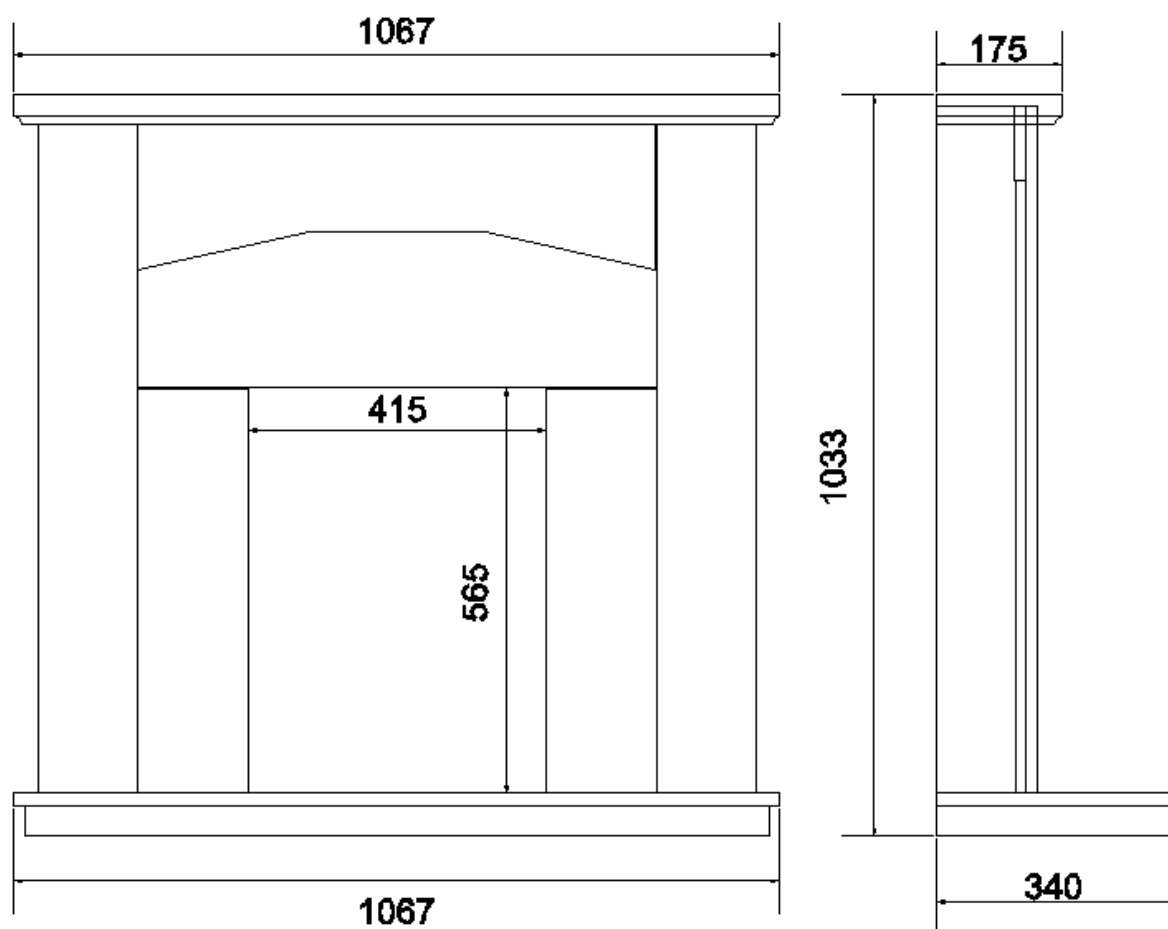



## SECTION 2 ASSEMBLY AND INSTALLATION

### 2.1 Unpack

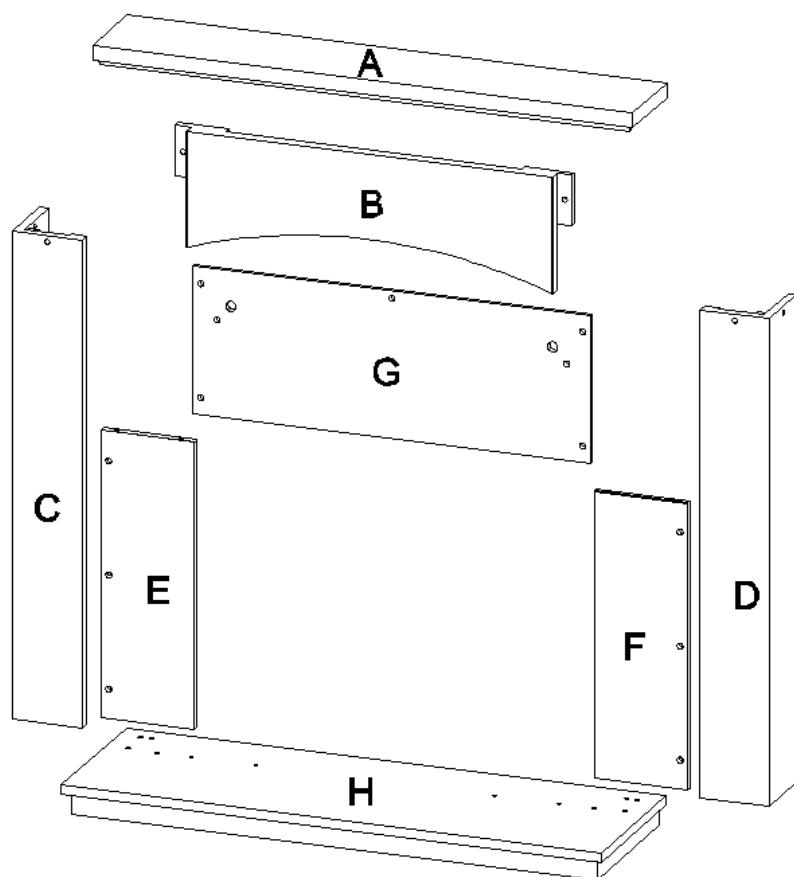- Open the package carefully and remove all pieces. Carefully inspect each part for any damage before you begin assembly.
- Make sure that you have all the parts listed below before assembling.



No.	Name	Quantity
A	Top panel	1
B	Front top panel	1
C	Left side panel	1
D	Right side panel	1
E	Second left panel	1
F	Second right panel	1
G	Second top panel	1
H	Base panel	1
I	Wood dowel $\varnothing 6 \times 30$	8
J	Wood dowel $\varnothing 8 \times 30$	4
K	Washer 	24
L	Screws M6*30mm 	24

**NOTE:** left and right of product are distinguished by its front view.

## 2.2 Before installation


Tools required: Phillips screwdriver




## 2.3 Installation

### NOTE!


- Assembly required by two adults.
- Loosely fit all screws then tighten both sides simultaneously to ensure the surround is square.
- This fireplace suite must be fitted to the wall. Mirror plates are supplied with the electric fire but any other suitable concealed fixing may be used.
- Use manual screwdriver only.
- Use washer when fixing with screws. Do not overtighten bolts.
- Do not use screws of other types or models, in case that the screws are too long, causing damage to mantels.
- Only fit the fire from the back of the fireplace so as not to scratch the mantel.

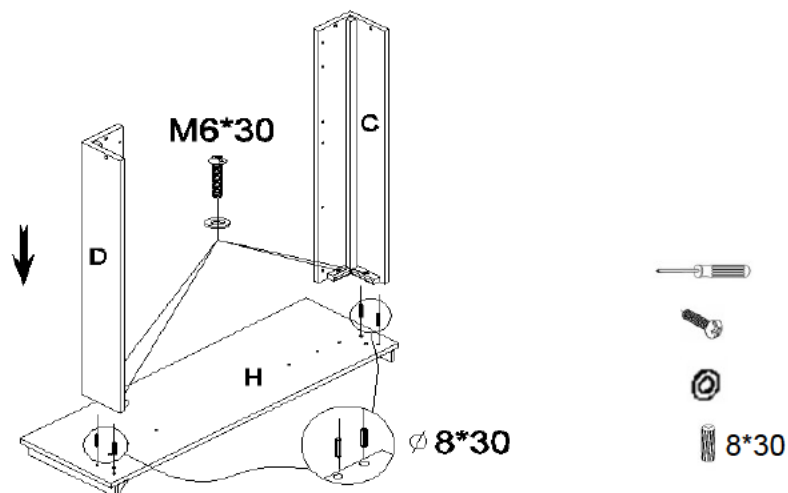


**Step1.** Fix the side panels (C&D) onto base panel (H).

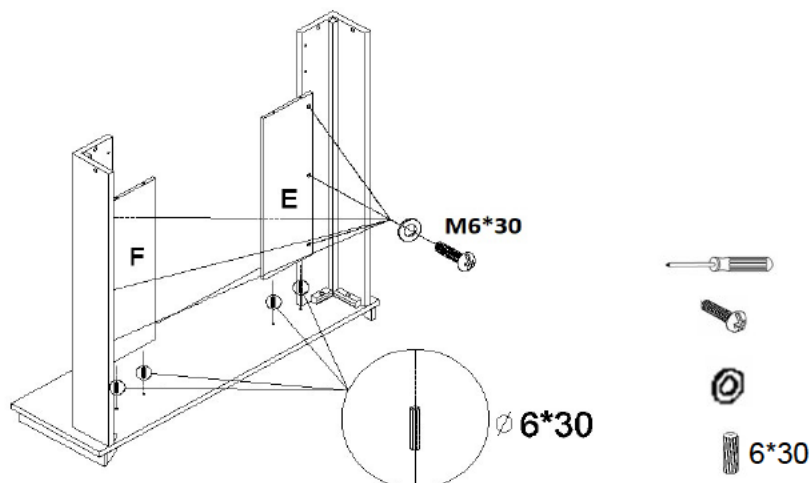




**Step 2.** Fix the second left and right panel (E&F) to the side panels (C&D).

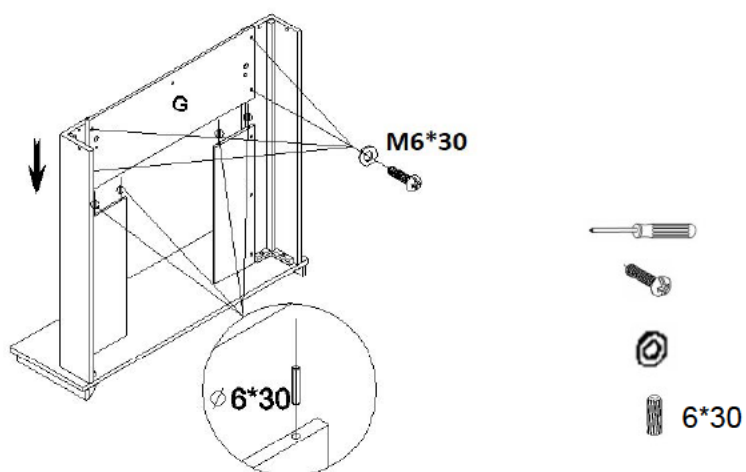

**Step 3.** Fix the second top panel (G) to side panels (C&D) and second side panels (E&F).

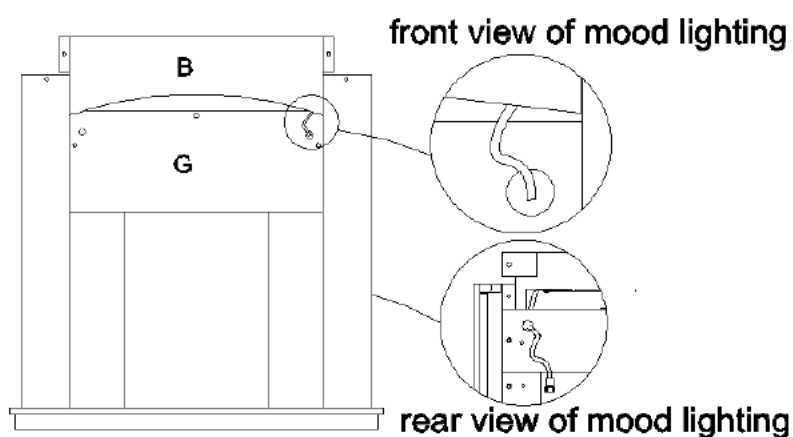

**Step 4.** Before fixing front top panel (B) Pass the socket and wire of mood lighting fixed to panel through the hole on the second top panel (G); Check that the led strip is still pushed firmly down into position on the self- adhesive pads.

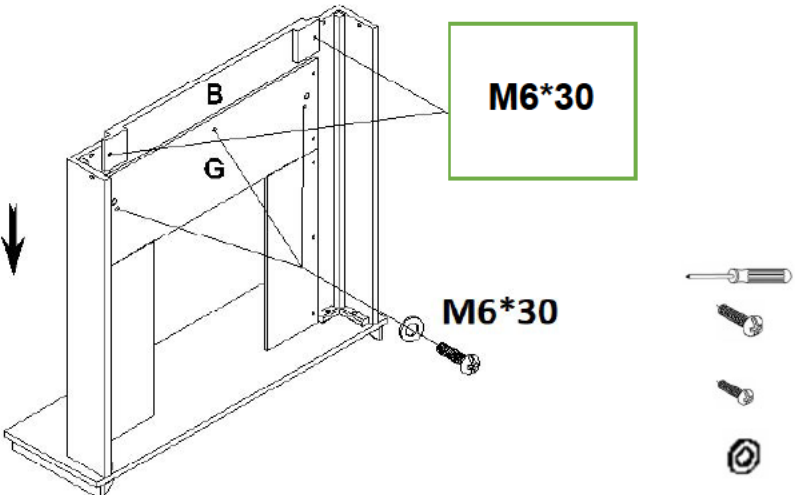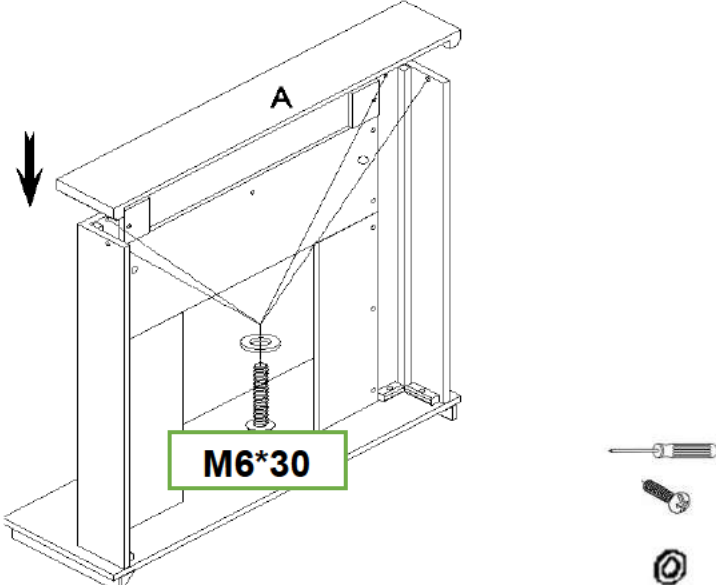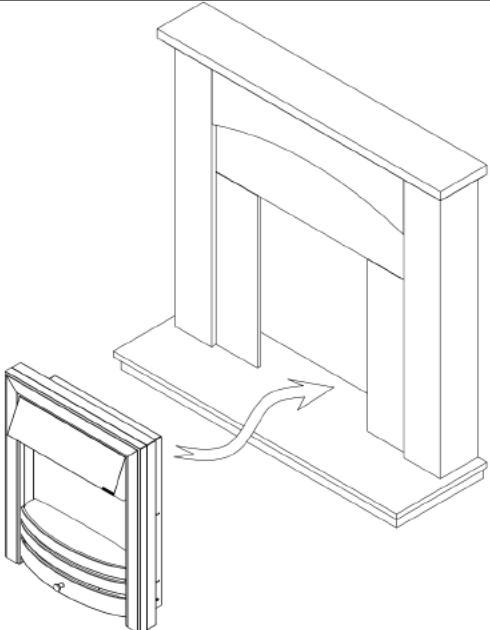	<p><b>Step 5.</b> Fix the front top panel (B) to side panels (C&amp;D) and second top panel (G) using screws and washers provided.</p>
	<p><b>Step 6.</b> Fix the top panel (A).</p>
	<p><b>Step 7.</b> Install the fire from front of the mantel. Note the fire must be fixed in position. Two screws should be positioned as detailed in the fire instructions to locate the fire on its key hole slots on the rear of the front frame.</p>

**NOTE:** This fireplace must be fixed to the wall. Mirror plates are supplied but any other suitable concealed fixing may be used.

## SECTION 3 CLEANING & MAINTAINENCE

1. Your fireplace mantel surface coating will give off a slight smell for a short period of time. Try to ventilate as much as possible during this time.
2. Daily cleaning: Clean the mantel surfaces with a soft, lint-free cloth. Do not use cleaning or polishing products and try to avoid heavy or sharp articles which may damage the surface.
3. Avoid long-term direct sunlight, and excessive temperatures and humidity to protect the life of your furniture surface.