



# Wellcomme™ Ultra

Rear spud flushometer bowl  
**K-96054**

## Features

- Elongated bowl, standard height.
- 1-1/2" (38 mm) rear spud.
- 10" x 7" (254 mm x 178 mm) water surface.
- 2-1/8" (54 mm) fully-glazed trapway.
- Available with antimicrobial finish K-96054-SS.

## Material

- Vitreous china.

## Technology

- Designed to outperform competitors in bowl cleanliness and plug resistance.
- Maximum waste removal.
- Engineered for toilet seat cover removal.
- Excellent bowl rinse.
- Engineered to flush effectively in buildings with low supply pressure and flow.
- Maximum drain line carry at all flush volumes per ASME standard.

## Installation

- 26-3/8" L x 14-7/8" W x 15-1/4" H.
- Replaces Wellcomme K-4349. Height and footprint may vary.
- 11" rough-in.

## Water Conservation & Rebates

- 1.28 gpf - 1.6 gpf (4.8 - 6.0 lpf) flush range.
- The ultra-low water consumption is ideal for water conservation and can help earn Water Efficiency points in the LEED® Green Building Rating System.

## Recommended Products/Accessories

K-23726 Drain treatment  
K-23724 Toilet cleaner & disinfectant  
K-23734 Toilet bowl cleaner & disinfectant

## Included Components

Additional Components:  
Bolt cap accessory pack  
Spud



## Codes/Standards




ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)


## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	7	Black Black™

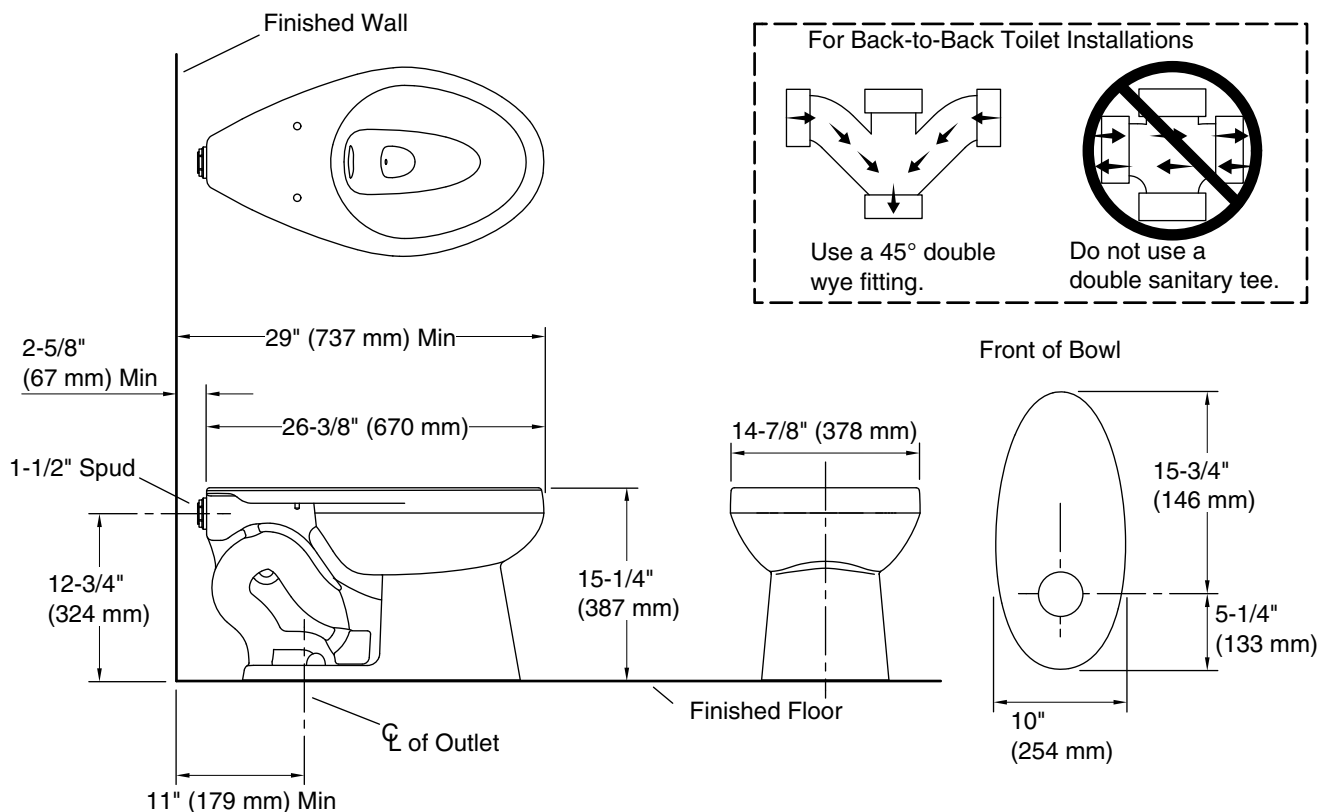

### Technical Information

All product dimensions are nominal.

Toilet type:	Flushometer, Floor-mount
Waste Outlet:	Floor
Flush type:	Flushometer valve siphon
Spud size:	Inlet, Rear
Trap passageway:	2-1/8" (54 mm)
Water surface size:	10" x 7" (254 mm x 178 mm)
Rim to water surface:	6" (152 mm)
Rough-in:	11" (279 mm)
Seat-mounting holes:	5-1/2" (140 mm)

### Fixture Supply Requirements

Min static pressure:	35 psi (241.3 kPa)
Max static pressure:	80 psi (551.6 kPa)
Min flowing pressure:	25 psi (172.4 kPa)
Min flow rate:	25 gpm (94.6 lpm)

### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

If Fixture Supply Pressure is below 35 psi static, then fixture must be paired with a valve rated at 1.28 gpf or greater.