

Description

Name	DK-G63
Battery	24V7AH
Motor	24V12000 RPM of 555# 200W driving motor 24V5000 RPM of 390# steering motor
Maximum weight	80 KGS/176LBS
Dimension	1585*930*810 mm / 62.4*36.61*31.89INCH
Speed	3-8 KM/H 1.86-4.96MPH
Charging time	8-12 hours
Remote control battery	AAA battery 1.5V*2 (not including)
Applicable age	37-95 months
Charger specification	Input: 110V 24V Output: DC28.8V800mA or DC24V1000mA

Mercedez AMG G63



SKU NO.: FR8990

Model: DK-G63

Applicable age: 37-95 months

Maximum weight: 80 KGS/176LBS

Execution Standard:

GB6675&GB19865 EN71&EN62115 ASTM-F963



Charging the Drive Battery:



IMPORTANT! Before using the unit for the first time the battery needs to be charged for at least **8 to 12 hours** - no more than **20 hours**. Once battery is depleted, recharge for **8 to 12 hours** - no more than **20 hours**.

IMPORTANT!

Check the drive battery and charger (supply cord, connector) for wear and damage before charging. Do not charge the battery if damage has occurred. Only replace with the same type and voltage rechargeable battery and charger supplied by the manufacturer.

- Only use the rechargeable battery (or equivalent replacement) and charger supplied with your vehicle.
- Always turn power off and charge battery after riding.
- The drive battery should be charged when depleted, or if not used regularly, once a month. Failure to charge the battery as directed will cause permanent damage to the battery and will void the warranty.

STEPS:

1. Locate Charging Port.
2. Plug Charger plug into unit Charging Port.
3. Plug Charger into Wall outlet.
4. When battery is fully charged, unplug charger from the wall outlet and disconnect from charger port.

NOTE: The charger may feel warm during the charging. If excessively hot, unplug and replace.

NOTE: This product has charging protection: When charging, all functions are turned OFF.

AMG, „Mercedes-Benz“ and  are the intellectual property of Mercedes-Benz Group AG. They are used by Pinghu Dake Baby Carrier Co.,Ltd under license.



The BRP, Can-Am, Rotax, and Maverick trademarks, logos and designs are the intellectual property of Bombardier Recreational Products Inc. and are used under license by Pinghu Dake Baby Carrier Co., Ltd.


Warning: This is a Child's Toy and NOT intended for Off-Road Use.

Installation steps

1. Spare parts list

Car body 1 PC	Steering wheel 1 PC	Rearview mirrors 1 Pair
Window shield 1 PC	Backrest of seat 1 PC	Baseplate of seat 1 PC
Hood 1 PC	Hood carriage 1 PC	Windows 1 Pair
Driving motors 2 or 4 PCS	Rear axle 1 PC	Wheel cover 4 PCS
Rear bumper 1 PC	Rear upper part 1 PC	Spare tire 1 PC
Rear support board (1) 1 PC	Rear support board (2) 1 PC	Spanner 2 PCS
Remote control 1 PC	Charger 1 PC	Manual 1 PC
Decoration parts of exhaust pipe 1 Pair		
MP3 line 1 PC (not including without MP3 player)		
7 inch Removable MP4 player 1 PC (Optional)		
Wheels 4 PCS:		
Under 2 motors version - there is plum blossom connection part on each rear wheel;		
Under 4 motors version - there is plum blossom connection part on each wheel;		
Fixed tableting of mute motor 2 PCS (Under mute motors version)		
Screw bag: 1 PC		
Including: M16 gasket - 2 PCS(only under 2 motors version); M12 gasket - 5 PCS;		
M4*12mm big flat head screw (black zinc-plated) - 38 PCS;		
M4*16mm big flat head screw - 14 PCS; M10 nut - 1 PC;		
M5*35mm screw - 5 PCS (Under mute motors version);		
M5 nut - 5 PCS(Under mute motors version);		

2. Names of spare parts

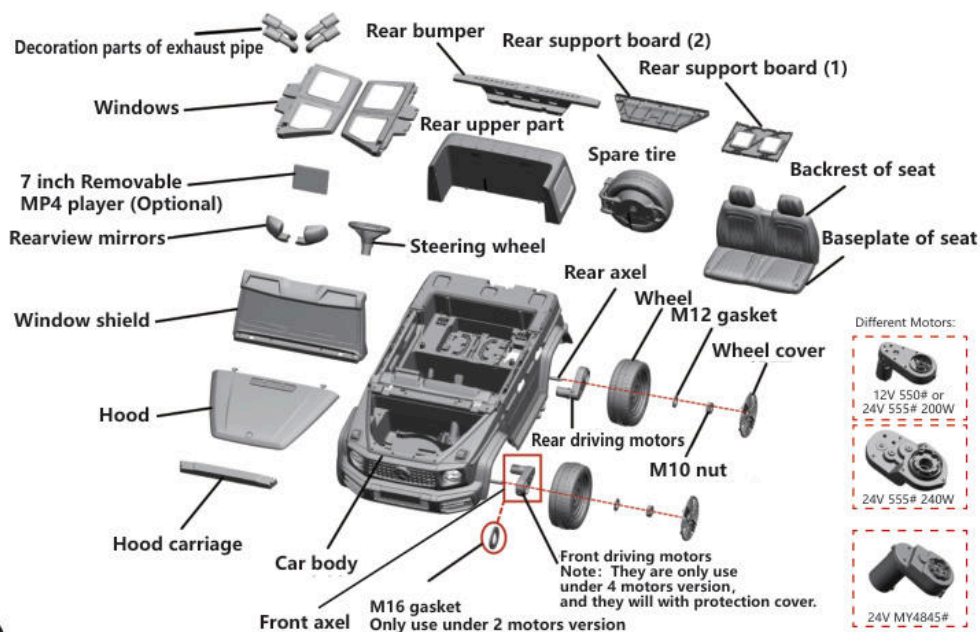

Different Motors:



Instructions

- While driving, adult supervision is required all the time.
- Always wear a helmet when driving.
- Please don't drive near road or on the footpath.
- It is not recommended to drive the vehicle on wet surface or on slope greater than 15-degree.
- It is recommended to drive this vehicle on smooth surface only.
- Please don't drive this vehicle outdoors when it is raining.
- Make sure that the vehicle stop completely before changing direction from forward to reverse.
- Please don't allow children to operate the charger or play with the battery.
- Clean the vehicle with a dry cloth only.
- Please follow the correct weight and age limits allowed to drive this vehicle.
- It is prohibited to change the circuit or add other electric parts.
- Adults must teach their children about safe driving procedures.
- Please turn the power off when not in use.
- Check the seat to ensure it has been fitted and secured with a bolt before driving.
- Inspect all wires and connection of the vehicle periodically.
- Charging the battery should only be done by adults.
- Charging plug is located underneath the seat.
- In order to avoid accidents, please ensure the vehicle is safe before driving.
- Please don't let children touch the wheels or be near them when the car is moving.
- Please mind fingers when opening and closing doors.

WARNING:

To reduce the risk of injury, adult supervision is required. Never use in roadways, near motor vehicles, on or near steep inclines or steps, swimming pools or other bodies of water; always wear shoes, and never allow more than 2 riders.

Warning: This toy has no brake.

Warning: This toy cannot be used in the sands.

WARNING!

For safety reasons,
 *please use this vehicle under adult guidance and supervision.
 *do not use this product on main roads, slopes, highways or other dangerous places.
 *children must wear shoes and protective gears when operating the vehicle.
 *children should be seated with the seat belt fasten when driving.
 *only load a maximum of 80Kg on the vehicle.
 *only children aged 37 - 95 months should be allowed on this vehicle.
 *use this toy strictly according to safety manual.
 *please check the tires, breaks, steering wheels, seats and seat belts before operating vehicle.
 *this toy vehicle should be used with caution and requires skill to avoid fall or collision with third parties.
 *Non-rechargeable batteries are no to be recharged;
 *The supply terminals are not to be short-circuited.
 *Rechargeable batteries are to be removed from the toy before being charged;
 *The toy should be regularly examined for damage to the cord, plug, enclosure and other parts, and in the event of such damage, they must not be used until the damage has been repaired.
 -Only use the battery specified by the manufacturer
 -Only use the charger specified by the manufacturer.
 Pictures are for reference only, please adhere to the original Products as standard

The product must be assembled by Adults.

Warning! Not suitable for children under 36 months.

Long cord. Strangulation hazard.

Pictures are for reference only, please adhere to the original products as standard

WARNING:

The car contains battery that are non-replaceable.

The instruction manual must be retained since it contains important information.

WARNING:

For the purposes of recharging the battery, only use the detachable supply unit provided with this toy, DC adaptor.

WARNING:

The remote control is not a toy, it is for adult use only, and should not be used by a child. A close adult supervision is always required. Reception range may change significantly with weather, battery, and other environmental conditions.

WARNING:

RISK OF FIRE. DO not bypass. Replace only with HY2025RX-SE-12V DC 12V Max 40A or HY2005RX-RM-24V DC 24V Max 40A.

Troubleshooting

Problem: The vehicle cannot be driven.

Cause of the problem: the battery is insufficient

Please charge in time after each use, and charge at least once a month.


It is recommended to charge for 8-12 hours, not more than 20 hours.

Problem: The car does not move.

Answer: The battery is low, please charge for 8-12 hours

but not exceeding 20 hours.

Charge at least once a month to keep the battery cells active.

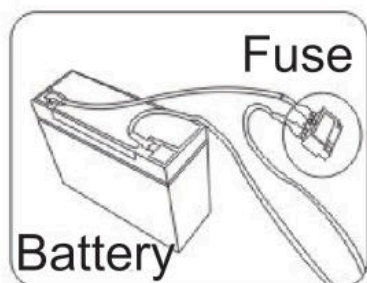

To avoid short fuse or power cut off:

1. Do not overload the product. Max load is 80 Kg.
2. Do not drag any item behind this product.
3. Do not allow water or any liquid into electric parts.
4. Do not change wire system without a professional.

TROUBLESHOOTING

Problem: The car only runs for a short time.

Answer 1: The battery is low, please charge for 8-12 hours

but not exceeding 20 hours.

Charge at least once a month to keep the battery cells active.

Answer 2: The battery may need to be replaced depending on its charging history and age.

Problem: The sound does not work.

Please ensure the volume is turned up and the MP3 line is not connected. Sounds from steering wheel will not work when MP3 is plugged in.

Problem: Charger overheating.

It is normal for battery and charger to be slightly warm during charging. If the charger feel excessively hot, please check for a current overload or battery short circuit.

3. Installation steps


Step 1: Take out rear upper part

Take out rear upper part of the car for coming use.



Step 2: Install rear support board (1)


Put the rear support board (1) onto the car body, and then fix it with 6 pcs of M4*12mm big flat head screws.

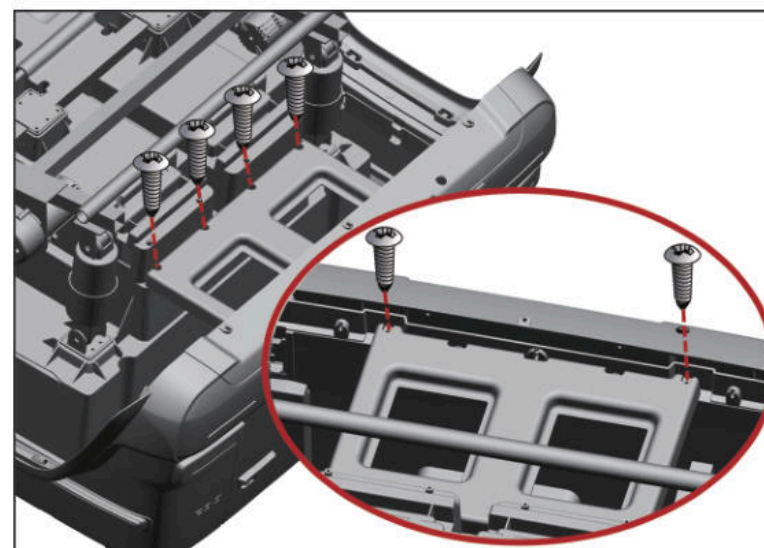

Installation steps


Step 3: Install rear support board (2)

Put the rear support board (2) onto the car body, and then fix it with 7 pcs of M4*12mm big flat head screws.

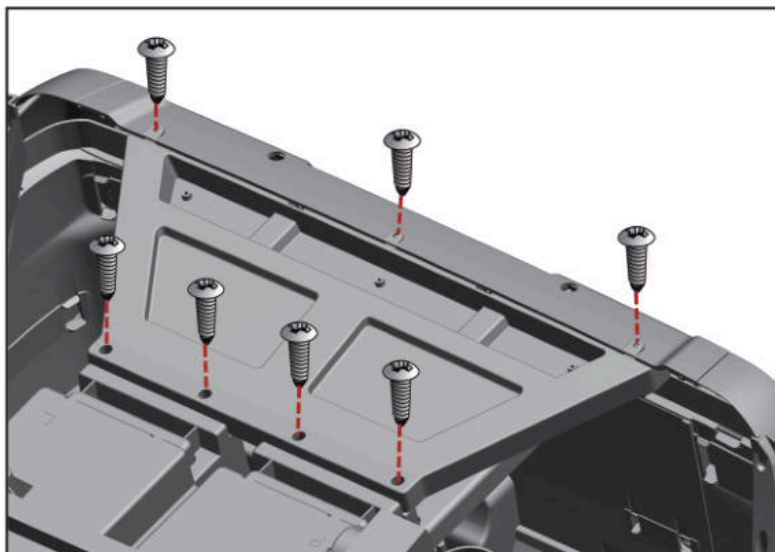


Step 4: Install rear bumper

Put the rear bumper onto the car body, and then fix it with 3 pcs of M4*12mm big flat head screws.

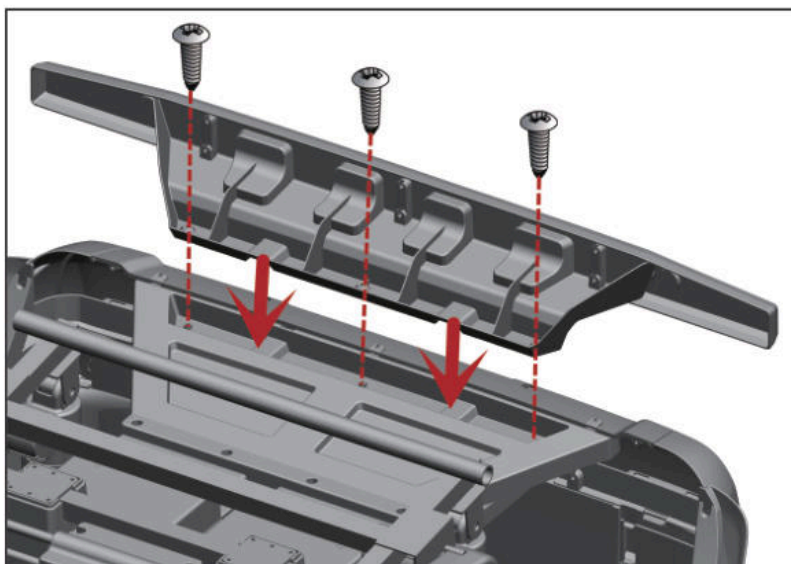

Instructions

6. Remote control frequency matching

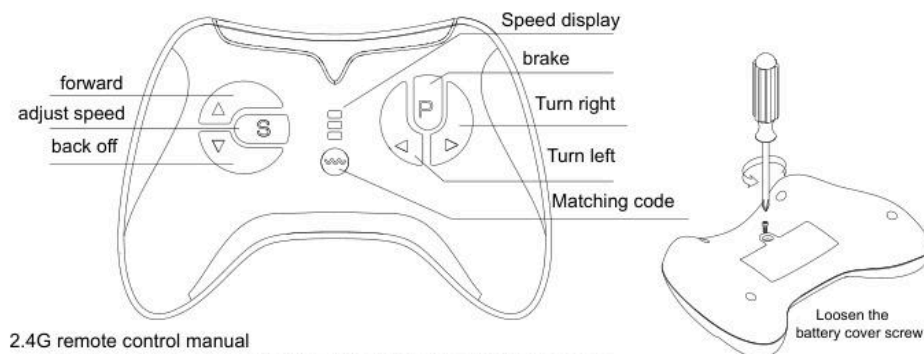


2.4G remote control manual

he first use requires code matching. This product has built-in memory, and it is unnecessary to code after replacing the battery.

1. Turn off the power of the car body, press and hold the "m" key of the remote control, the first indicator light starts to flash after 3 seconds, and then release the key
2. At this time, turn on the power switch of the car body, the first indicator light of the remote control will become normally on, and the code matching is successful
3. When the remote control is not in use, it will enter the sleep state after 10 seconds. Press any key to wake up.
4. Key function description: "forward", "backward", "left", "right", "s" speed regulation, "P" brake.

Press the "s" key to set the speed, one light is low speed, two lights are medium speed, three lights are high speed, only medium speed when reversing
Press the "P" key to enter the braking state, the indicator lights all flash, and press the "P" key again to exit the braking state



Install two AAA / 7 batteries

7. Remote control instructions

Warning! It is not suitable for children under 3 years old.


There are small parts inside and there is a risk of suffocation

- Install two AAA / 7 (1.5V) dry batteries as shown in the figure
- Use a non rechargeable battery, do not charge the battery
- Different types of batteries or old and new batteries cannot be mixed
- Take out the battery from the product in time when the battery runs out
- The positive and negative terminals of the power supply shall not be short circuited
- The package of this product contains important information, please keep it

Warning! The remote control should be used by a guardian.
There are small parts inside and there is a risk of suffocation.
Please keep away from children.


Instructions

4: Introduction for Dashboard

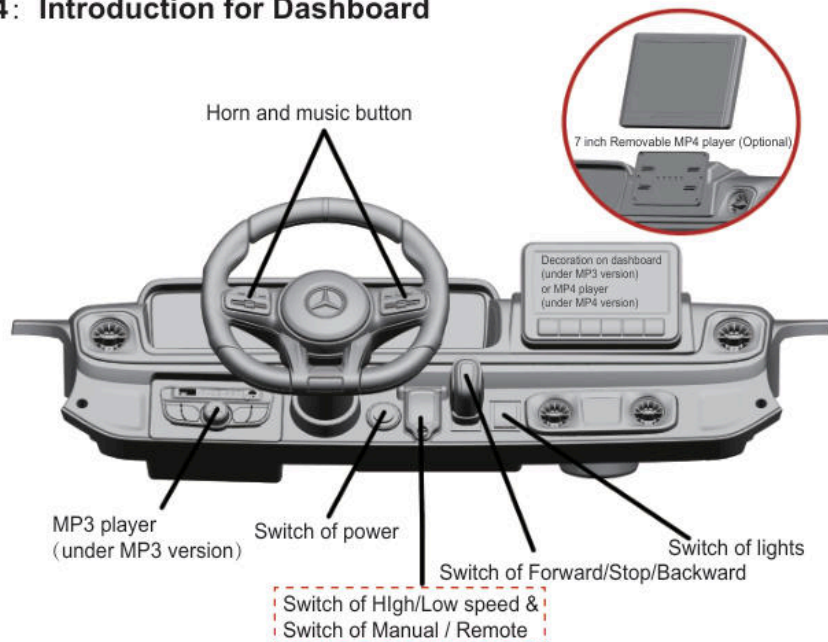

Description for the switch of Manual / Remote:
 Under the Manual: the car only can drive by the child;
 Under the Remote: the car only can drive by the remote control;


5. Introduction for Music Board

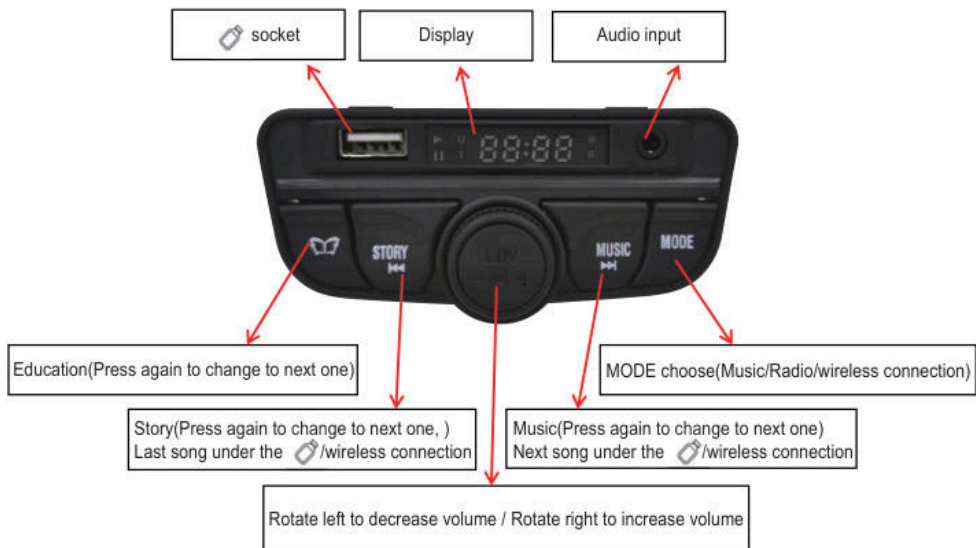

Installation steps


Step 5: Install rear driving motors

A: Install driving motors both left and right onto the car.
 B: Under mute motors version: secure one piece of mute motor to the rear axle with "1PC of fixed tabling of mute motor", "2 PCS of M5*35mm screw" and "2 PCS of M5 nut", the another mute motor operates in the same way.

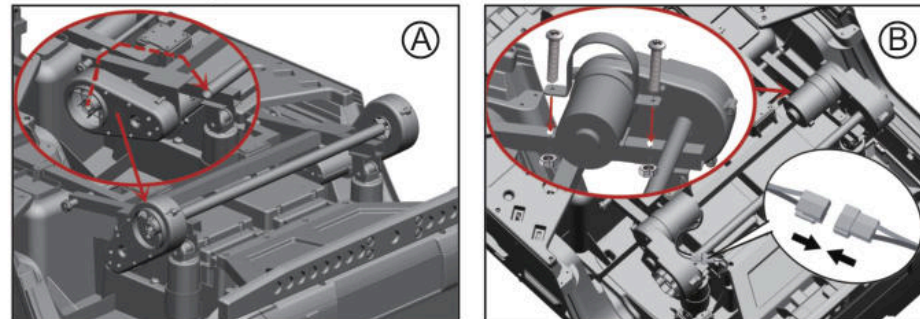


Step 6: Install rear axle

Insert rear axle into the holes of motors and onto the car body. Length of rear axle: 810mm.

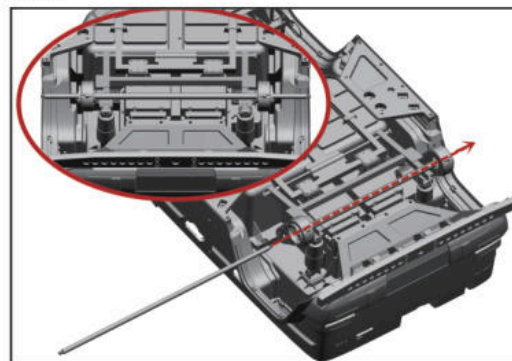

Step 7: Install decoration parts of exhaust pipe


Install decoration parts of exhaust pipe onto car body, both left and right sides.

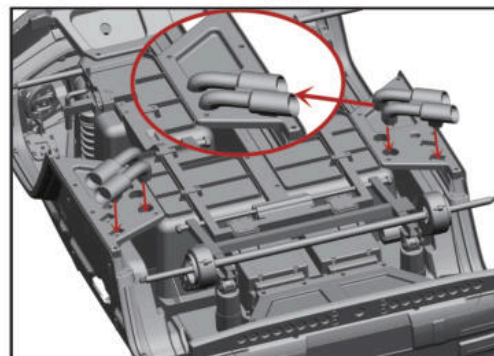

Installation steps

Step 8: Install rear wheels


Install spare parts onto rear axle following the sequences: Rear wheels - M12 gasket - M10 nut - Wheel cover.

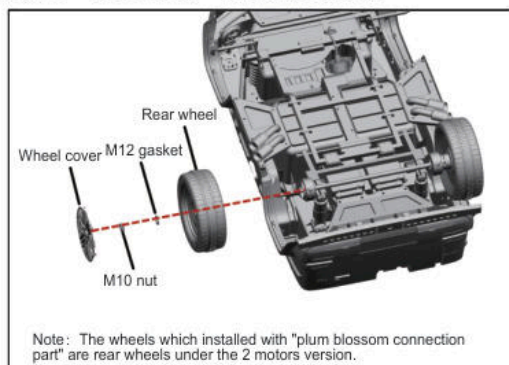

Step 9: Install front wheels

A: Under 2 motors version: install spare parts onto front axle following the sequences: M16 gasket - Front wheels - M12 gasket - M10 nut - Wheel cover.


B: Under 4 motors version: install spare parts onto front axle following the sequences: Front driving motors - Wheels - M12 gasket - M10 nut - Wheel cover.

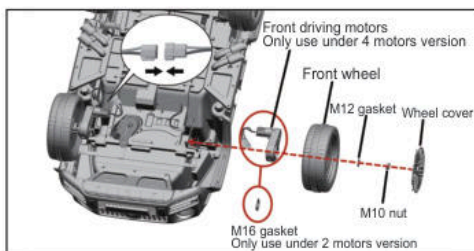

Step 10: Install steering wheel

A: Connect the steering wheel properly with the lines on dashboard.


B: Insert the steering wheel into the quick detach part and fix it.

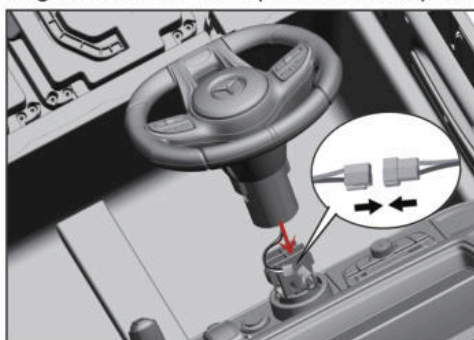

Installation steps


Step 19: Install rearview mirrors

Stuck the rearview mirrors(left and right) into the sides of the car according to the figure below.

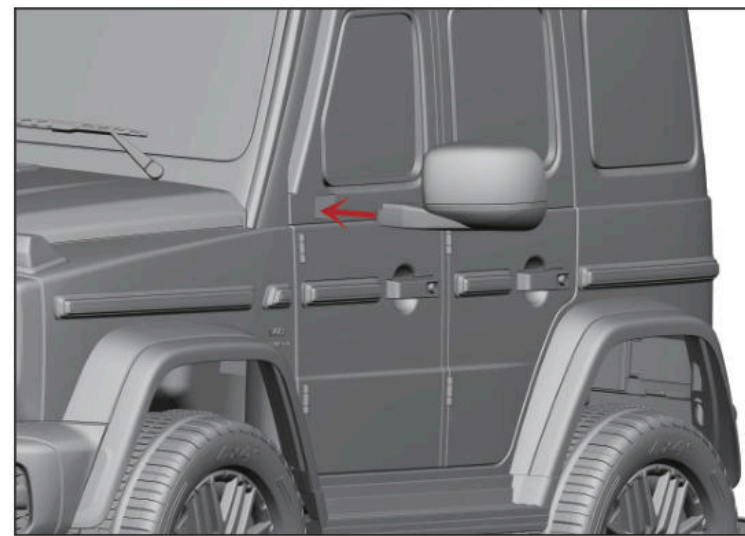

How to replace the spare tire :

If you want to replace the spare tire, please refer to the figure below to remove and install it in sequence.

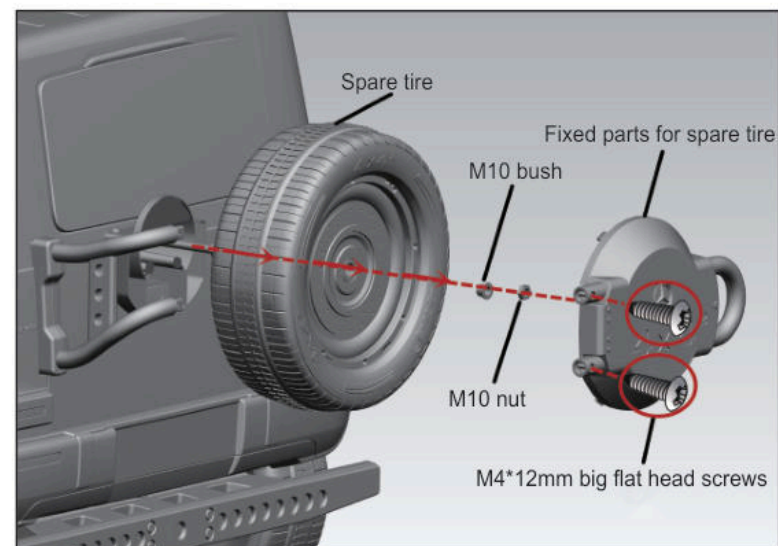

Installation steps


Step 17: Install hood carriage

Put the hood carriage onto the car body, and then fix it with 4 pcs of M4*12mm big flat head screws.



Step 18: Install hood


Install the hood according to the figure below.

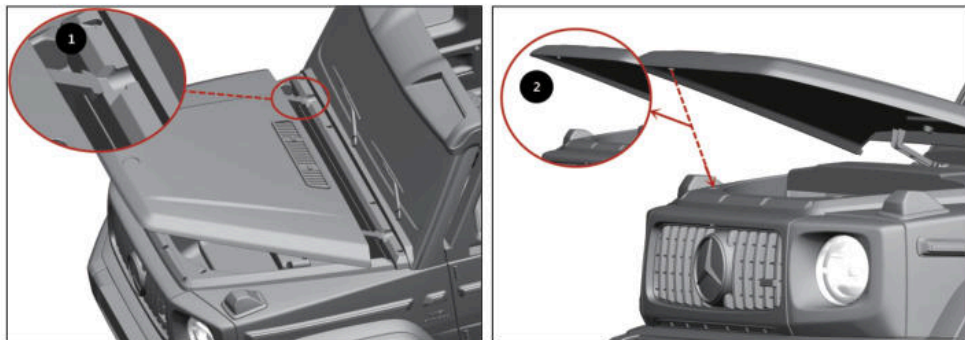

Installation steps


Step 11: Connect the power

Connect power cables with red plug in part.

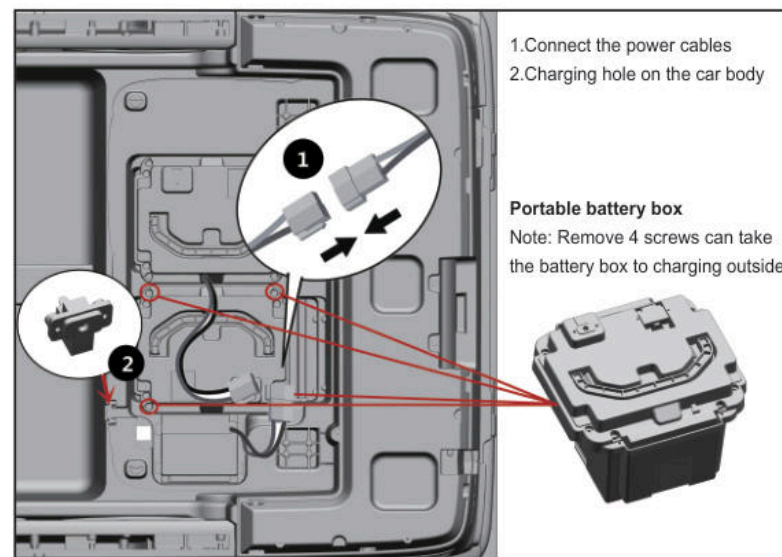

Step 12: Install spare tire


Put the spare tire onto the car body, and then fix it with 3 pcs of M4*12mm big flat head screws.

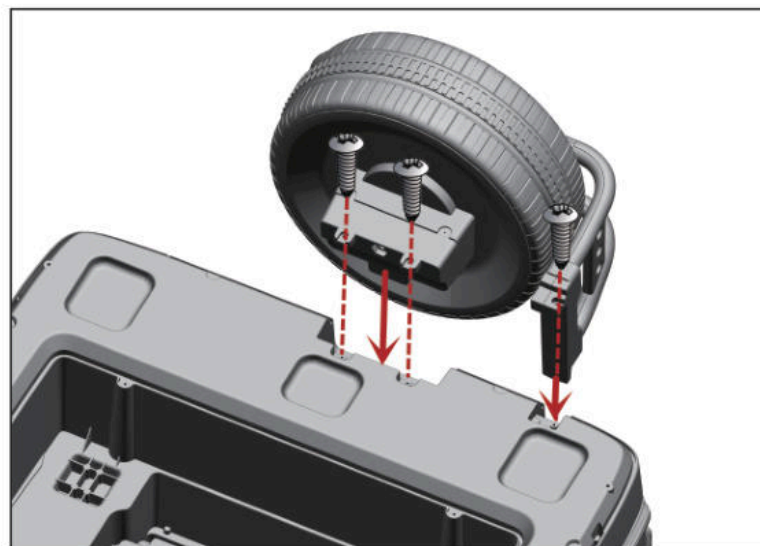

Installation steps

Step 13: Install rear upper part


Put the rear upper part onto the car body, and then fix it with 4 pcs of M4*12mm big flat head screws.

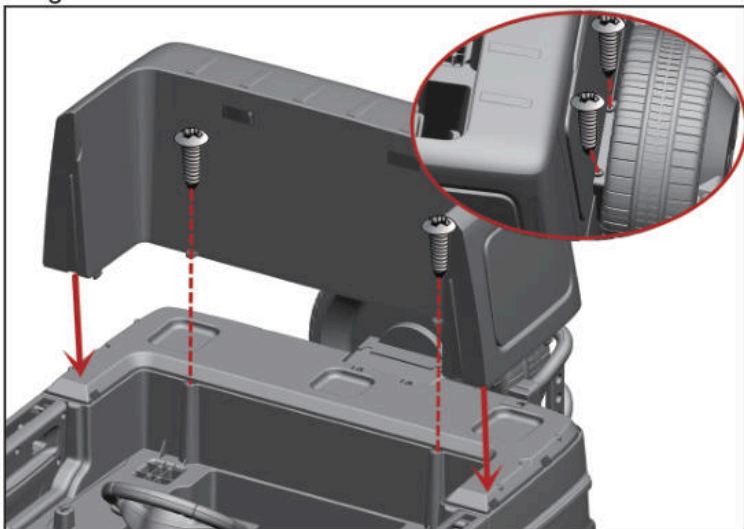

Step 14: Install seat

A. Install backrest and baseplate of seat, and then fix them with 4 pcs of M4*12mm big flat head screws.

B. Put the seat into the car and insert the seat into the slot as shown in the picture B, and then fix the seat by locking the lock catch.

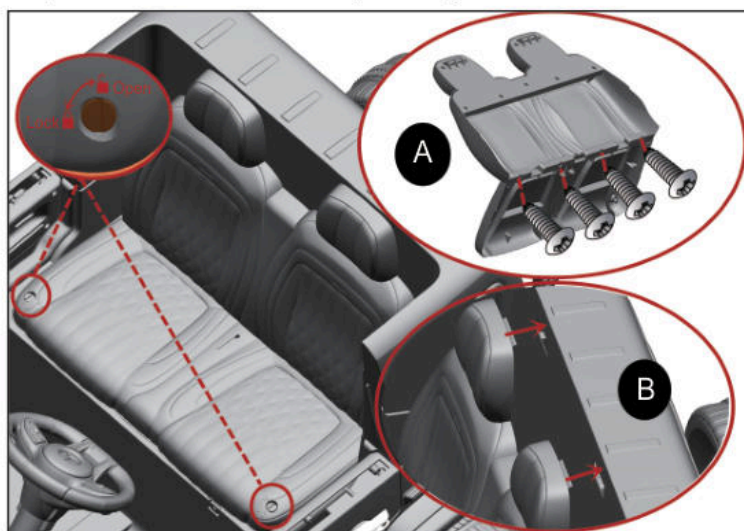


Installation steps

Step 15: Install windows

A. Insert the window into the door, and then fix them with 6 pcs of M4*16mm big flat head screws.

B. Paste decoration sticker onto the door.

Note: Operate on both sides like this.

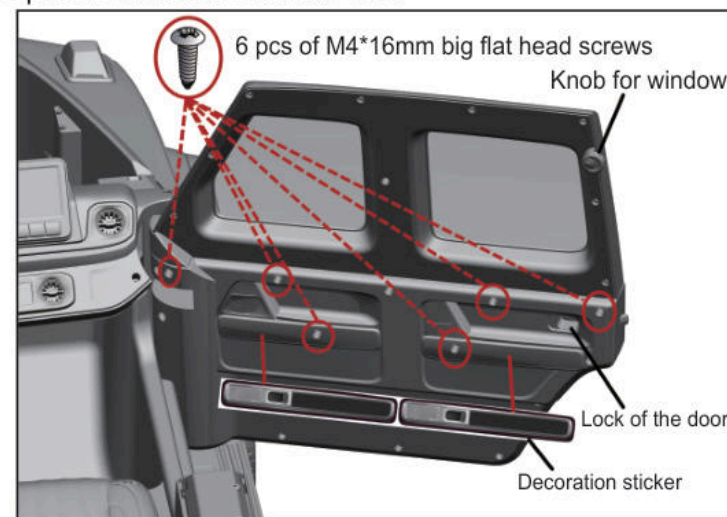

Step 16: Install window shield

A. Connect lights plug in parts of front window shield and car body.

B. Put the window shield onto the car body, and then fix it with 4 pcs of M4*12mm big flat head screws.

