

SPECIFICATION SHEET

BPL-200

Fixture Specifications:

Housing: PVC Plastic with
Stainless steel lamp holder

Finish: Available in **BLK-Black**

Lamp: 12V, PAR36 halogen bulb 25W standard, 75W Max.
LED lamps available in 3.6W, with 2700K white color
temperature


• Well Light

• Plastic

Wiring: Fixture is prewired with a 3ft 18-2 direct
burial cord. Wire nuts sold separately

Electrical Notes: A 12V transformer is required.
Voltage range for 12V halogen lamps are 11V-12.5V
Voltage range for LED lamps are 8V-21V.
Proper grease/lubricant is suggested on
threaded parts during installation process.

Warranty: Limited five (5) year warranty on fixture housing and
and stem against manufacture's defects.

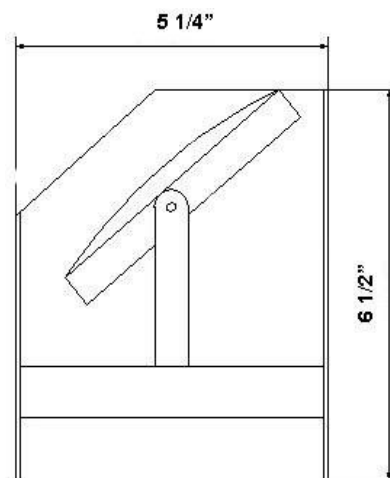

AVAILABLE LED LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
LED-PAR36	3.6	30°	500	2700K	50000	25 Watt

AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
PAR36 25W	25	30°		2700K	3000
PAR36 36W	36	30°		2700K	3000
PAR36 50W	50	30°		2700K	3000

