










INSTRUCTION MANUAL



RETAIN FOR FUTURE REFERENCE




- 1. The pet trailer can be used with most bicycles.**
- 2. The trailer is designed for pets, and not intended for children.**
- 3. You should follow the applicable national legal requirements during use, e.g. lighting and reflectors.**
- 4. Regularly check all important components such as: drawbar, connecting device, frame, tyres and wheels etc. for safe condition; regular verification whether bolted assemblies are well tightened.**
- 5. Be careful when you ride, especially when going up and down hills and turning corners, braking should be used, and enough space should be kept.**
- 6. Pay attention that the trailer may influence the bicycle's braking distance.**
- 7. Cycle trailers pulled by an EPAC can be restricted by law.**

PARTS LIST

A  1pc	B  1pc	C  1pc
D  1pc	E  1pc	F  1pc
G  M6x40 4pcs	H  2pcs	I  1pc

ASSEMBLY

1



- 1. Unfold the folded cloth frame of the trailer**
- 2. Install the Crossbar into the upper rear side of the Cabin Frame**
- 3. Fix the 2 ends of the support bar with the Screw**



Warning!

Tight all the screws to 60% first then tight to 100%.

2

1. Fix the 2 sides of the push handle to the mounting hole sat the rear of the Cabin Frame.




3

1. Press up on the spring buckle on the below Crossbar of the Cabin Frame.

Notice!!!

***Must need to adjust the spring buckle on the crossbar to the correct direction before pressing it up. Otherwise the wheels will not be locked normally.**

*** The correct direction of the spring buck please refer to the circled part of the picture.**

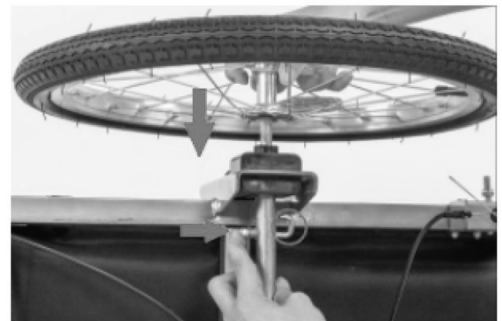

2. Insert the wheel with axle into the mounting hole on the below crossbar 2 side of the Cabin Frame. Finally release the spring buckle to fix the wheel. Install the 2 wheels into the 2 sides of the frame in the same way.

Notice!!!!

***After releasing the spring buckle, pay attention to check whether the wheel is fixed by the spring buckle to avoid accidental loosening of the wheel during driving.**





Warning!

Tight all the screws to 60% first then tight to 100%.

4




1. Insert the rod of Y-shaped bracket with Front wheel underside plastic cover into the front mounting hole of fixed on the Cabin frame.



2. Install the Front wheel upper-side plastic cover and the screw into the front mounting hole, tighten the screw to fix the plastic cover and the front wheel.

5

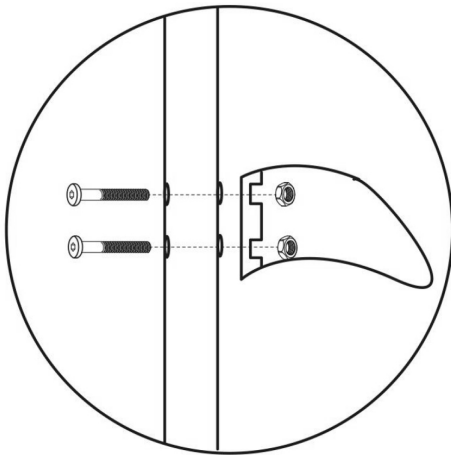



Warning!

Tight all the screws to 60% first then tight to 100%.

6

1.Insert the flag into the pocket.



7

2-in-1 Bike Trailer Effect Display



1.Pet Stroller
Fix the connect rod to the bottom
of the Cabin.



2.Pet Trailer
Attach the connect rod to bike with
universal hitch.



Warning!

Tight all the screws to 60% first then tight to 100%.

8

INSTALLATION TIPS



1.The head connector part of the long bent rod with the buckles trap is designed with a fixed pin for easy connection to the bicycle.



2.You can fix attach the head connector part to the rear end of the bike, with a pin for quick attachment or detachment of the trailer.