

Remove Accessory Steps Guide

Step 1: Open the package and get the fireplace unit, as shown below.



Step 2: The tempered glass is secured directly in front of the fireplace. Carefully get the tempered glass.




Step 3: Use a Phillips screwdriver to remove the 4 screws securing the metal pressure strip that for removing the glass pressure strip and the 4 metal support bars, as shown in the figure below.



Step 4: Remove the front tempered glass pressure strip. (This is the lock mechanism for the tempered glass panel. Please store it carefully.)



Step 5: Remove the 4 metal support bars. (These bars are only used to secure the accessory boxes and support the front glass which can be discarded after removal.)

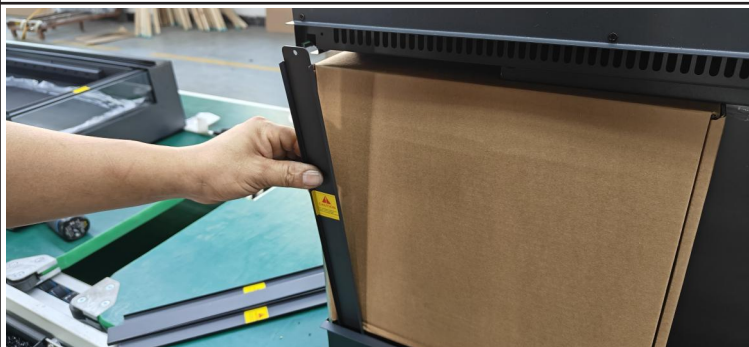

Step 6: Get the accessory boxes on left side of the fireplace by gently pulling them forward in a straight line.



Step 7: Remove the accessory trays. Take out the 2 trays located on the left side bottom. (They are only used to secure the accessory box and can be discarded after removal.)



Step 8: Remove the accessory trays. Take out the 2 trays located on the left side top. (They are only used to secure the accessory box and can be discarded after removal.)

