


POSITANO FLAME TOWER COLLECTION

# THE CAPRI

OUTDOOR FLAME TOWER HEATER

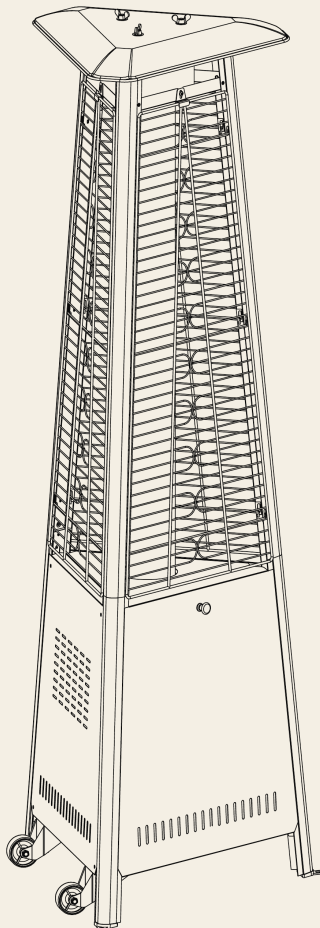

72" H × 22" W

*The compact tower of the Positano collection — a six-foot column of flame sized for terraces, balconies and closer, more personal settings.*

TRUBTU™ COMFORT ZONE ON A 50°F EVENING

70°  
AT 3 FT

64°  
AT 5 FT

60°  
AT 8 FT

8 ft heat radius · approx. 201 sq ft of warmth. Measured air temperature at distance — our own standard, not a theoretical output figure.

FUEL

Liquid propane or natural gas  
· bio-LP ready, no conversion needed

CONTROL

Electronic ignition with  
manual Clima-Comfort at the control valve

RUN TIME

LP: up to approx. 12 hours per  
concealed 20 lb cylinder

ARRIVES

Assembled or flat-pack · 72" ×  
22" · 60 lb

## FRAME

304-grade stainless panels  
on marine-grade 6061-T6  
aluminum, with a 430-  
grade stainless emitter.

## GLASS

A borosilicate column  
carries the flame the full  
height of the tower,  
removable for cleaning.

## WARRANTY

Lifetime limited on frame  
and structure. Five years  
on parts and finish.

## LINEAGE

Built on the original  
flame-tower design  
brought from Italy.  
Specified worldwide since  
2001.

# THE CAPRI


POSITANO FLAME TOWER COLLECTION

TECHNICAL DATA

## SPECIFICATIONS

|                 |                                                                                                                          |
|-----------------|--------------------------------------------------------------------------------------------------------------------------|
| MODEL           | The Capri · LHI-CAPRI                                                                                                    |
| TRUBTU™ (50°F)  | 70° at 3 ft · 64° at 5 ft · 60° at 8 ft                                                                                  |
| HEAT RADIUS     | 8 ft · approx. 201 sq ft                                                                                                 |
| CERTIFIED INPUT | 42,000 BTU/hr                                                                                                            |
| FUEL            | Liquid propane (20 lb cylinder in the base) or natural gas, supplied with a 10 ft quick-connect hose · bio-LP compatible |
| RUN TIME        | LP: up to approx. 12 hours per 20 lb cylinder · NG: continuous                                                           |
| CONTROL         | Electronic ignition · manual Clima-Comfort at the control valve                                                          |
| BATTERIES       | AA (igniter)                                                                                                             |
| SIZE            | 72" H × 22" W · 60 lb · two wheels                                                                                       |
| MATERIALS       | 430 stainless emitter · 304 stainless panels · marine-grade 6061-T6 aluminum · borosilicate glass                        |
| CERTIFICATION   | CSA certified to ANSI Z83.26 / CSA 2.37, file 220535 · 500-hour ASTM B117 salt-spray tested                              |
| SAFETY          | Tilt-switch auto shutoff · thermocouple flame-failure protection                                                         |
| GAS PRESSURE    | NG 4–7 in WC · LP 11 in WC manifold · NG supply line ¾" ID minimum                                                       |
| APPLICATION     | Outdoor use only · residential and commercial                                                                            |
| SHIPS           | Fully assembled, or flat-pack (about 90 minutes to assemble)                                                             |
| CARTON          | Flat-pack 55.8 × 29.5 × 9.1 in · 67.3 lb gross                                                                           |

## CLEARANCES

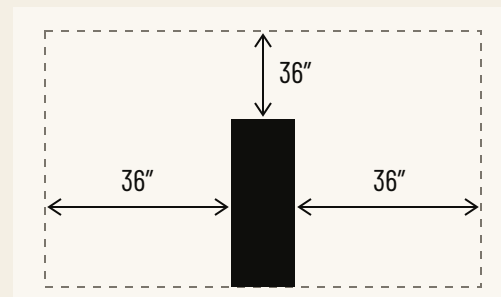

Minimum to combustibles. Under cover, no more than three side walls, with at least 30% of the perimeter permanently open.

## WARRANTY

|                     |                 |
|---------------------|-----------------|
| Frame and structure | <b>Lifetime</b> |
| Parts               | <b>5 years</b>  |
| Finish              | <b>5 years</b>  |
| Burner and glass    | <b>1 year</b>   |
| Hose and regulator  | <b>1 year</b>   |

Limited, parts only. Residential and commercial on identical terms.

## FINISHES

### STOCKING

-  Stainless Steel
-  Heritage Bronze
-  Hammered Black

**Amalfi Studio** · eight RAL colors

**Amalfi Architecture** · seven Corsa mattes

Made to order. Colors shown are indicative.



940 W. Washington Blvd., Los Angeles, CA 90015  
310-559-1700 · customerservice@lavaheat.com

LAVAHEAT.COM

SPECIFICATIONS SUBJECT TO CHANGE

LHI-CAPRI · REV. OCT 2026 · 2 / 2