










# Installation

Hardware List		Hardware List	
 Table top	1	 Table pillar	1
 Table bottom board	1	 Desktop connection board	1
 8x25mm screw	8	 8x30mm screw	4
 Washer	4	 Hexagonal screw tap	1

1

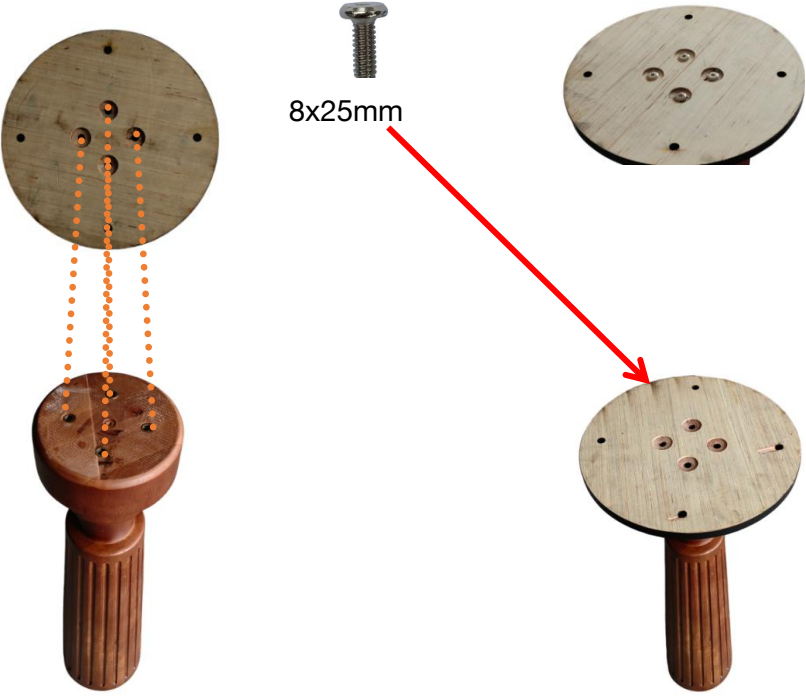

8x25mm

The desktop connection board is tightened with 8\*25


2



8x25mm screw

Then tighten the bottom board of the table with 8\*25 screws, and the table base is installed.

3

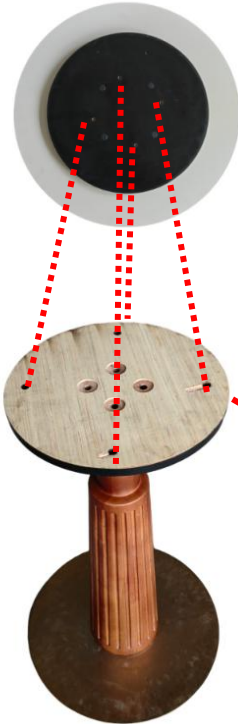

8x30mm










Put the table top on the table leg, make sure the reserved screw holes of the table top and the frame are corresponding, tighten 8x30mm screws to finish the installation.


8\*25 screws are needed to install the glass desktop, and screws should be matched according to the desktop.




# Installation

Hardware List		Hardware List	
 Seat	1	 Frame	1
 8x35mm screws and Washers	4	 8x60mm screws and Washers	6
 6x70mm screws and Washers	4	 Hexagonal screw tap	1
 Foot pads and 4x10mm Self-tapping screws	4		


1

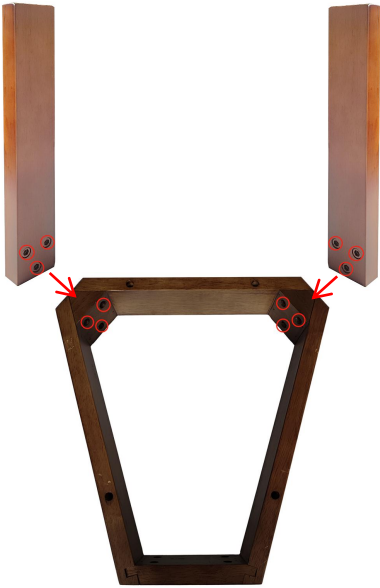


Note that all screw holes can be aligned before tightening the screws.

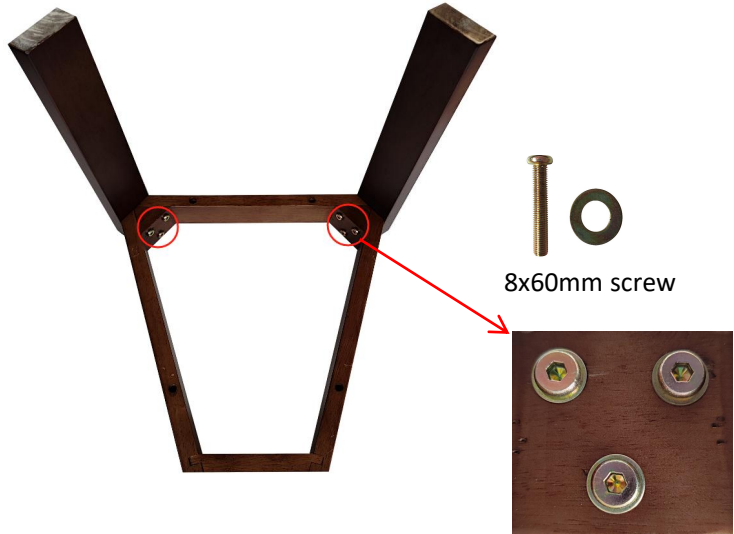

2

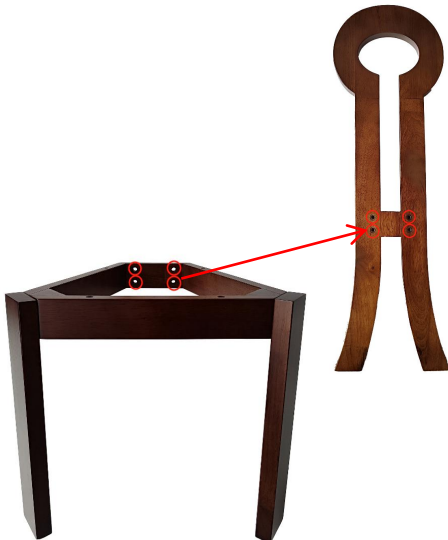

3

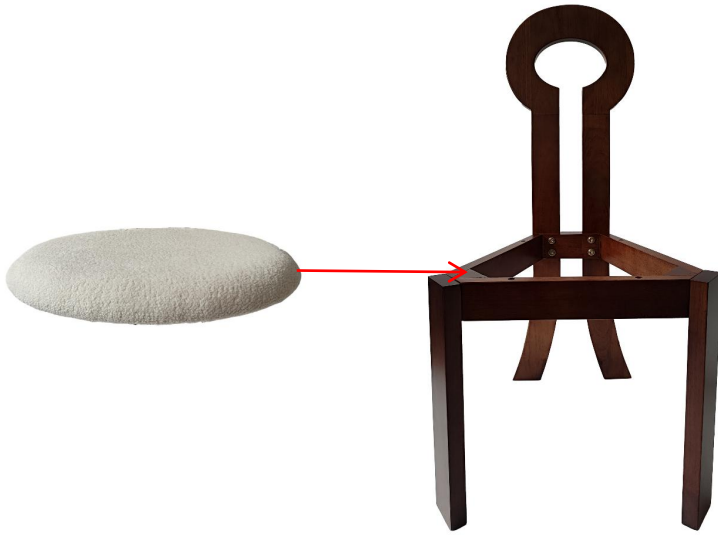

4

