

WAC LIGHTING

Pop-In 4" Square 5CCT Remote Remodel Downlight

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R4DSDR2	F 45°	9CS 2700K/3000K/3500K/4000K/5000K - 90	935	1096	BK Black WT White

Example: **R4DSDR2-F9CS-BK**

DESCRIPTION

Minimum profile downlight with remote driver for easy remodel or new construction installation.

FEATURES


- 5-CCT Switchable between 2700K and 5000K
- Remote driver box allows easy installation into shallow plenums
- Sold as remodel, but new construction frame available
- Driver included
- 5 year warranty

SPECIFICATIONS


Construction	Die-cast Aluminum
Power:	12W
Input:	120-277 VAC, 50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED
Lens:	Frosted TIR lens
Rated Life:	50,000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Cut Out:	4"
Finish:	Electrostatically Powder Coated: White, Black
Ceiling Thickness:	1/2" - 1 1/2"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Title 24 JA8 Compliant, Airtight, IC



FINISHES:



LINE DRAWING

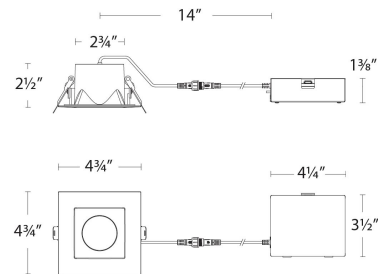


WAC LIGHTING

Pop-In 4" Square 5CCT Remote Remodel Downlight

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

ACCESSORIES

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	R4DRDN-FRAME	Pop-In 4"	