


# Assembly Instruction Sheet for Model HL403396

## Package Contents

Part	Description	Quantity
A	Fixture Arm	2 pcs.
B	Backplate	1 pc.
C	Glass Shade	2 pcs.
D	Mounting Bracket	1 pc.

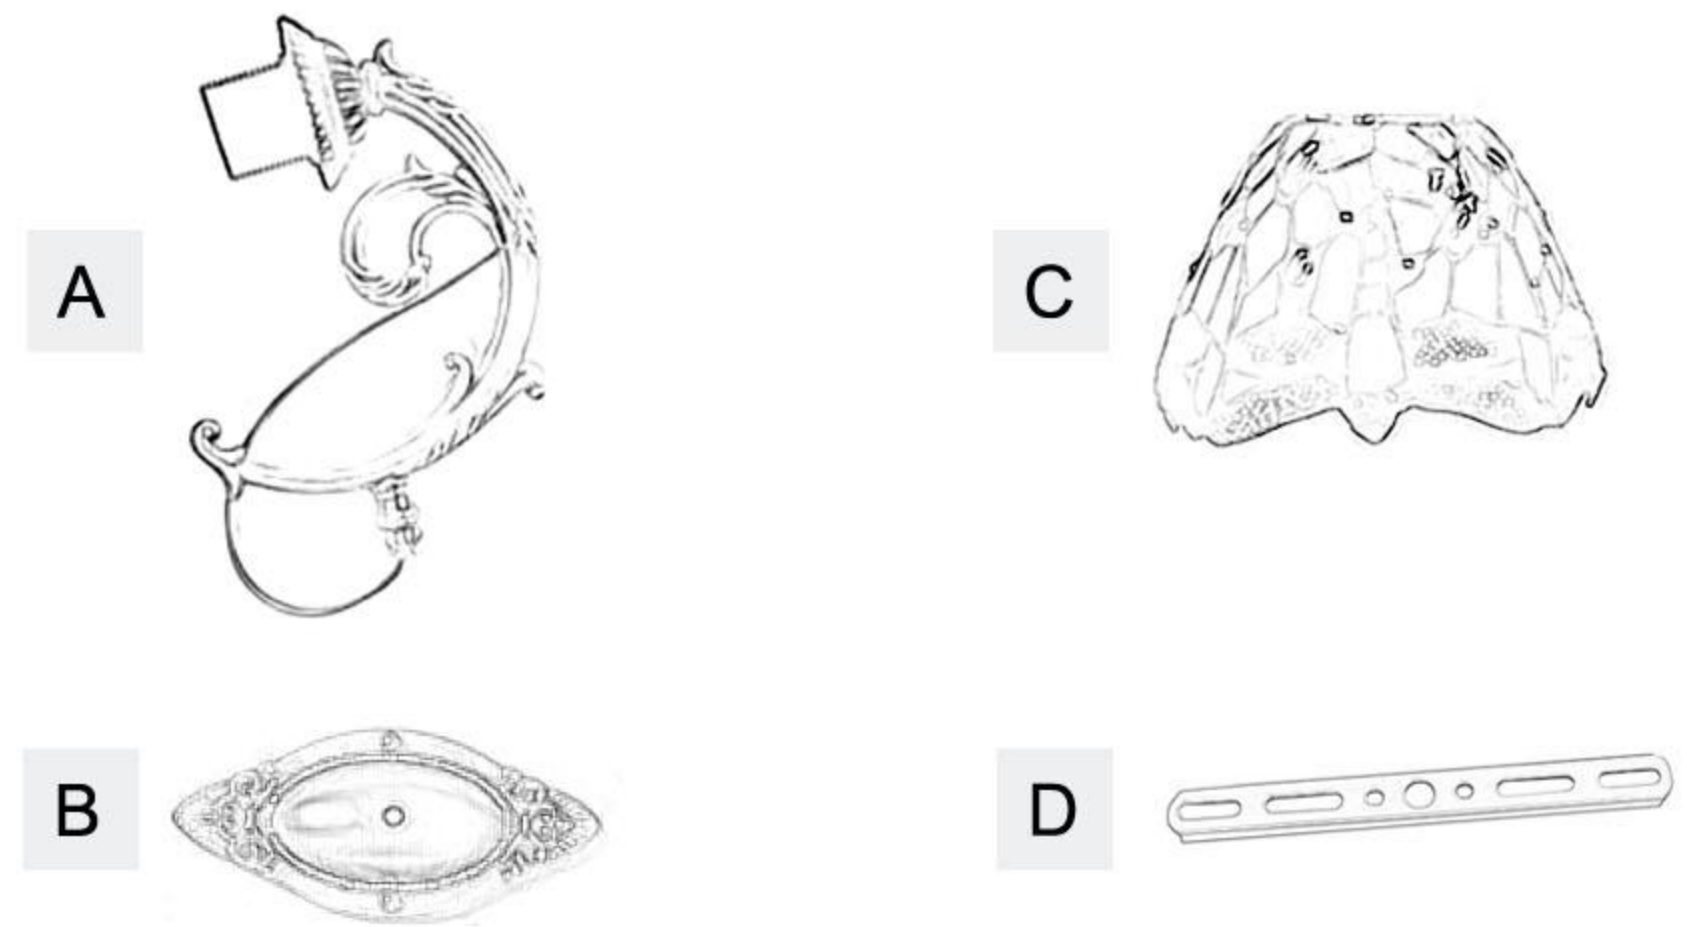

### STEP 1

Fix the Fixture Arm(A) to the Backplate(B) with hexagon nut.

### STEP 2

Remove the socket ring from lamp socket of Fixture Arm(A).  
Place the Glass Shade(C) to the lamp socket of Fixture Arm(A).  
Screw the socket ring back to socket to stabilize the Glass Shade(C).  
Repeat the above step to fix the other Glass Shade(C).

### STEP 3

Remove the Mounting Bracket(D) from Backplate(B).  
Mark the drilling position on wall with the help of the Mounting Bracket(D).  
Drill holes on the marks and stick the expansion anchors into the holes.  
Fix the Mounting Bracket(D) to the expansion anchors with self-tapping screws.

### STEP 4

Connect wire color Black/Red of Fixture Arm(A) as one strand of wire.  
Connect wire color White/Blue of Fixture Arm(A) as the other strand.

### STEP 5

Hold the fixture close to wall.  
Connect live line to wire color Black/Red from the Fixture Arm(A).  
Connect neutral line to wire color White/Blue from the Fixture Arm(A).

### STEP 6

Attach the Backplate(B) to the Mounting Bracket(D).

### STEP 7

Insert your bulb to the bulb base.

Your fixture is now assembled and ready to use.