

TOTO®

CST794EF Eco Nexus® Two Piece Toilet, 1.28 GPF




CST794EF - Eco Nexus® Toilet
SS204 - SoftClose® Oval Seat



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet®.



Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Unique sculpted design, skirted two piece toilet
- Universal Height 16-1/8" rim height
- Skirted styling with concealed trapway for easy cleaning
- E-Max® Technology
- Powerful, quiet flush every time
- Large water surface
- Designer Suite:
Matching Nexus® pedestal and vessel lavatories

Decorative, ADA compliant, high profile two piece toilet. Low consumption (1.28 Gpf/4.8 Lpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST794EF**

Elongated, 12" rough-in, less seat

□ **CT794EF**

Elongated bowl only, 12" rough-in.

□ **ST794E**

Eco Nexus® tank and cover only. Complete with tank trim and coupling components.

□ **SS204**

SoftClose® Oval: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

Colors:

Standard #01 Cotton

Trip Lever:

Standard #CP Chrome Plated

Optional See price book for additional finishes



CST794EF

Eco Nexus® Two Piece Toilet, 1.28 GPF

■ PERFORMANCE

The TOTO® E-Max® low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trap-way.

■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf
 Flush System: Gravity Feed (E-Max® Technology)
 Min. Water Pressure: 8 psi
 Water Surface: 10-1/4" x 8-1/4"
 Trap Diameter: 2-1/16"
 Rough-in: 12" rough-in
 Trapseal: 2-1/4"
 Warranty: Five Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **CT794EF** 81.5 lbs.
ST794E 33.5 lbs.

Shipping Dimensions: **CT794EF** 29-3/4"L x 16-1/2"W x 24-3/4"H
ST794E 20-3/8"L x 8-3/8"W x 19-5/8"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 and EPA WaterSense requirements.


Listing and approval: IAPMO/c-UPC, CSA, City of Los Angeles, State of MA



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor.

Recommended seat: SS204

These dimensions and specifications are subject to change without notice.

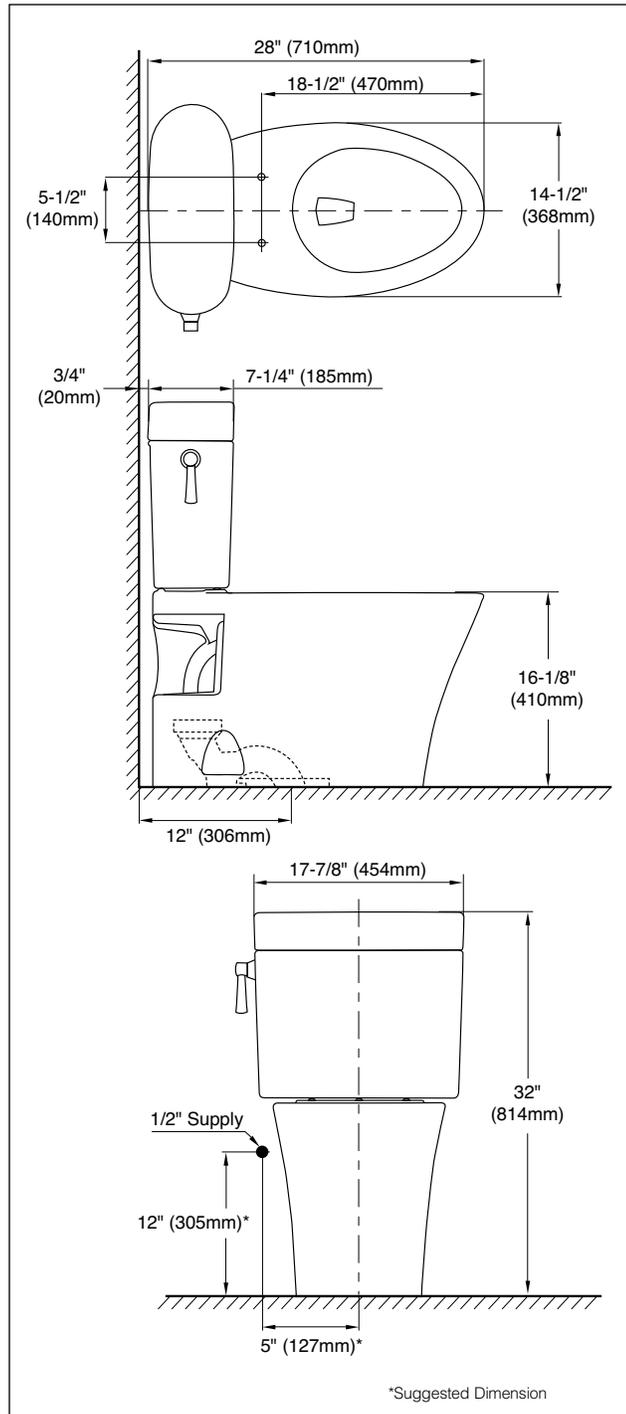

CST794EF - Eco Nexus® Toilet