

WARNING

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN ****
- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
 - * Inspect item carefully before attempting to install.
 - * If there is any damages or obvious defects, do not install.
 - * Item may not be returned once it has been installed.










CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.


NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
 - * This item should be assembled on a soft surface to prevent scratching the finish during assembly
 - * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced
If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List

| PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY |
|-------|----------------|---|----------|-------|-------------|---|----------|
| A | wire connector |  | 3X | F | glass shade |  | 2X |
| B | mounting plate |  | 1X | G | lamp cup |  | 2X |
| C | mounting screw |  | 2X | H | socket ring |  | 2X |
| D | lamp body |  | 1X | I | Bulb |  | 2X |
| E | Nut |  | 2X | | | | |


Product Dimensions: 17.5"L X 7"D X 6"H

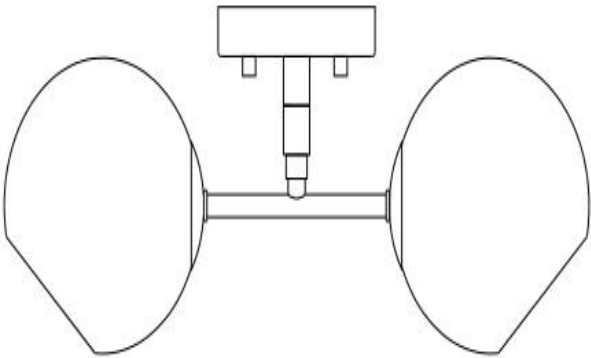

PREPARATION


- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.

NOTE: PLEASE USE TYPE"B" BULB MAX 25-WATT OR CFL BULB MAX 9-WATT OR LED BULB MAX 5-WATT, THERE ARE 2PCS LED 4-WATT BULB IN THE BOX

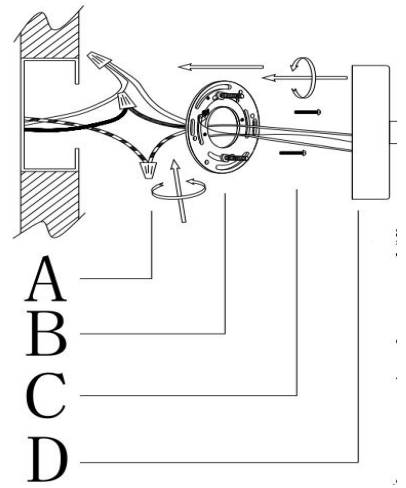

The diagram shows a cross-section of a wall with an outlet box. A mounting plate (B) is being attached to the outlet box with screws (C). Wires (A) are shown entering the outlet box. A ground wire (D) is shown being connected to the mounting plate.


Step 1: Secure mounting plate (B) to outlet box with mounting screws (C) .

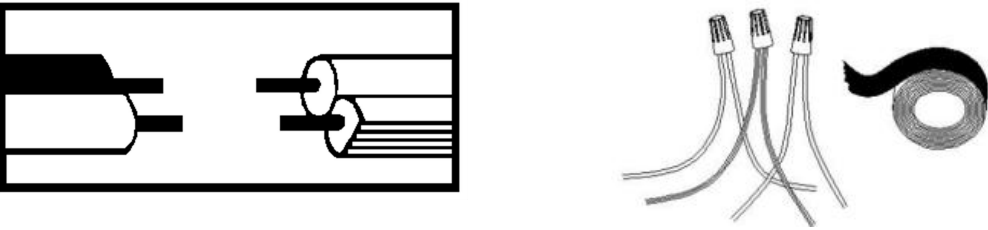

The diagram shows two types of wire connections. On the left, a ribbed neutral wire is connected to a smooth hot wire using a wire nut. On the right, a ground wire is wrapped around a green ground screw (B) on a mounting bracket. Below the diagrams, there is a list of parts: A (Mounting plate), B (Ground screw), C (Wire nut), D (Ground wire), E (Lamp body), F (Glass shade), G (Lamp cup), H (Socket ring), I (Bulb).


Step 2: Wire connection
Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.
Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

Grounding Instructions:
Wrap ground wire from outlet box around green ground screw(B) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

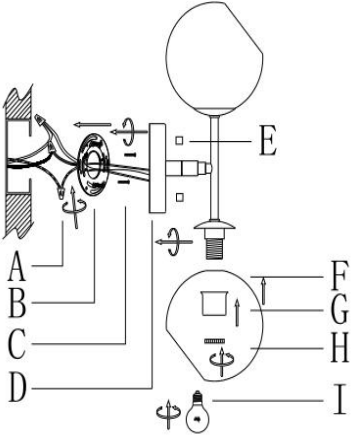

The diagram shows the lamp body (D) being attached to the mounting plate (B) with a retaining nut (E). The bulb (I) is shown being inserted into the socket (H).

Step 3: Attach the lamp body (D) to the Mounting plate (B) and secure with retaining Nut(E)

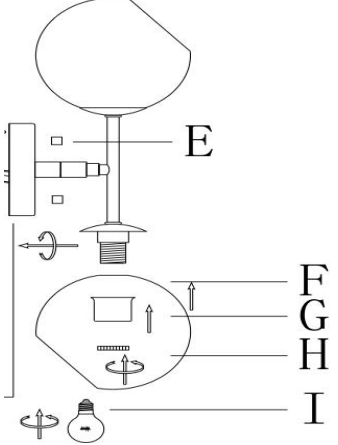

The diagram shows the final assembly. The glass shade (F) is placed on the socket (H), the lamp cup (G) is locked on the socket, and the bulb (I) is plugged into the socket.

Step 4: Place the glass shade (F) on the socket, lock the lamp cup (G) on the socket, and tighten with the socket ring (H). Plug the bulb (I) into the socket