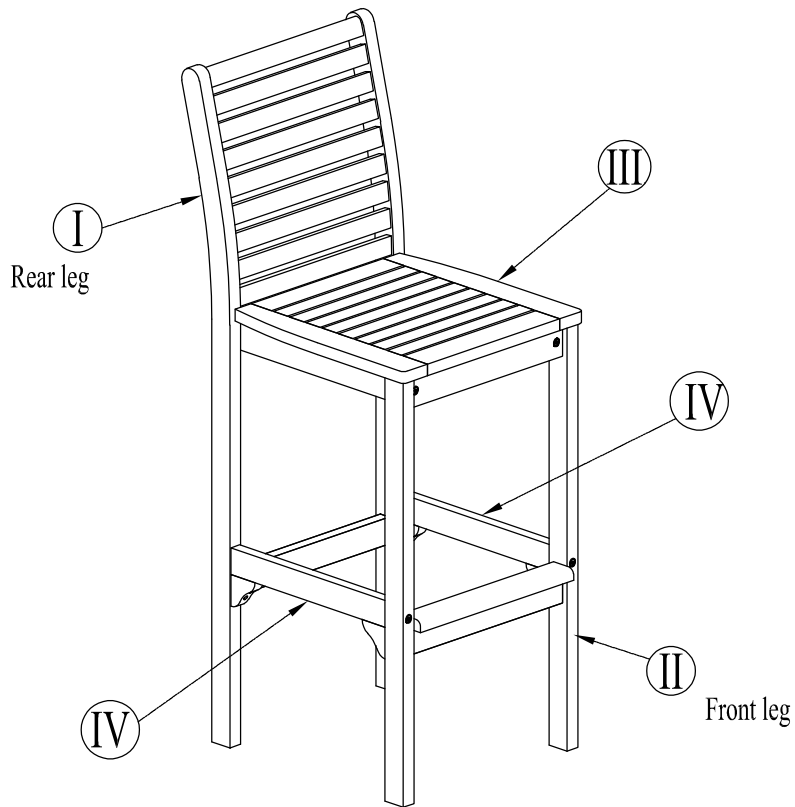



Maximum capacity : 110 kgs/242 Lbs






TIGHTEN

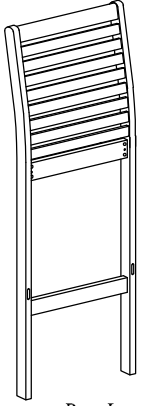
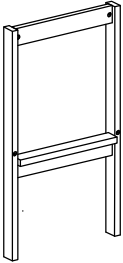




LOOSEN








NOTE: 50% TIGHTEN BEFORE FIXING ALL BOLTS & SCREWS

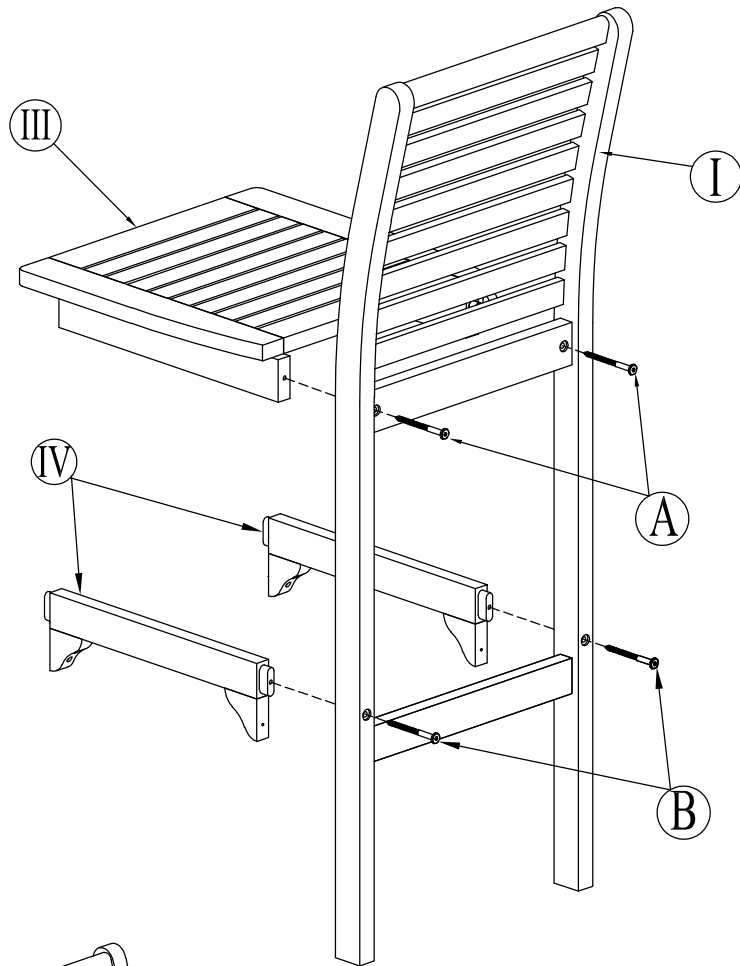
COMPONENTS LIST

<p>Ⓘ</p>  <p>Rear Leg Q'ty 1</p>	<p>Ⓜ</p>  <p>Front Leg Q'ty 1</p>	<p>Ⓜ</p>  <p>Q'ty 1</p>	<p>Ⓜ</p>  <p>Q'ty 2</p>
---	--	---	--

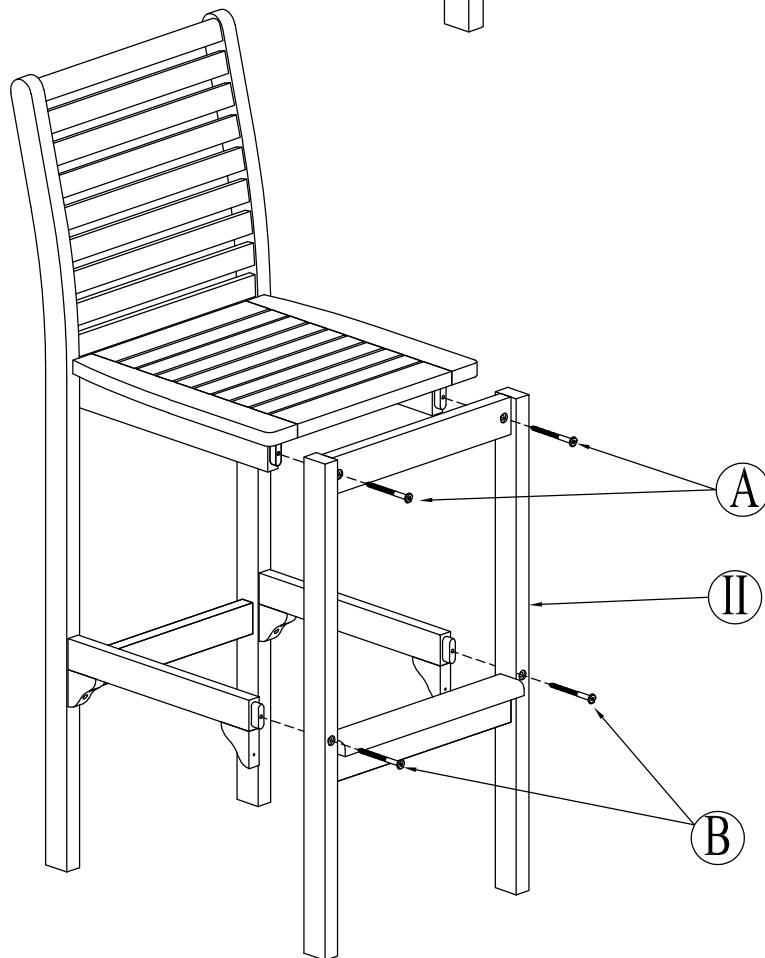
HARDWARE LIST

A		4	Screw 7 x 60	C		4	Screw 4 x 35
B		4	Screw 7 x 90	D		2	Allen Key
				E	Supporting tools Screw driver		

Step 1



Step 2



Step 3

