


Important: Always disconnect the power before installing or replacing bulb and before cleaning or other maintenance.

This light should be installed by a licensed electrician

LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
 2. Attach the universal mounting plate to the outlet box, secure with outlet box screws.
 3. Make appropriate electrical connections using wire nuts:
 - a. Connect the fixture's live wire (black) to the live outlet box wire.
 - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
 4. Attach back plate to universal mounting plate, tighten with cap nuts.
 5. Install 75W medium base bulb (not included).
 6. Attach glass to glass holder, tighten with silicone washers and thumb screws.
- NOTE: The cord the glass holder is hanging from is NOT adjustable.
7. Restore power to the fixture.

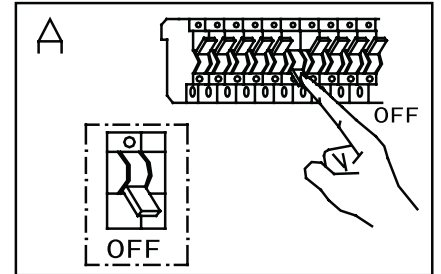

CARE INSTRUCTIONS

Dusting — Use a clean, dry cloth.
 Cleaning — To protect the finish, avoid any harsh abrasives or chemicals.

