


BATH WHIRLPOOL WITH INTEGRAL APRON

K-1357-LA/RA

FEATURES

- 60" (152.4cm) x 32" (81.3cm) x 20" (50.8cm)
- Integral apron with removable access panel
- Acrylic
- 8 Kohler jets, color matched
- 1.25 hp pump with air switch actuator
- Integral lumbar support and armrests
- Pump is supplied with a grounding-type plug-in cord
- Left or right outlet
- Integral tile flange

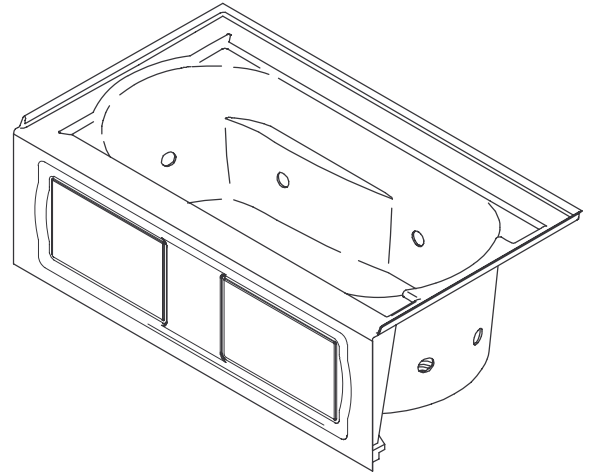

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ANSI Z124.1
- ASME/ANSI A112.19.7M
- IAPMO/UPC
- Underwriters Laboratories (UL)
- State of Massachusetts

COLORS/FINISHES

- 0 White
- Other Refer to Fixtures Price Book for additional colors

Accessories:

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Fixtures Price Book for additional colors

SPECIFIED MODEL:

| Model | Description | Colors/Finishes | |
|-----------|--|----------------------------------|-------------------------------------|
| K-1357-LA | Bath whirlpool with left outlet, integral apron | <input type="checkbox"/> 0 White | <input type="checkbox"/> Other_____ |
| K-1357-RA | Bath whirlpool with right outlet, integral apron | <input type="checkbox"/> 0 White | <input type="checkbox"/> Other_____ |

| Recommended Accessories | | | | |
|-------------------------|-------|-----------------------------|-----------------------------|-------------------------------------|
| K-7161-AF | Drain | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Other_____ |

PRODUCT SPECIFICATION:

The bath whirlpool shall be 60" (152.4cm) in length, 32" (81.3cm) in width, and 20" (50.8cm) in height. Bath whirlpool shall be made of acrylic. Bath whirlpool shall have 8 color-matched Kohler jets, 1.25 hp pump, and air actuator. Bath whirlpool shall be UL listed. Bath whirlpool pump shall be supplied with a plug-in cord. Bath whirlpool shall be Kohler Model K-1357-LA/RA-_____.

PRODUCT INFORMATION

| | | | |
|---|------------------------------|----------------------------|-------------------|
| Left outlet, integral apron | | K-1357-LA | shown |
| Right outlet, integral apron | | K-1357-RA | not shown |
| Fixture*: | basin area | top area | weight |
| Bathing well | 42" (106.7cm) x 20" (50.8cm) | 51" (129.5cm) x 24" (61cm) | 135 lbs. (61.2kg) |
| | water depth | capacity | |
| To overflow | 14" (35.6cm) | 60 gal. (227.1L) | |
| * Approximate measurements for comparison only. | | | |

| | | | | |
|---------|------|-----|----|---|
| Pump | HP | V | Hz | A |
| 1-speed | 1.25 | 120 | 60 | 7 |

REQUIRED ELECTRICAL SERVICE


| | |
|---|--------------------|
| Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI): | |
| Pump/control | 120V., 15A., 60 Hz |

INSTALLATION NOTES

Floor support under this product must provide for minimum loading of 80 lbs./square foot (390 Kg./square meter).

Fixture conforms to ANSI Standard Z124.1. All dimensions are nominal.

K-1357-LA/RA

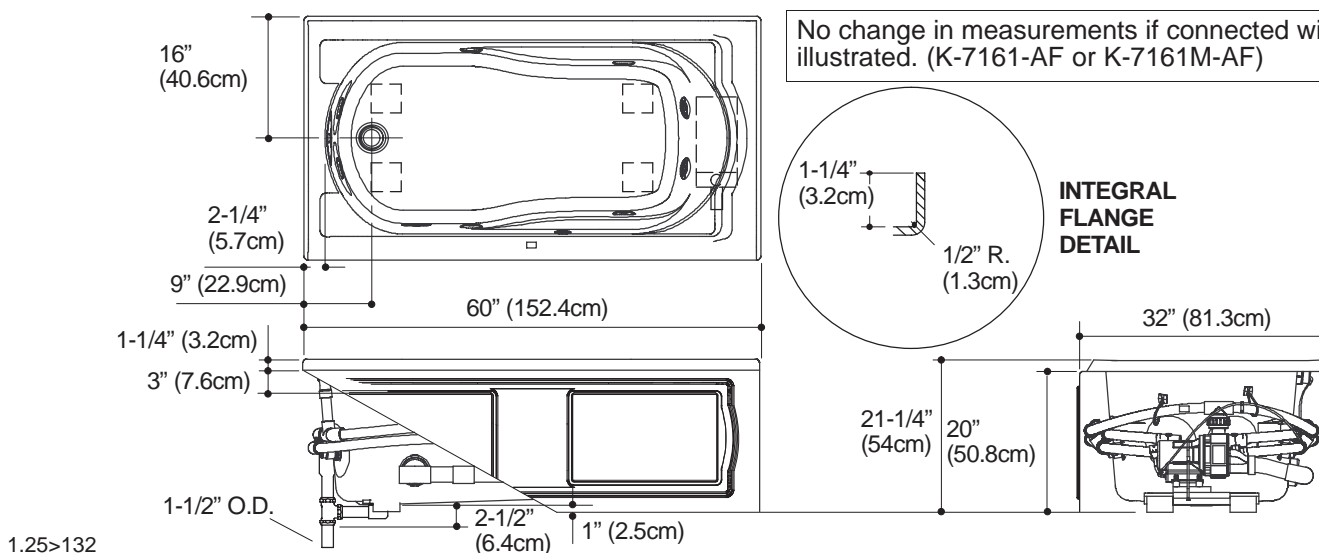

PRODUCT DIAGRAM