



Do not tighten any single bolt before it is placed in the right position.
After all the bolts are placed in the right position tighten them
one by one orderly

ASSEMBLY INSTRUCTION

1.- 1 PC.	2.- 1 PC.	3.- 1 PC.	4.- 1 PC.	5.- 1 PC.
				


A. - 2 PCS.	B. - 4 PCS.	C. - 4 PCS.	D. - 1 PC.	E . - 4 PCS.	F . - 4 PCS.
					

1

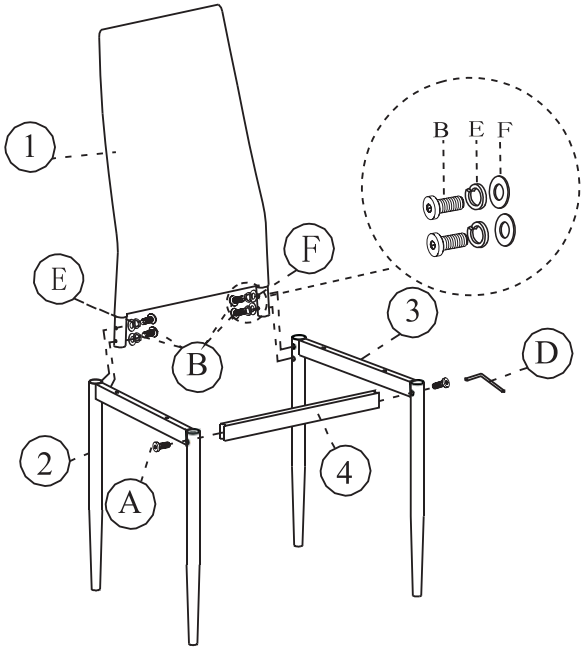

2

(Note: After assemble the seat pad,
Loosen the screws a little first,
put at least 50 kg on the seat,
and then tighten the screws,
which will be more stable.)

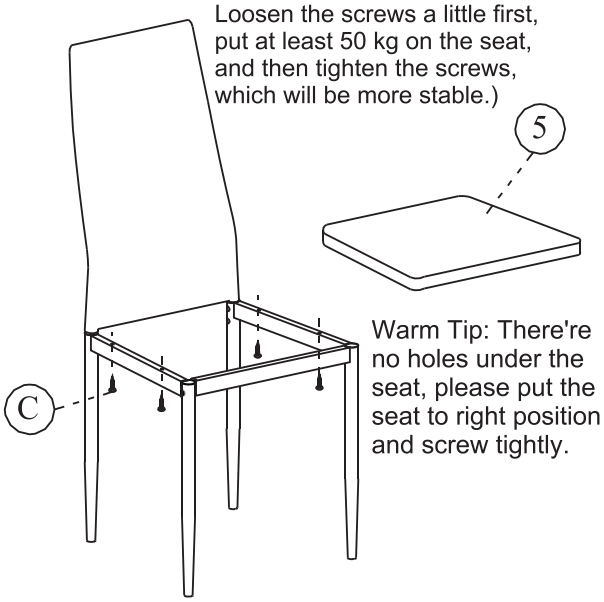

Warm Tip: There're no holes under the seat, please put the seat to right position and screw tightly.

3

