
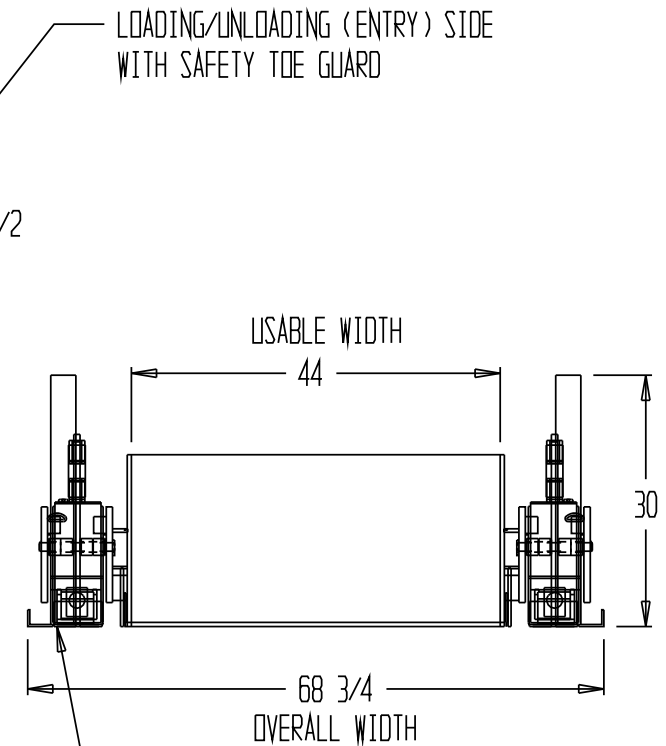
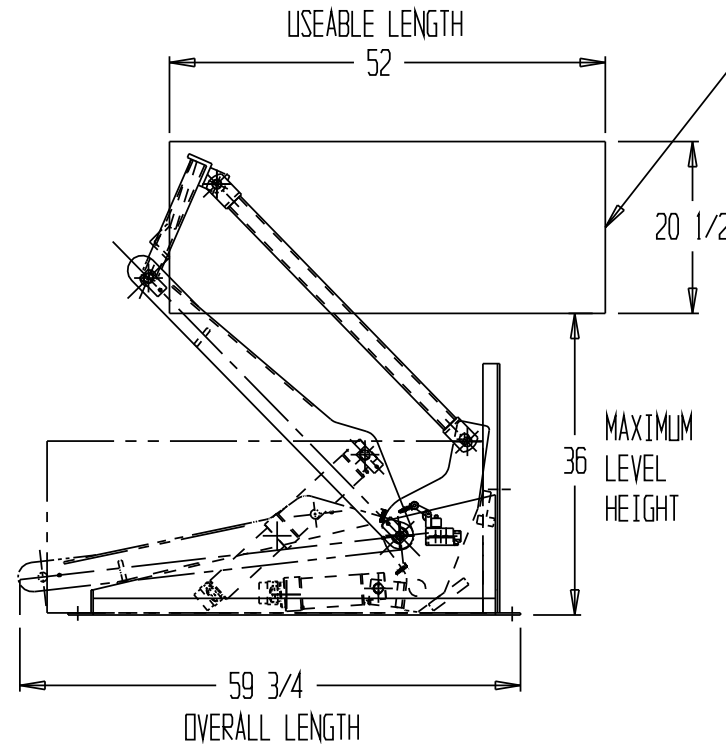


GROUND LIFT AND TILT TABLE, ZLTT-4452-4-36

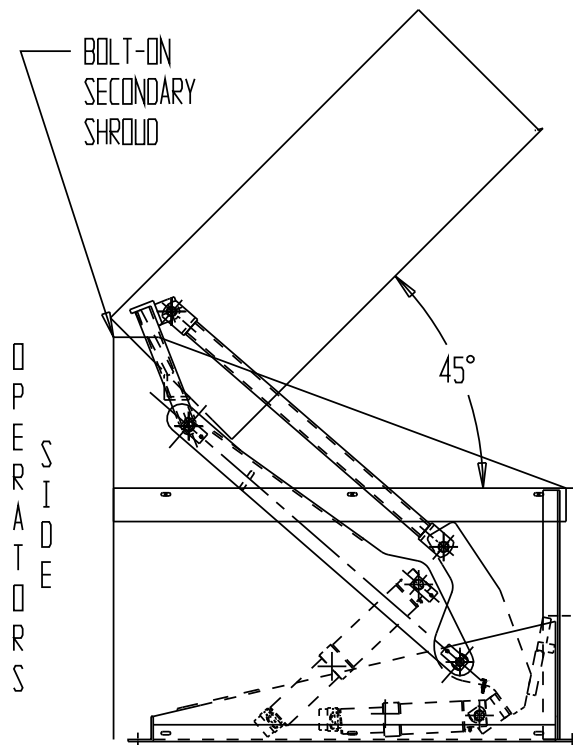

STANDARD FEATURES

MODEL NUMBER IS ZLTT-4452-4-36
 USEABLE WIDTH IS 44 INCHES
 USEABLE LENGTH IS 52 INCHES
 CAPACITY IS 4,000 POUNDS (EVENLY DISTRIBUTED LOAD)
 LOWERED HEIGHT IS 1/2 INCH WITH BEVELED ENTRY
 MAXIMUM LEVEL HEIGHT IS 36 INCHES
 MAXIMUM TILT ANGLE IS 45 DEGREES
 OVERALL WIDTH IS 68 3/4 INCHES (USEABLE PLUS 24 3/4 INCHES)
 OVERALL LENGTH IS 59 3/4 INCHES (USEABLE PLUS 7 3/4 INCHES)
 24V CONTROL IS STANDARD HAND HELD ON 8 FOOT CORD
 SAFETY TOE GUARDS ON FRONT (LOADING SIDE)
 OF DECK SIDE GUARDS W/ EXTENDED BOLT-ON SECONDARY SHROUD
 WATER BASED ENAMEL, PAINTED BLUE

SPECIAL FEATURES

NONE

PLEASE CIRCLE SPECIFICATIONS:

POWER	AC	*DC	*AIR/OIL	
MOTOR VOLTAGE	115	208	230	460
DEDICATED CIRCUIT REQUIRED				
MOTOR PHASE	SINGLE		THREE	
CONTROL	HAND		*FOOT	
** ALL BATTERY CHARGERS ARE 115V AC **				
BATTERY CHRG.	* REMOTE		ON-BOARD	
*CHRG. INDICATOR	YES		NO	

*AVAILABLE AT ADDITIONAL COSTS

Any additions, deletions or omissions must be corrected on this drawing, as this drawing will be considered all inclusive.

All graphics provided are for reference only. If certain dimensions are critical please verify those dimensions with your salesperson

SAFETY SHROUD COVERS PINCH POINTS

APPROVAL	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN & DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT & INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS & STANDARDS.	
	ALL SPECIAL UNITS ARE NON-RETURNABLE	
	[] As drawn	[] As marked
	Signed: _____	Date: _____
LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING		

FOR INTERNAL USE ONLY PROJECT SIGN OFF	
SALES	
ENG	
FAB.	
POWER	

DISTRIBUTOR'S NAME: VESTIL MFG		P.O.#: _
DRAWN BY: _____		W.O.#: _
DATE: _	SCALE: _	SALES: _
REFERENCE: _	QUOTE #: _	DRWG./FILE NAME: 04-007-030-001
QUOTED LEADTIME: _		