

# Installation Instructions for Shoe-Changing Bench

## Accessory Preview:



Screws, 12 pieces




A hexagonal wrench



Foot nails


## 1. Installation of the leg supports

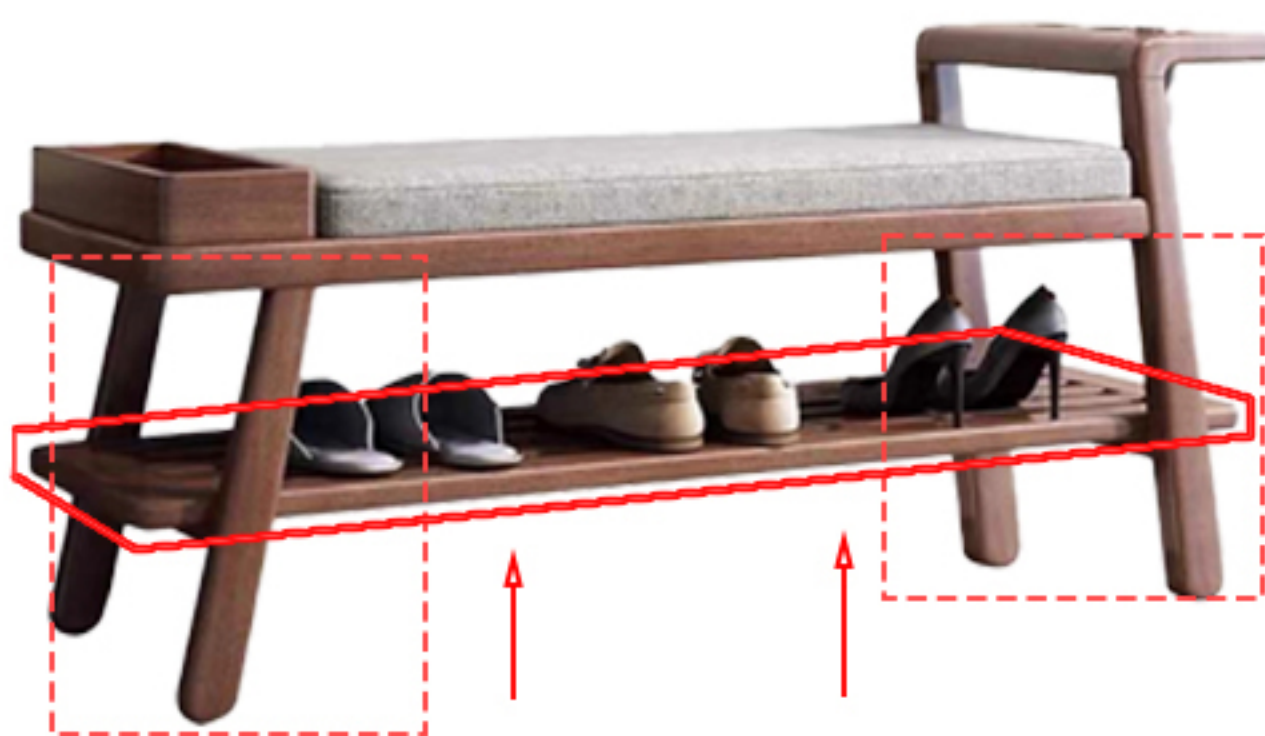

**Note: Both feet should splay outward in a “八”-shape . Do not reverse the direction.**

Turn the shoe-changing stool over. Fix the two legs of the stool separately with screws, and then tighten the screws with a hexagonal wrench.

## 2. Installation of the seat frame

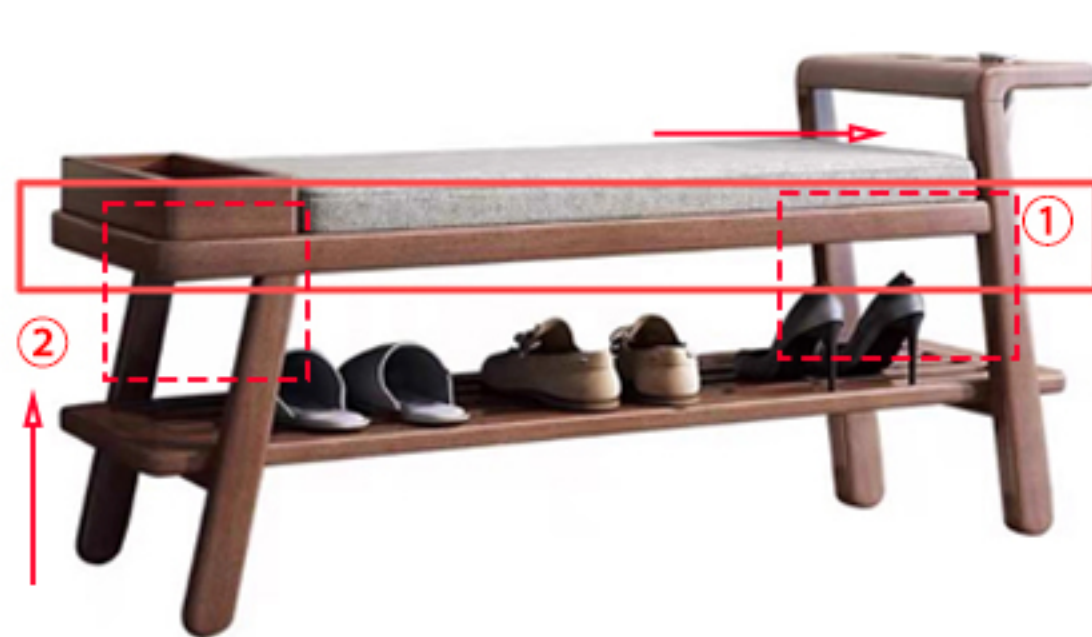

①



②

- ① The screw goes from the inside out. Use a hexagonal wrench to secure it.
- ② The screw goes up from below. Use a hexagonal wrench to secure it.

## 3. Installation of storage boxes and umbrella racks



**Note: The three holes of the umbrella stand are facing outward.**

The screw goes up from below and is fixed using a hexagonal wrench.

Finally, use a hexagonal wrench to reinforce each of the screws that we just installed once again.

4. The cleats can be installed according to the user's requirements, or they can be left uninstalled. If you want to install it, simply insert it directly into the sole of the foot.