
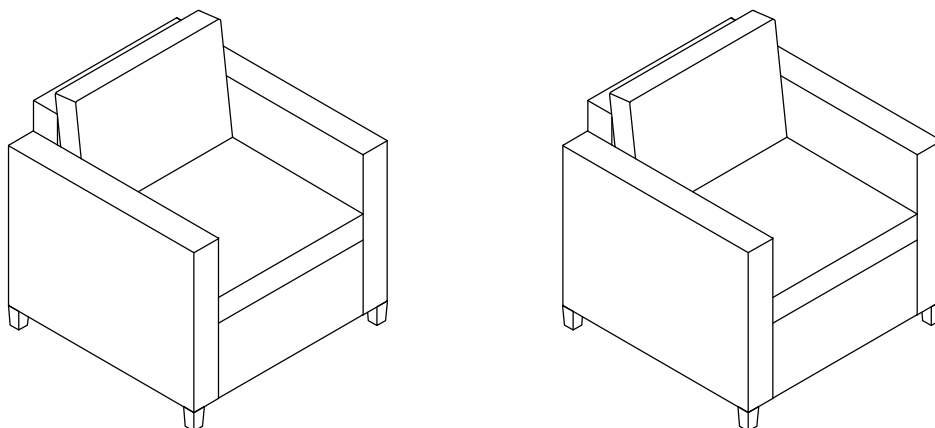
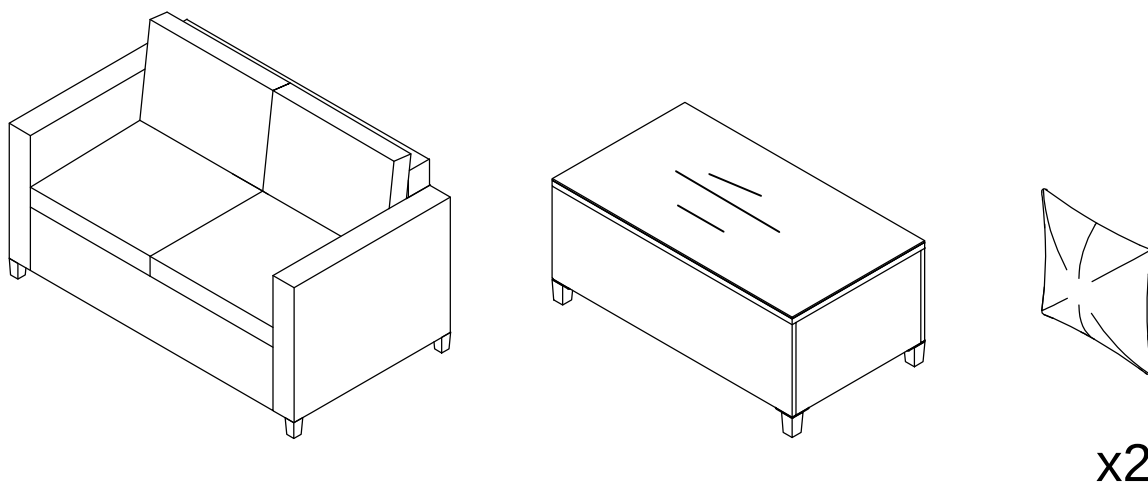
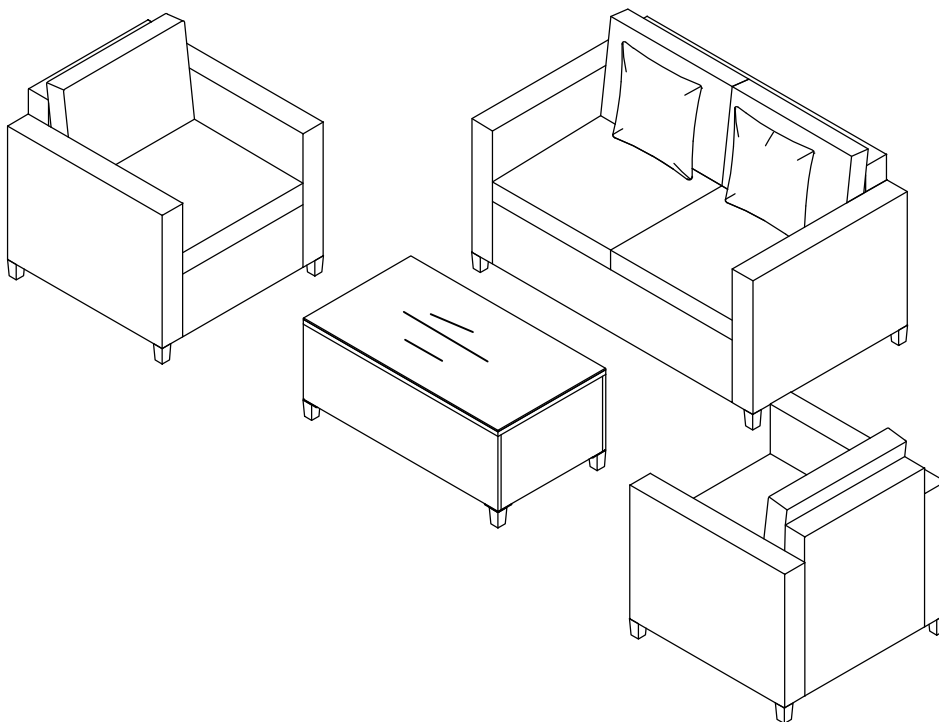






4-PIECE WICKER SECTIONAL SOFA SET




SINGER SOFA

DO THIS TWO TIMES


A		Seat Back	1PC
B		Left Arm Rest	1PC
C		Right Arm Rest	1PC
D		Seat Base	1PC
E		Leveling Foot	4PCS
F	 M6*50	Socket Head Cap Bolt	6PCS
G	 M6*60	Socket Head Cap Bolt	9PCS
H		Washer	26PCS
I		Nut	11PCS
J	 φ12/φ6.5×H2	Plastic Washer	4PCS
K		Allen Key	1PC
L		Wrench	1PC

Loose attach all connections at the beginning, adjust alignments then fully tighten all joints

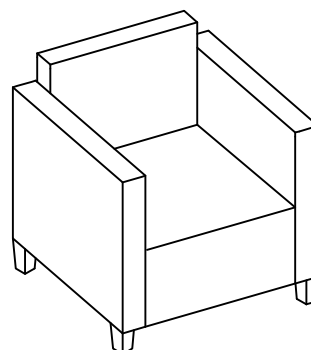


①

Flip over the components. Attach seat back (A) to left and right arm rest (B&C) using M6 x 50 socket head cap bolt (F), washer (H) and nut (I) as shown. Do this in four places.

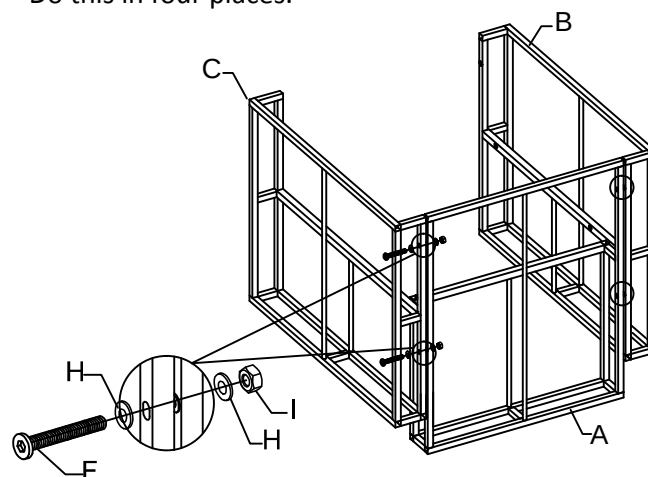

②

With the assembly still flipped over, attach seat base (D) to left and right arm rest (B&C) through the upper holes using M6 x 50 socket head cap bolt (F), washer (H) and nut (I) as shown. Do this in two places

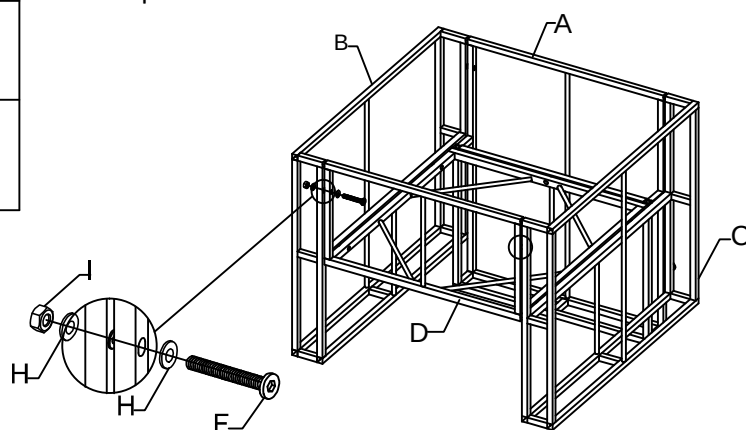


SINGER SOFA

DO THIS TWO TIMES


③

Attach the lower holes of the seat base (D) to left and right arm rest (B&C) and seat back (A) using M6 x 60 socket head cap bolt (G), washer (H) and nut (I) as shown. Do this in five places.

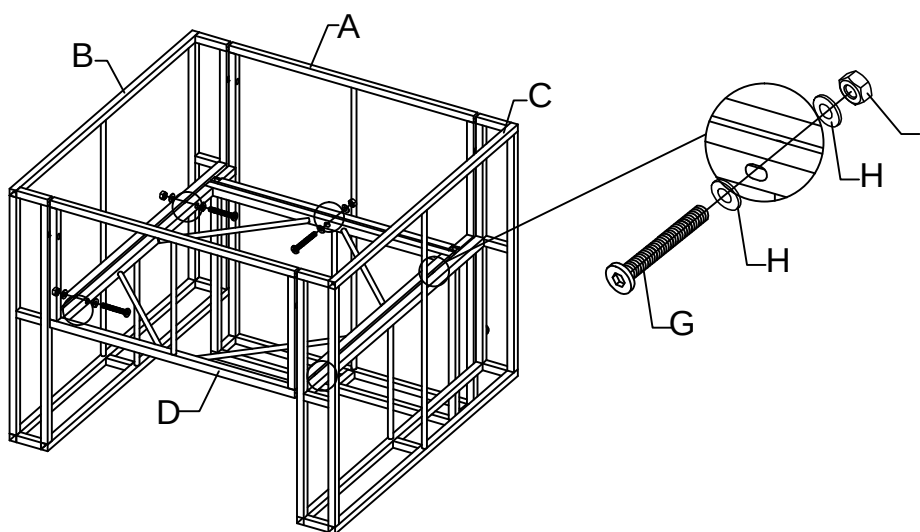




④

Attach leveling foot (E) to each corner using M6 x 60 socket head cap bolt (G), washer (H), plastic washer (J) and nut (I).

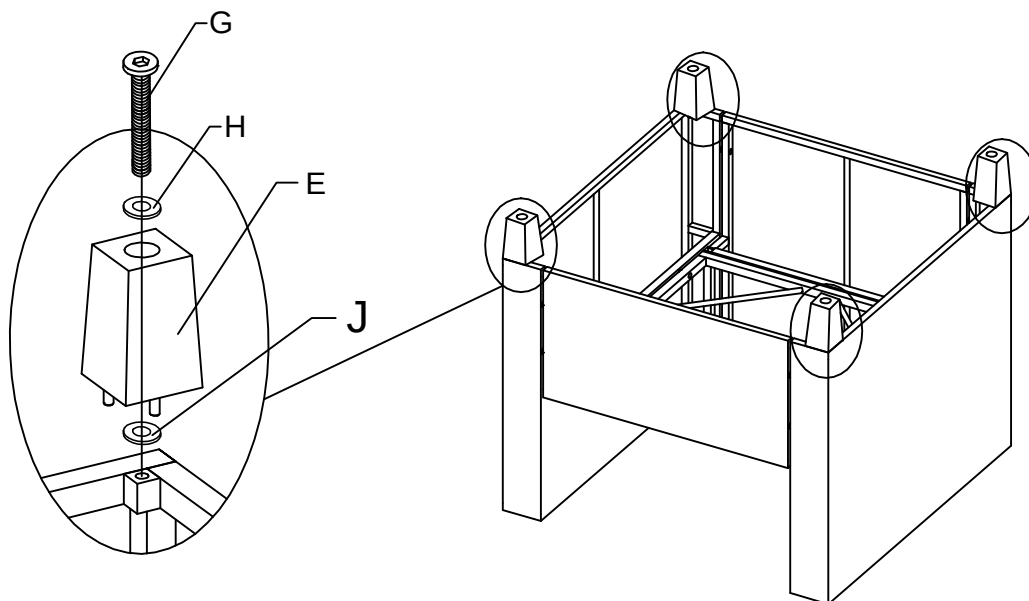


Loose attach all connections at the beginning, adjust alignments then fully tighten all joints

DOUBLE SOFA


A		Seat Back	1PC
B		Left Arm Rest	1PC
C		Right Arm Rest	1PC
D		Seat Base	1PC
E		Leveling Foot	4PCS
F	 M6*50	Socket Head Cap Bolt	6PCS
G	 M6*60	Socket Head Cap Bolt	10PCS
H		Washer	28PCS
I		Nut	12PCS
J	 φ12/φ6.5×H2	Plastic Washer	4PCS
K		Allen Key	1PC
L		Wrench	1PC

Loose attach all connections at the beginning, adjust alignments then fully tighten all joints

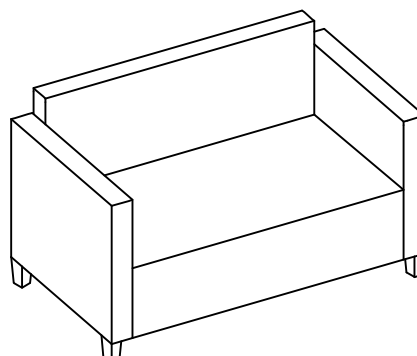


①

Flip over the components. Attach seat back (A) to left and right arm rest (B&C) using M6 x 50 socket head cap bolt (F), washer (H) and nut (I) as shown. Do this in four places.

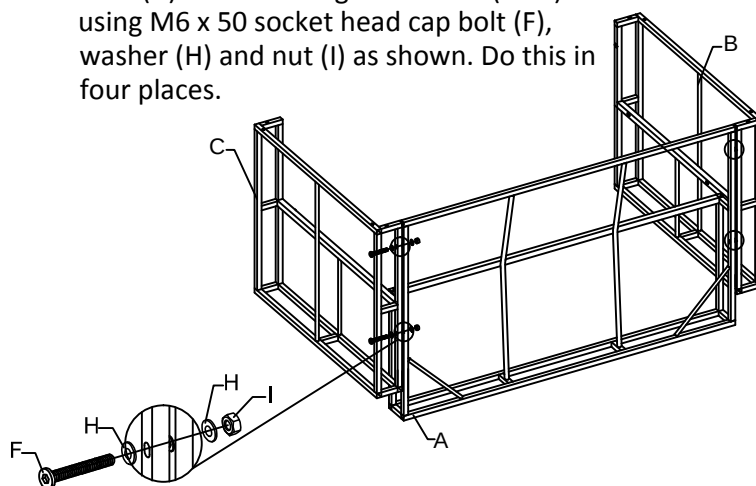


②

With the assembly still flipped over, attach seat base (D) to left and right arm rest (B&C) through the upper holes using M6 x 50 socket head cap bolt (F), washer (H) and nut (I) as shown. Do this in two places.

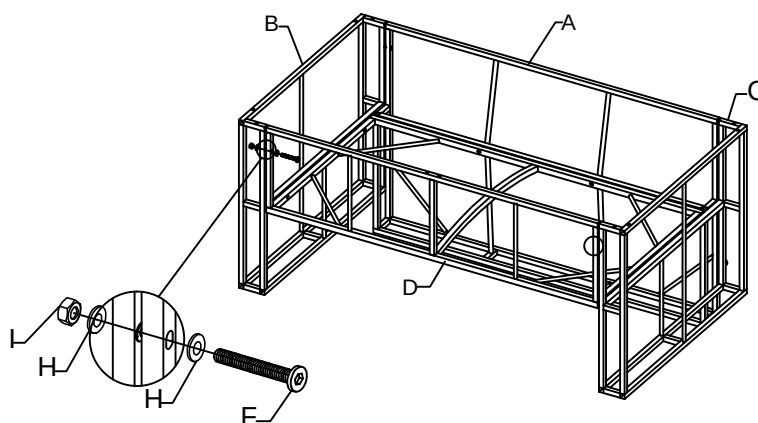


DOUBLE SOFA

- ③ Attach the lower holes of the seat base (D) to left and right arm rest (B&C) and seat back (A) using M6 x 60 socket head cap bolt (G), washer (H) and nut (I) as shown. Do this in six places.



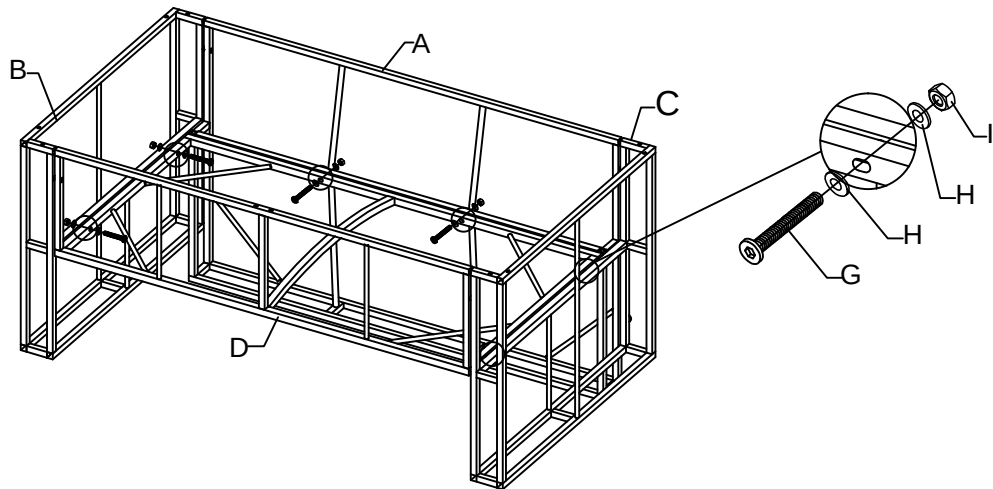



- ④ Attach leveling foot (E) to each corner using M6 x 60 socket head cap bolt (G), washer (H), plastic washer (J) and nut (I) as shown.

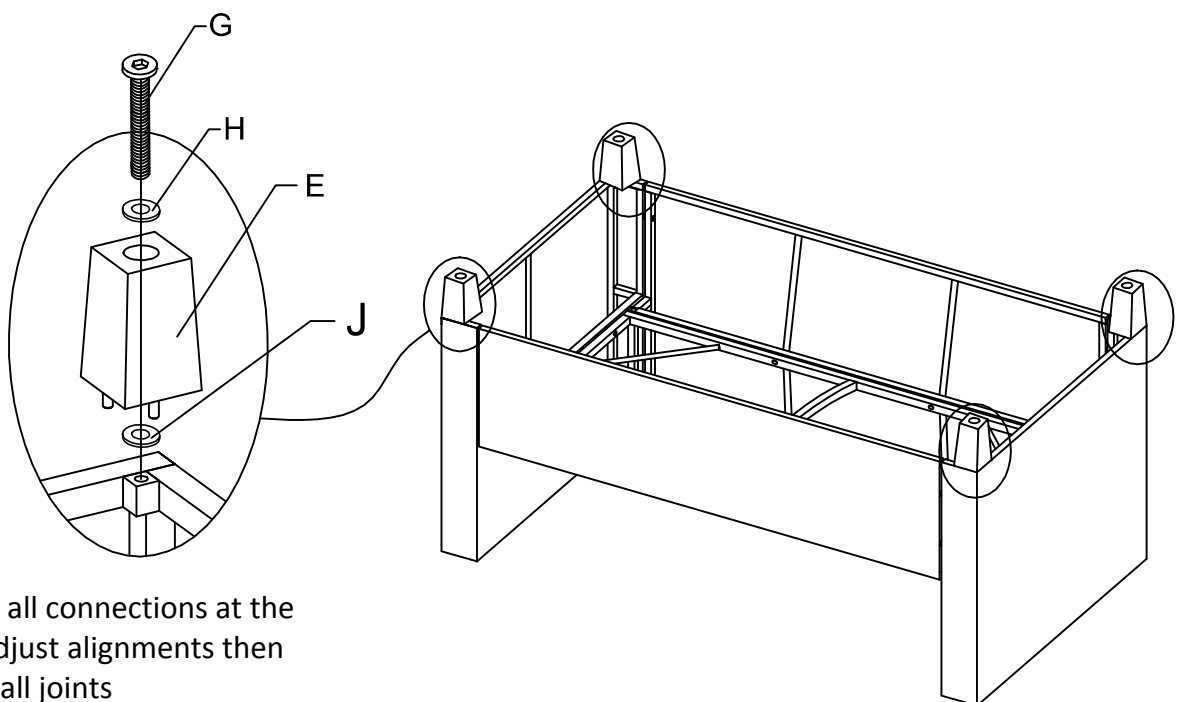

Loose attach all connections at the beginning, adjust alignments then fully tighten all joints


COFFEE TABLE

A		Table Top	1PC
B		Front & Back Panel	2PCS
C		Side Panels	2PCS
D		Glass	1PC
E		Leveling Foot	4PCS
F		Socket Head Cap Bolt	14PCS
G		Socket Head Cap Bolt	8PCS
H		Washer	22PCS
I		Plastic Washer	8PCS
J		Allen Key	1PC

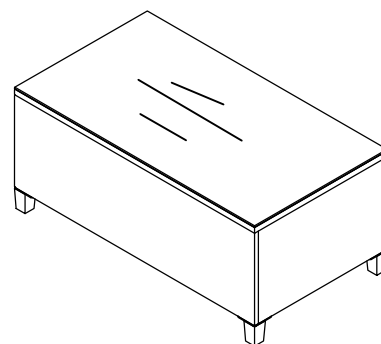


①

Attach front and back panel (B) to table top (A) using M6 x 35 socket head cap screw (F) and washer (H) as shown. Do this in six places.

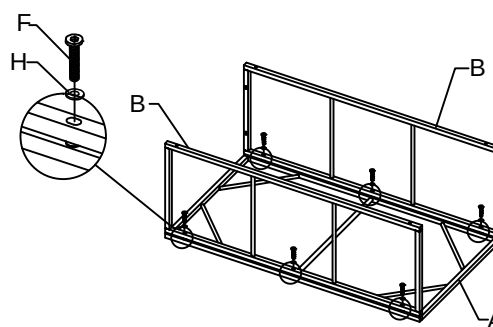


②

Attach side panels (C) to front and back panel (B) using M6 x 35 socket head cap screw (F) and washer (H) as shown. Do this in eight places.

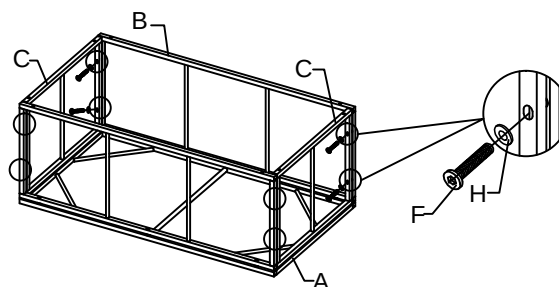


③

Attach leveling foot (E) to each corner using M6 x 20 socket head cap screw (G), washer (H) and plastic washer (I) as shown.

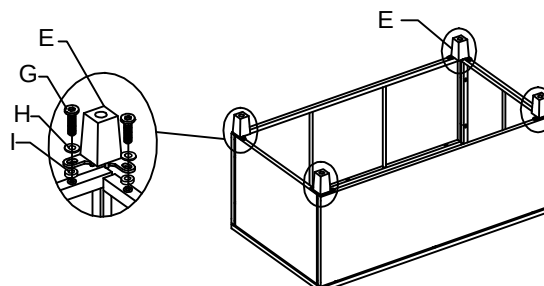

④

Flip over the assembly and place on the glass (D)

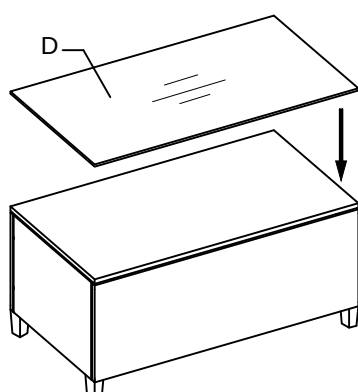

Loose attach all connections at the beginning, adjust alignments then fully tighten all joints