


HEAVY DUTY DOG CAGE




Parts List




1 x Dog Cage



1 x Plastic Tray



1 x Wire Tray



1 x Top Fence



2 x Wheels with Brake



2 x Wrenches



2 x Wheels



4 x Bolt Sets



2 x Screws



1 x Allen Key




4 x Rolled Strip


Installation Steps



1. Putting the product on the flat floor. Taking out the plastic tray, wire tray and all other accessories.

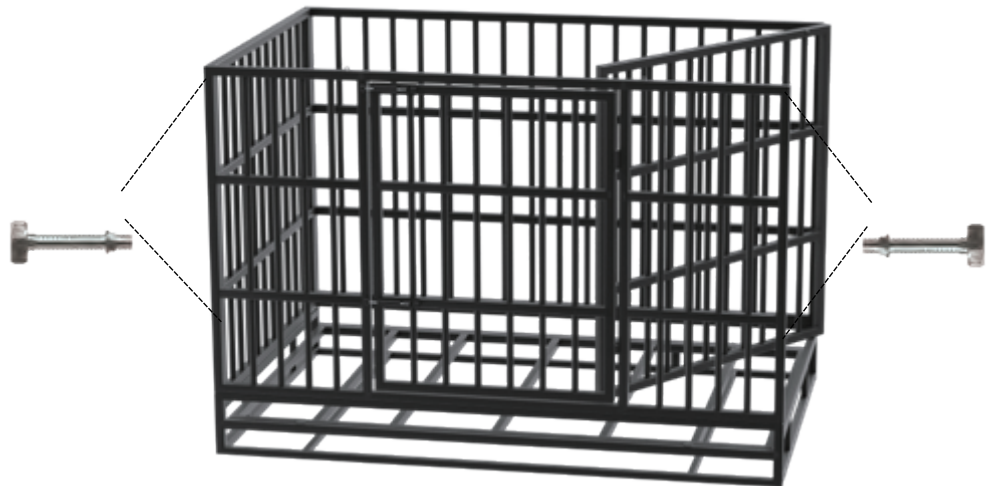


2. Expand the two sides and use 2 wrenches for tightening 4 Bolt Sets and all panels.

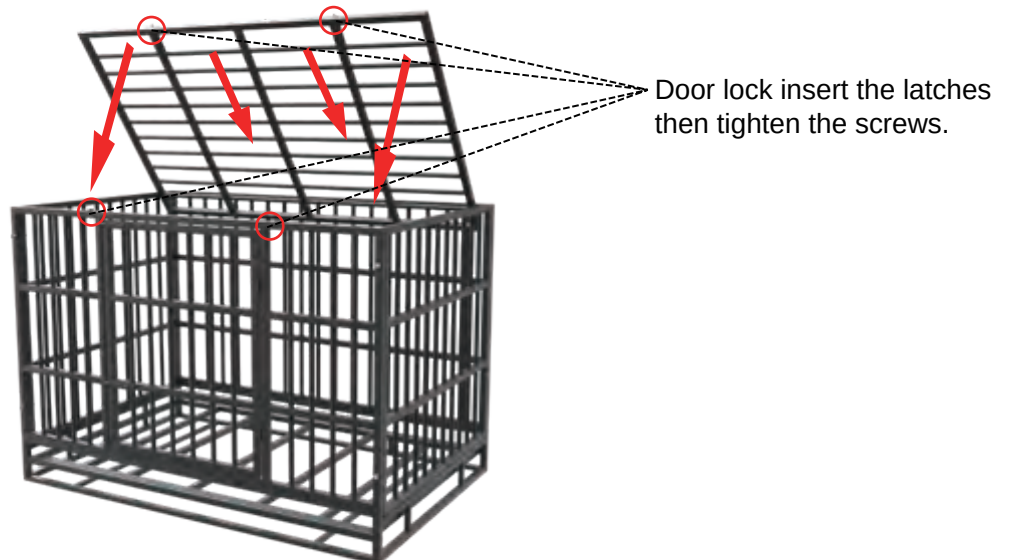

3. After laying "Top Fence" flat, insert the latches, then tighten the screws.

Installation Steps

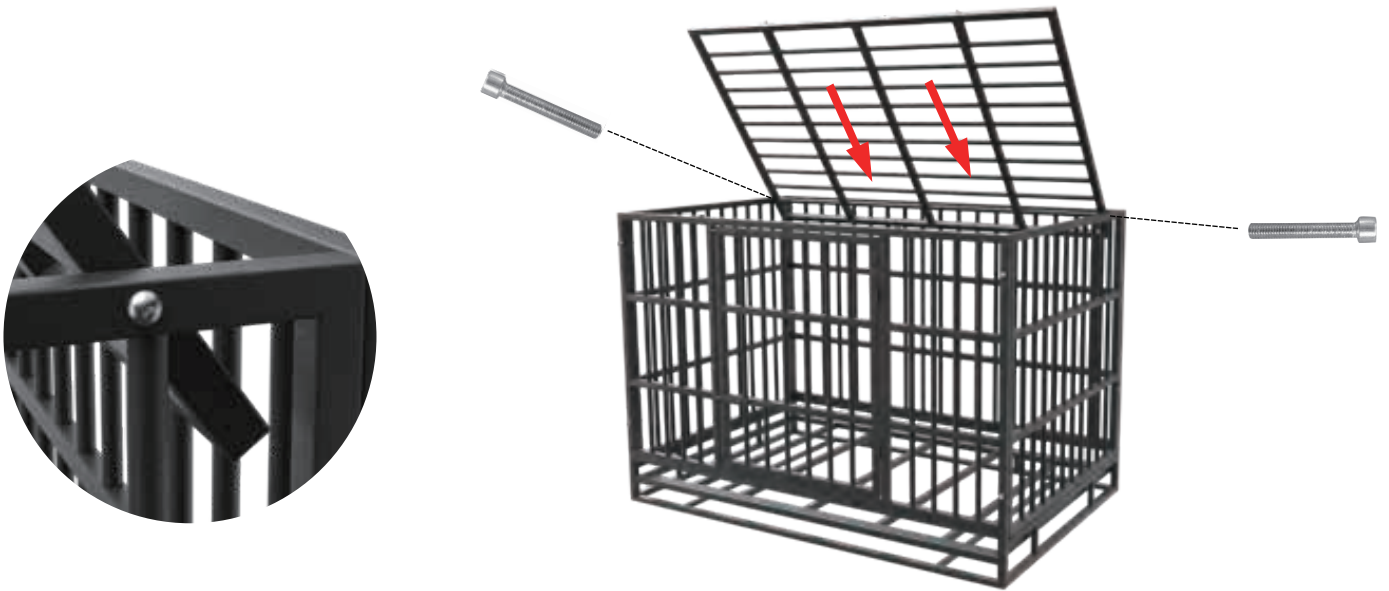

4. Use Allen Key to tighten the screws and top panel.

Make sure the Plastic Tray and Wire Tray are removed and that the Crate is empty.

2X wheels with brake



5. Put the cage upside down and use wrench to install 4 wheels.

Installation Steps



Please note the wire tray is face up


6. Inserting the wire tray and plastic tray into the bottom of the box in order, plastic tray is under the wire tray.



Clockwise rotation can be locked
Counter-clockwise rotation will loosen

Additional instructions

The wire is in the middle. Fix the tray to prevent swaying from side to side

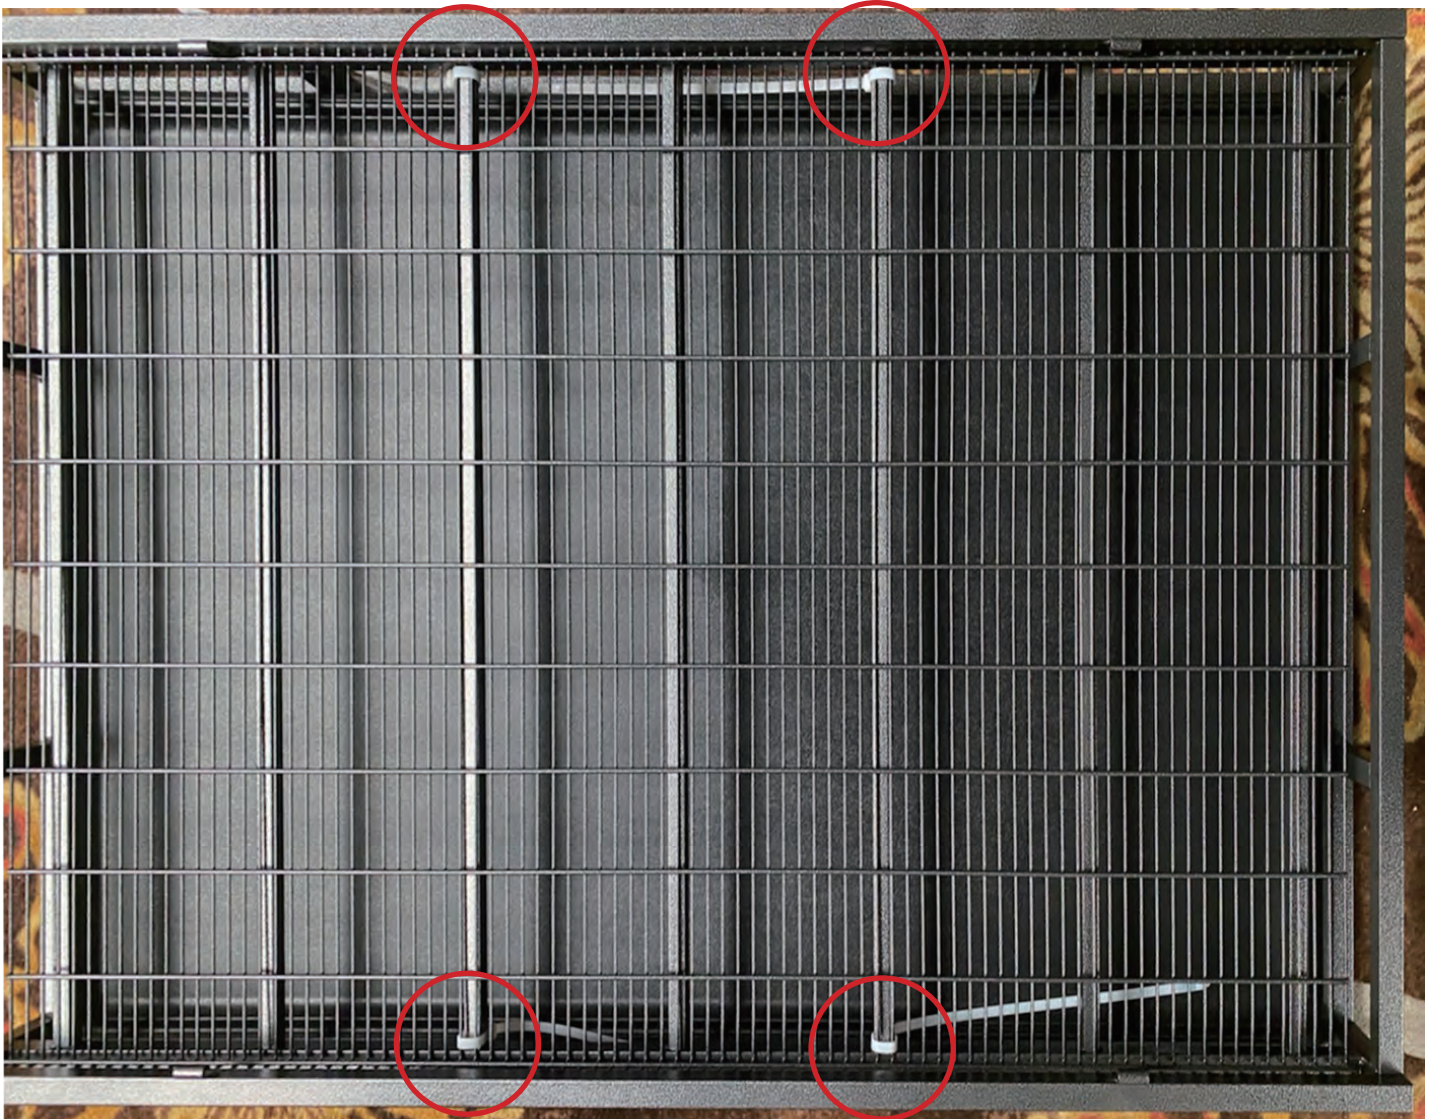

The wire is in the middle. Fix the tray to prevent swaying from side to sideAdditional instructions

1.

Q: The wheels of my product were fall off, what can I do?

A: Please check whether the weld of the dog cage is losing weld or the threads of the wheel are not available. If it was the wheels without threads, please contact us and we will provide you with a replacement. If it was losing weld, please send us some photos. We will provide you with a solution.

2.

Q: Can I put the plastic tray on the wire tray ? Because my dog like walk on the plastic tray.

A: We don't recommend that, because the plastic tray is used for collect the waste and can be easily damaged by dog.

3.

Q: The lock on the top of my crate can't align and can't close, what should I do?

A: First loosen the top two screws, then refer to step3,aligned them after the door closed andthen tighten the screws, you can solve the problem.