

Features

- Cast iron with Safeguard® finish
- Drop-in installation
- Integral grip rail along sides of bath
- Comfort Depth® with low step-over height and slotted overflow increases bathing depth
- Optional wood seat available
- Less all trim
- 65-7/8" (1673 mm) x 32-5/16" (821 mm) x 18" (457 mm)

Required Accessories

K-7271 Slotted Overflow Bath Drain

or

K-7272 Slotted Overflow Bath Drain



Codes/Standards

ASME A112.19.1/CSA B45.2

KOHLER® Lifetime Limited Warranty for Cast Iron Components

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------




0	White
---	-------



96	Biscuit
----	---------

No change in measurements with drain shown. (K-7271 or K-7272)

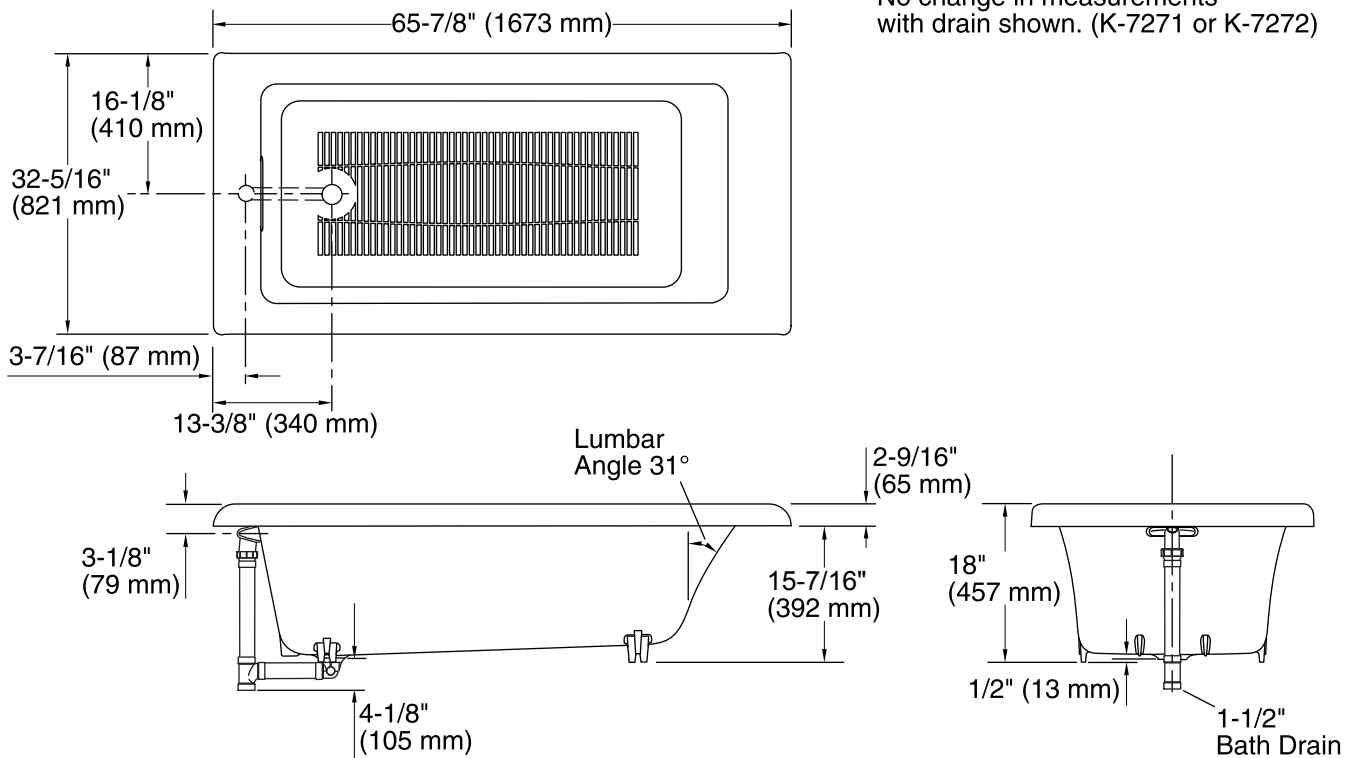

Technical Information

All product dimensions are nominal.

Installation:	Drop-in
Drain location:	Reversible
Basin area, bottom:	45-3/4" x 21-3/8" (1162 mm x 543 mm)
Basin area, top:	53-7/8" x 25-1/8" (1368 mm x 638 mm)
Minimum floor load:	61 lbs/ft ² (297.8 kg/m ²)
Water capacity:	61 gal (230.9 L)
Cutout:	Drop-in, 64-3/8" x 27-5/16" (1635 mm x 694 mm)