

### Features

- Acrylic
- Bask™ heated lumbar support with three temperature settings.
- Extra deep 27-1/2" (699 mm) soaking depth.
- 122 BubbleMassage™ airjets.
- Blower motor with 300 W heater, electronic user control, and remote control.
- With Zones of Control™ feature.
- Two raised corner seats, at 6-3/4" (171 mm) and 11-7/8" (302 mm) from bath floor.
- Chromatherapy
- Intended for drop-in or under-mount installation.
- Center drain.
- 48" (1219 mm) x 48" (1219 mm) x 34" (864 mm)

### Required Accessories

K-578 Not applicable



### Codes/Standards

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795



### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

- |  |    |         |
|--|----|---------|
|  | 0  | White   |
|  | 96 | Biscuit |

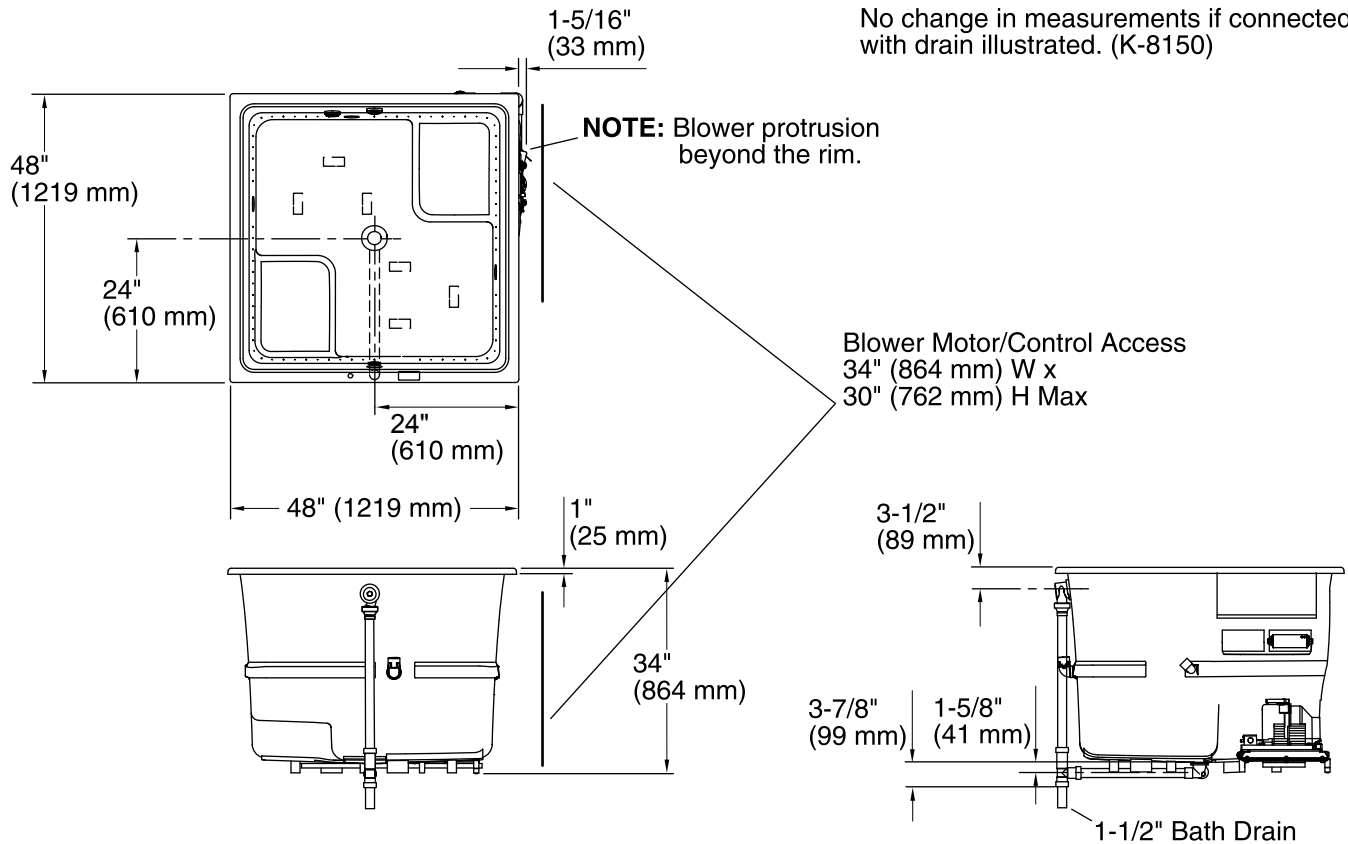

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Blower, Heated            220-240 V, 15 A, 50/60 Hz  
Surface:

### Technical Information

All product dimensions are nominal.

Installation:            Drop-in/Undermount  
Drain location:        Center  
Basin area, bottom:   39-3/8" x 39-3/8" (1000 mm x 1000 mm)  
Basin area, top:      44-5/8" x 44-5/8" (1134 mm x 1134 mm)  
Weight:                156 lbs (70.8 kg)  
Minimum floor load:   105 lbs/ft<sup>2</sup> (512.7 kg/m<sup>2</sup>)  
Water depth:         27-1/2" (699 mm)  
Water capacity:      171 gal (647.3 L)  
Cutout:                Drop-in, 47" x 47" (1194 mm x 1194 mm)  
Under-mount kit:     K-578  
Electrical rating:    Blower: 220-240 V, 5 A, 50/60 Hz  
                              Heated Surface: 120-220 V, 0.5 A, 50/60 Hz

### Notes

Measure your actual product for roughing-in details.

Install this product according to the installation guide.

Hot water supply should be 70% of capacity or greater. Installations will vary.