

ASSEMBLY AND MOUNTING DIAGRAM

Assembly Instructions

Important Safety Instructions & Warnings

Please read all instructions carefully before starting installation

We strongly recommend installation by a licensed electrician.

Make sure the electricity to the wires you are working with is shut off. The fuse is removed or circuit breaker is turned off. Simply turning the power off to the light switch is not sufficient to prevent electrical shock.


Before discarding the carton double check the box to make sure all parts has been taken out.



OFF

Tips!!!

To ensure you have a even lighting effect, please adjust the lamp pole up before installation, in other word, let it be vertical to your floor, instead of letting it attached to the acrylic defuser.

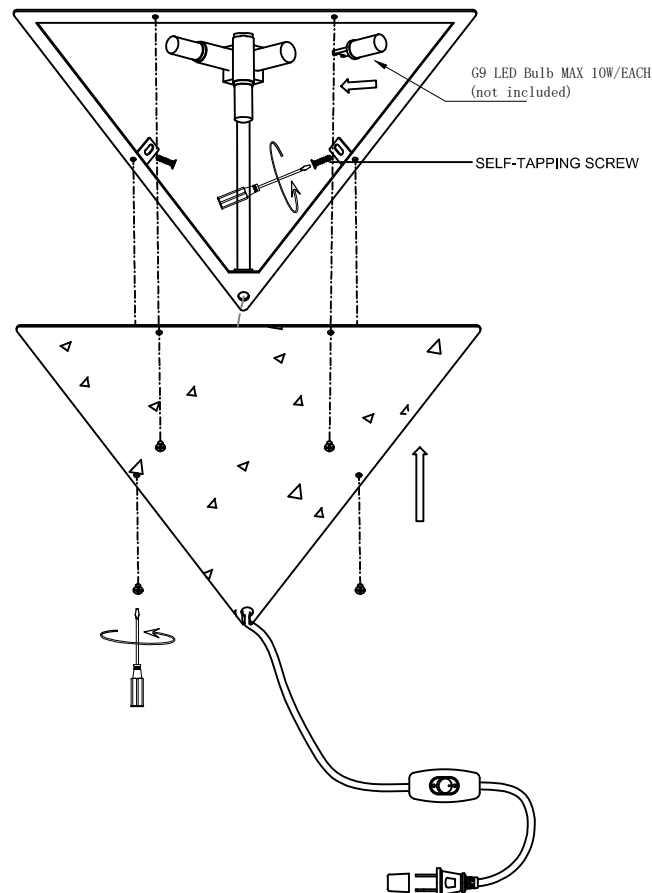

(INDOOR INSTALLATION ONLY)

For concrete and brick wall situation:

STEP 1 Attach triangle metal frame on to the corner you want to install, mark the mounting hole position by a pen.

STEP 2 Use a hammer drill to drill holes on the marks just made, then secure the triangle lamp fixture on by wall anchor and self-tapping screws.

STEP 3 Install the bulb. Please **use G9 LED bulb only**, this is very important, as G9 xenon and halogen bulb's working temperature is very hot, which may destroy or burn your wall/wall paper.

STEP 4 Install the acrylic diffuser on the lamp fixture by plastic screws.

STEP 5 Plug in the socket, enjoy it.

For wood wall situation:

STEP 1 Please use the self-tapping screws to secure the triangle lamp fixture directly at the corner.

STEP 2 Install the bulb. Please **use G9 LED bulb only**, this is very important, as G9 xenon and halogen bulb's working temperature is very hot, which may destroy or burn your wall/wall paper.

STEP 4 Install the acrylic diffuser on the lamp fixture by plastic screws.

STEP 5 Plug in the socket, enjoy it.

DIMMING:

This product is not dimmable.

CLEANING

Please clean with a soft, dry cloth ONLY! Do not use cleaning products.