

# 6 Light Bowl Branch Chandelier

**Caution:** Please turn off power before installation and read the manual carefully, we advise you contact professional electricians to install for safety purpose.

## Product Features

Style: Modern, Mid-Century

Material: Metal

Base Type: E12

Light Source Included: No

Voltage: 120V AC


Wattage: 60W Max (LED)

## Package includes

1 x Chandelier Light

1 x Accessories Kit

1 x User's Manual

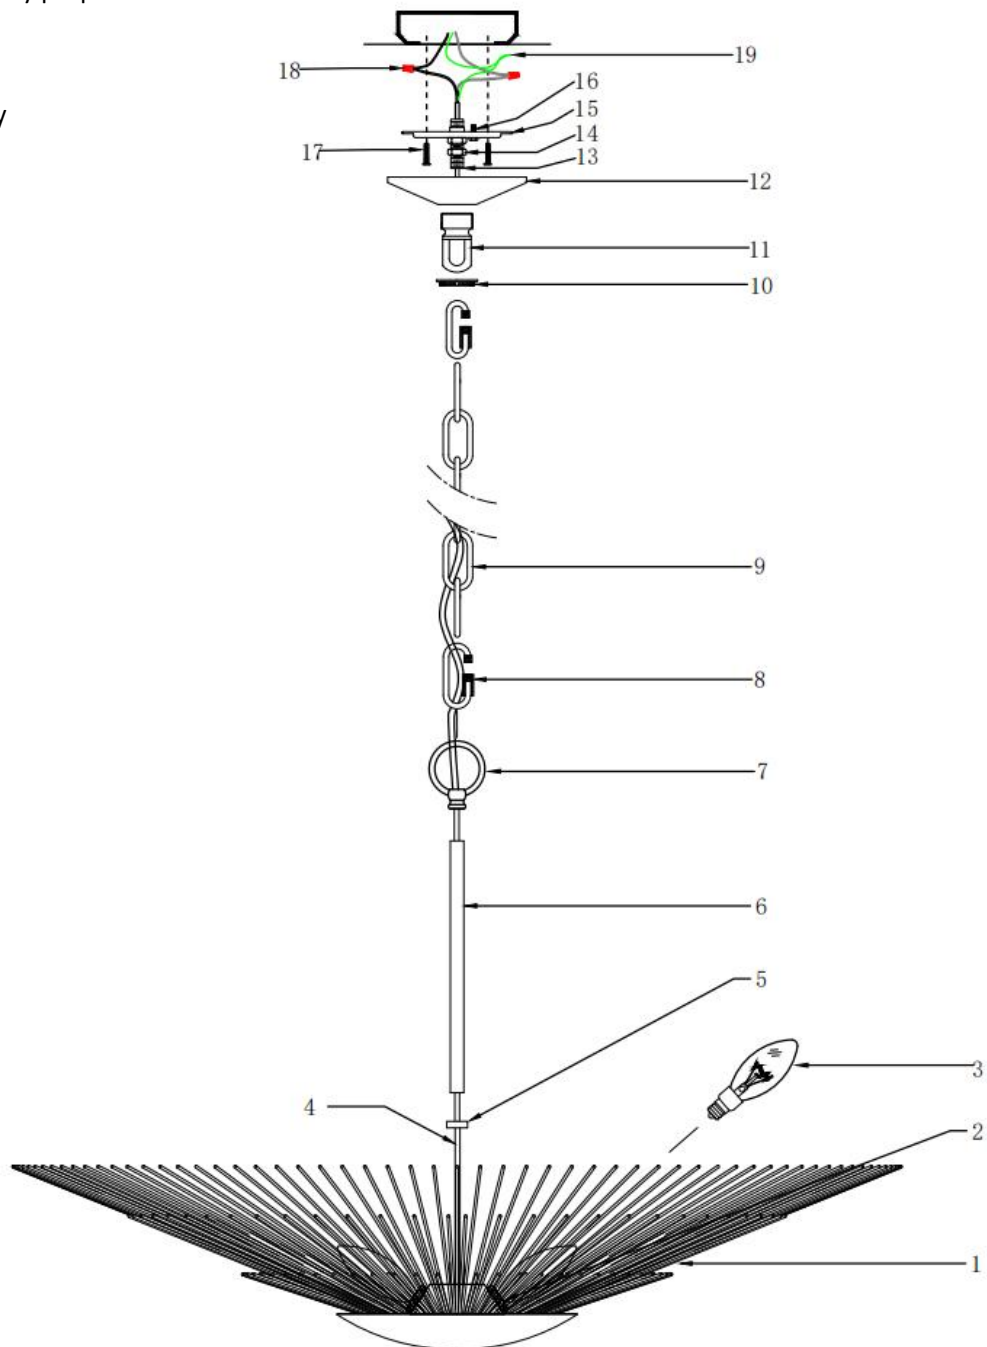

## Installation Instructions

A. Feed the fixture wires and ground wire (4) from the fixture body (1) through the center tube (6). Secure the center tube (6) onto the small cover plate (5).

B. Install the bulb (3) into the lamp holder(2) on the fixture body (1).

C. Feed the fixture wires and ground wire (4) through the loop ring (7), and then thread the loop ring (7) onto the center tube (6).

D. Feed the fixture wires and ground wire (4) through the hanging chain (9) as shown. Use the locking chain link (8) to connect the chain (9) to the loop ring (7).(Note: Adjust chain length as needed based on ceiling height.)

E. Feed the fixture wires and ground wire (4) through the threaded outer ring (10), then thread the outer ring (10) onto the canopy (12).

F. Attach the mounting bracket (15) to the ceiling junction box using the two hex nuts (14) and screws provided.

G. Feed the fixture wires and ground wire (4) through the threaded nipple (13), then thread the outer ring (11) onto the nipple (13). Secure it in place with the hex nut (14).

H. Secure the mounting bracket (15) to the outlet box using the outlet box screws (17).

I. Wire connection:

Connect the smooth (or lettered) wire from the fixture to the live (black) house wire using a wire nut (18).

Connect the ribbed (or unlettered) wire from the fixture to the neutral (white) house wire using a wire nut (18).

Connect the ground wire (19) from the junction box to the ground wire (4) from the fixture using the green screw (16) on the mounting bracket (15).

(Important: Make sure no bare wire is exposed outside the wire nuts to prevent electrical shock.)

J. Carefully push all connected wires into the junction box. Slide the canopy (12) up to cover the bracket and secure it in place by threading the outer ring (10) onto the mounting loop (11).

K. Use the locking chain link (8) to connect the hanging chain (9) to the mounting loop (11). Push any excess wire into the junction box.

**Note:** please use this product accordingly to its intended purpose, do not retrofit or remodeling the product. The warranty does not cover if the failure is caused by the third party product, or natural disasters.

Made in China