

ASSEMBLY AND INSTALLATION INSTRUCTIONS

Item No: HWBD028-2


WARNING: To reduce the risk of electric shock, turn off power at the circuit breaker or fuse box before installing, servicing, or cleaning this fixture.

If you are not familiar with electrical wiring, we recommend hiring a qualified electrician.


NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions for reference.
3. Turn off power and allow the bulbs and fixture to cool for at least 10 minutes before replacing the bulbs.

2-LIGHT OUTDOOR WALL SCONCE

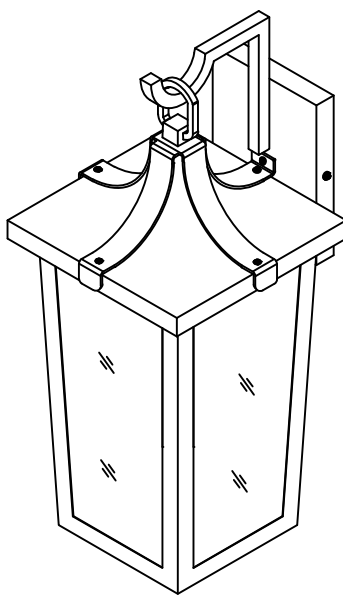


TOOLS REQUIRED




Flathead
Screwdriver




Phillips
Screwdriver



Ladder




Wire Strippers



Pliers



Electrical
Tape



Wire Cutters



Safety Glasses

PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. Keep all packaging materials until installation is complete to ensure no parts are left in the package.

PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY
A	Wire nut	3
B	Mounting plate	1
C	Green ground screw	1
D	Outlet box screw	2
E	Flat Washer	2
F	Rubber Pad	2
G	Mounting screw	4
H	Square Tube Metal Bracket	1
I	Hanging Ring	1
J	Waterproof Gasket	1
K	Fixture body	1

INSTALLATION

1. Secure the mounting plate (B) to the junction box and tighten with junction box screws (D).
2. Slide the waterproof gasket (J) over the pre-assembled fully threaded tube of fixture body (K), then lock tightly with hanging ring (I).
3. Hook square tube metal bracket (H) onto hanging ring (I), align holes with fixture body backplate, fasten with mounting screws (G) and flat washers (E).
4. Install two E12 base Type B bulbs, maximum 40 watts each. (Bulbs are not included) .
5. Connect the supply ground wire (green/bare copper) to the fixture ground wire. Connect the black supply wire to the black fixture wire and the white supply wire to the white fixture wire. Secure all connections with wire nuts (A).
6. Attach fixture body (K) to mounting plate (B) with rubber pad (F) and mounting screws (G).

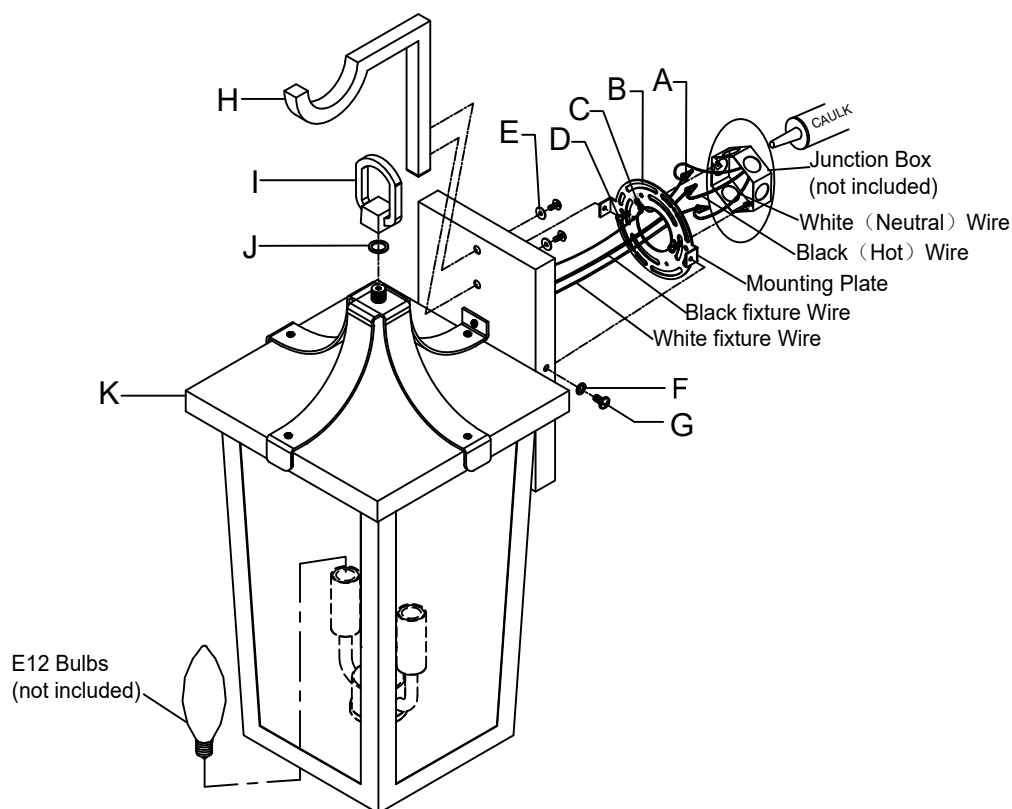

Questions, problems, or missing parts?

Before returning the product, please contact our Customer Support team. We are here to help 24/7. Please include your order number and photos of the issue for faster assistance.

 lighting_service@outlook.com