

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact: \_\_\_\_\_

Ceiling mounted • Dry location listed



## Description:

This 52" ceiling fan features three blades available in Brushed Nickel finish. Coolly modern, this ceiling fan offers both form and function with an energy efficient 17W LED source with a 3000K-color temperature. Features a wall control switch. Can be used to comply with California Title 20. Can be used to comply with 2016 Title 24 JA8.

## Specifications:

- Brushed Nickel (plated)
- Steel construction
- Etched Opal glass bowl
- The light kit contains a etched opal glass shade and is comprised of a 17W dimmable 3000K LED module, offering 1500 lumens, 90+ CRI
- Includes a wall control switch
- Indoor ceiling fan ideal for use in great rooms, living rooms, bedrooms and bonus rooms
- This ceiling fan adds form and function - by providing increased air circulation in rooms
- As a general rule of thumb, lighting experts suggest this fan is ideal in a room size that ranges from 226- to 400-square feet
- Includes easy to assemble canopy system that can be installed on vaulted ceilings up to 4:12 pitch
- A 3/4" x 4-1/2" downrod is included. Longer accessory downrods can be ordered separately
- Can be used to comply with California Title 20.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting plate for outlet box included
- 54 in of wire supplied
- Silver blades, plywood construction
- 12 degree blade pitch
- Wall Control Included
- Dual-mount for downrod or close-to-ceiling installation
- Triple capacitor speed control, manual reverse control
- Meets California Title 24 JA8-2016
- Airflow: 4742 CFM\*
- Energy consumption: 64 watts (excluding lights)\*
- Airflow efficiency: 79 cfm/watt\*
- \* Fan on a downrod

## Images:




## Dimensions:

Diameter: 52"

Height: 15-3/4"

## Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	1500/88.2 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	(L70/TM-21)
EMI/RFI	FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	Limited Lifetime warranty
Labels	UL Dry location listed
	Meets California Title 24 JA8-2016

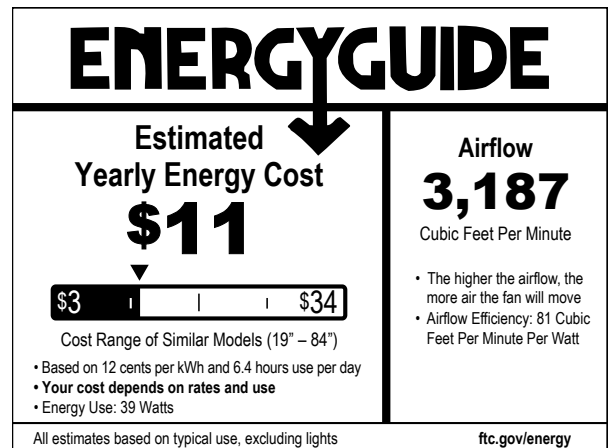



### Dimming Notes:

---

This collection is designed to be compatible with many controls.

The following is a partial list of known compatible dimmer controls.

### Dimming Controls

---

Lutron - NTEVL-300

Lutron - DVELV-300P

Lutron - Caseta Wireless

Leviton – 6672

Leviton – 6674

Lutron - AYCL-153P

Lutron - AYLV-600P

Lutron - MAELV-601

Leviton - AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.