

4" Round Regressed Gimbal LED 11.4 W



Type IC, Wet & Air-Tight

DESCRIPTION

4" Round Regressed Gimbal LED With
Integral Driver In Connection Box
Unique & Patented Design:
Gimbal Yet Air-Tight Without Housing Needed


FEATURES & BENEFITS

3" Deep - Install Where Ceiling Space Is Limited
Type IC Rated - No Housing Required
Fast & Easy To Install - Save On Labor
Directional Beam - Great for Sloped Ceilings and Artwork
CRI 90+ for True Color Rendering

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With
Attached Spring Clips. Ceiling Clearance Required: 3"

DIMENSIONS: ID 4 3/4" OD 5 3/4" Cut Out 4 3/4" to 5"

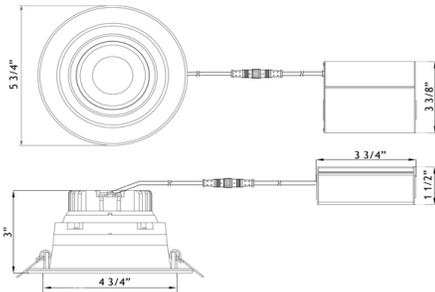

120V TRIAC Dimmable Driver Included



Optional 120V-347V Driver 0-10V Dimmable



Order Separately as
Cat # LLL-LD1025T

ORDERING GUIDE Example: **LRG4 - 30K - WH**

	CCT	Trim Finish	
LRG4	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4000K	40K		
Dim to Warm 3000K to 2000K	32K		White Trim Only In Stock

Lotus LED Lights USA

www.LotusLEDLights.com

250 H Street # 301, Baine WA 98230 tel 360-200-5500

Warehouses: Hainesport NJ, Naples FL, Dallas TX, Las Vegas NV, Lynnwood WA

Lotus LED Lights CANADA

800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090

Delta BC & Mississauga ON

Project: _____

Location: _____

Cat #: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Sloped Ceilings, Highlighting Artwork
Energy Used	11.4 W
Color Temperature	2700 3000 4000 DTW 30-20
Light Output	960 1000 1050 800
Halogen Equivalent	50 W
Beam Angle	38° wide beam with 20° tilt and 360° rotation
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW), T24
Warranty	10 Year on Residential 5 Year on Commercial Applications

AVAILABLE TRIMS



White



Black

ACCESSORIES

Sold Separately



Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plates - cat # **RIP5**



Flanged Rough-In Plate - cat # **FRP5**

COMPLIANCE



**Type IC
Air-Tight**

USA Patent # US 10,344,952 B2 | Canada Patent # 2,967,954