

Features

- Replaces K-201 and K-202 filters
- Single-stage filtration and absorption system.
- Filter reduces particulates, sediment/rust, turbidity, cysts, chlorine taste/odor, and lead.
- Cartridge filter can be twisted in and out for easy replacement.
- Replace filter media every 1389 Gallons (5258 L) or six months
- 1.39 gallons per minute (5.26 liters per minute) maximum flow rate at 60 PSI
- For use in Models K-200, K-6665-F, and K-6666-F
- Meets NSF International standards.




Codes/Standards

CSA B483.1
NSF/ANSI 42
NSF/ANSI 53
All applicable US Federal and State material regulations

KOHLER® Water Filter Systems Five-Year Limited Warranty

See website for detailed warranty information.

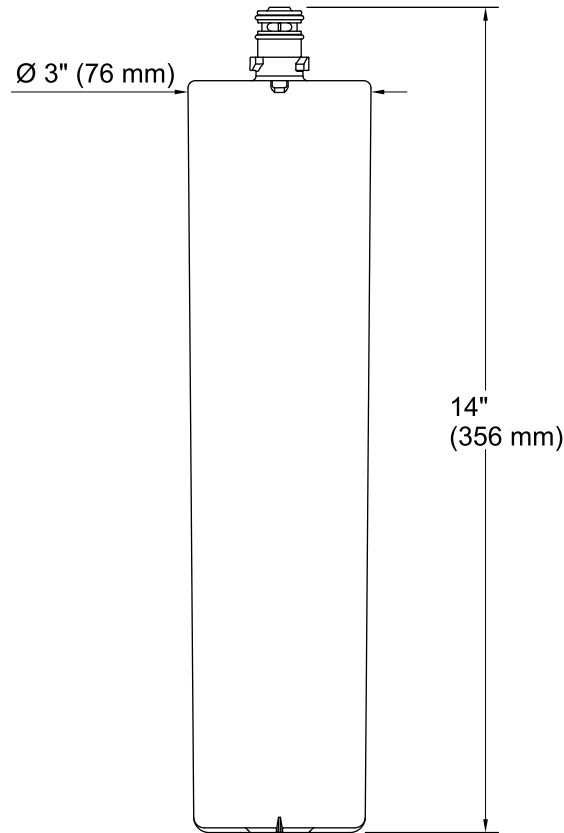

Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation instructions.

For cold water use only.

Application guideline/water supply parameters:
Water Pressure: 40-120 psi (276-827 kPa) Water
Temperature: 33-100°F (0.5-37.8°C) Capacity:
1389 gal (5258 L)