


edishine

Ceiling Lights

SKU: HFCL10A
[Instruction Manual]

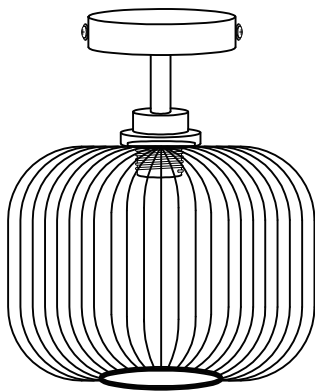

Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

V50709

Warning:

Risk of fire. Min 167°F/75°C supply conductors. Consult a qualified electrician to ensure correct installation. Before installation, please turn off the main power of the circuit breaker to prevent possible electric shock.

Installation Instructions

FIG.1. Turn the wall switch to the "OFF" position. Depending on which type of fuse box in your home:

FIG.2. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or turn off the individual switch that supplies power to where the fixture will be installed.

OR

FIG.3. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or unscrew the fuse that supplies power to where the fixture will be installed.




FIG.1 WALL SWITCH




FIG.2 BREAKER PANEL







FIG.3 FUSE BOX

PACKING LIST

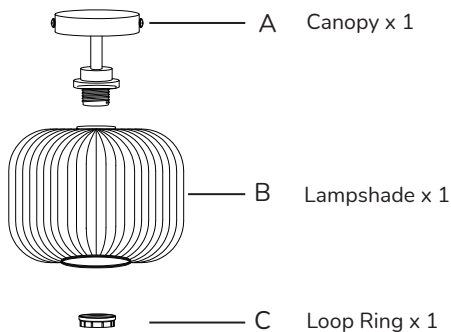

INSTALLATION KIT



1. Mounting Bracket Screw (EE), Ground Screw (CC) have been pre-installed on Mounting Bracket (AA).

Step 3.

Fix Canopy (A) to Mounting Bracket (AA) using Mounting Bracket Screw (EE).

Step 4.

Put Lampshade (B) into Canopy (A) and fix it with Loop Ring (C) rotation.

Step 5.

E26 Bulbs X 1

(Max 60W each, not included)

Specifications

- Input Voltage: 120VAC 60Hz
- Max.Load Power: incandescent Bulb 60W
- Socket Type: Standard Medium E26

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date.

Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.



Made in China