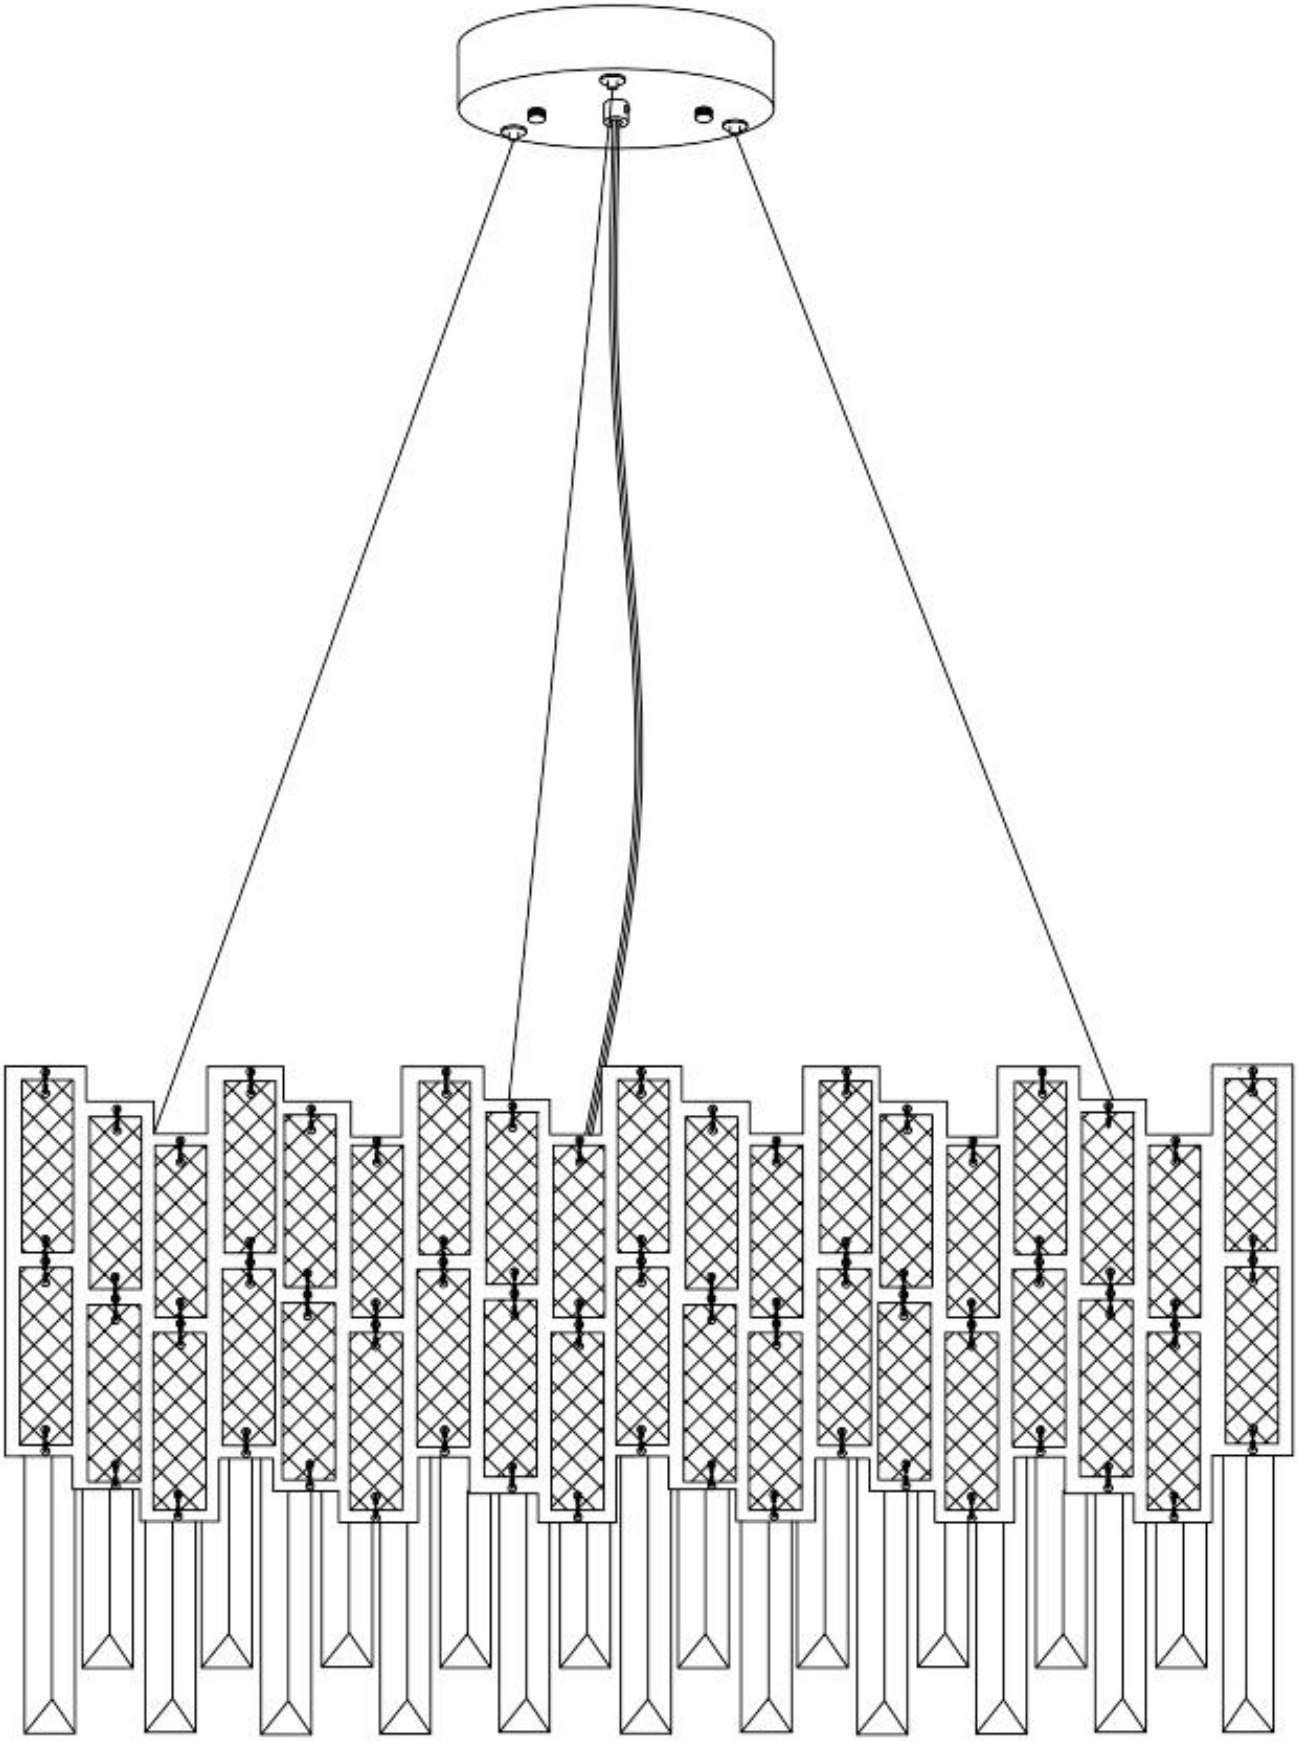


INSTRUCTION MANUAL

NOTICE:

IMPORTANT, KEEP FOR FUTURE REFERENCE PLEASE READ CAREFULLY.

IF YOU HAVE ANY CONCERNS ABOUT THE PRODUCT, PLEASE FEEL FREE TO CONTACT US BEFORE YOU LEAVE A REVIEW.

CAUTION:


1. The installation requests a professional electrician to operate. Please make sure the installation environment ventilating and dry.
2. Wearing gloves during installation to prevent yourself from scratching by the fixtures.
or electric wire. Be sure the power has been turned off before operation.
3. Make sure the fixture is away from corrosive chemicals and air such as acid and alkali. Clean the fixture by wiping it with a dry rag.
4. Do not touch the bulb when the fixture is turned on or look directly at the lit bulb. Keep flammable materials away from the lit bulb.
5. To reduce the risk of fire, electrical shock, and personal injury, always turn off and unplug the fixture and allow it to cool before replacing the light bulb.

STEP-BY-STEP INSTALLATION

1. Shut off the power at the circuit breaker and remove the existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts in a clear area, Be careful not to lose any small parts necessary for installation.
3. Install the chains to the lamp body, and the canopy.
4. To finish the structure of the lamp body, it need to fix the metal tube on the metal ring with screws.
5. Remove the mounting screw from the light fixture.
6. Secure bracket to the junction box using junction box screw.
7. Connect the wire (N) from the light fixture to the white supply wire (N) from the junction box using a wire connector.
Connect the wire (L) from the light fixture to the black supply wire (L) from the junction box using a wire connector.
8. After wires are connected, tuck them carefully inside the junction box.
9. Mount the canopy onto the bracket and secure it with the ring.
10. Add the E12（US）/E14（EU） bulbs, and turn on the power, check whether the light fixture works normally or not.
11. Ensure the light fixture work normally, then install the crystal. There are three sizes of the crystals: A/B/C. For the lamp body, you need to hook up A crystals on both sides. For the rest layers, we suggest hanging them by using butterfly clips, in the order of BC BC BC to achieve the best visual effect.

HEIGHT ADJUSTMENT

NOTE: It is recommended to make any major adjustments to the height of the light fixture before installation. Loose the chain lock, and then adjust your desired length, tighten the chain lock on the lamp body and the canopy.

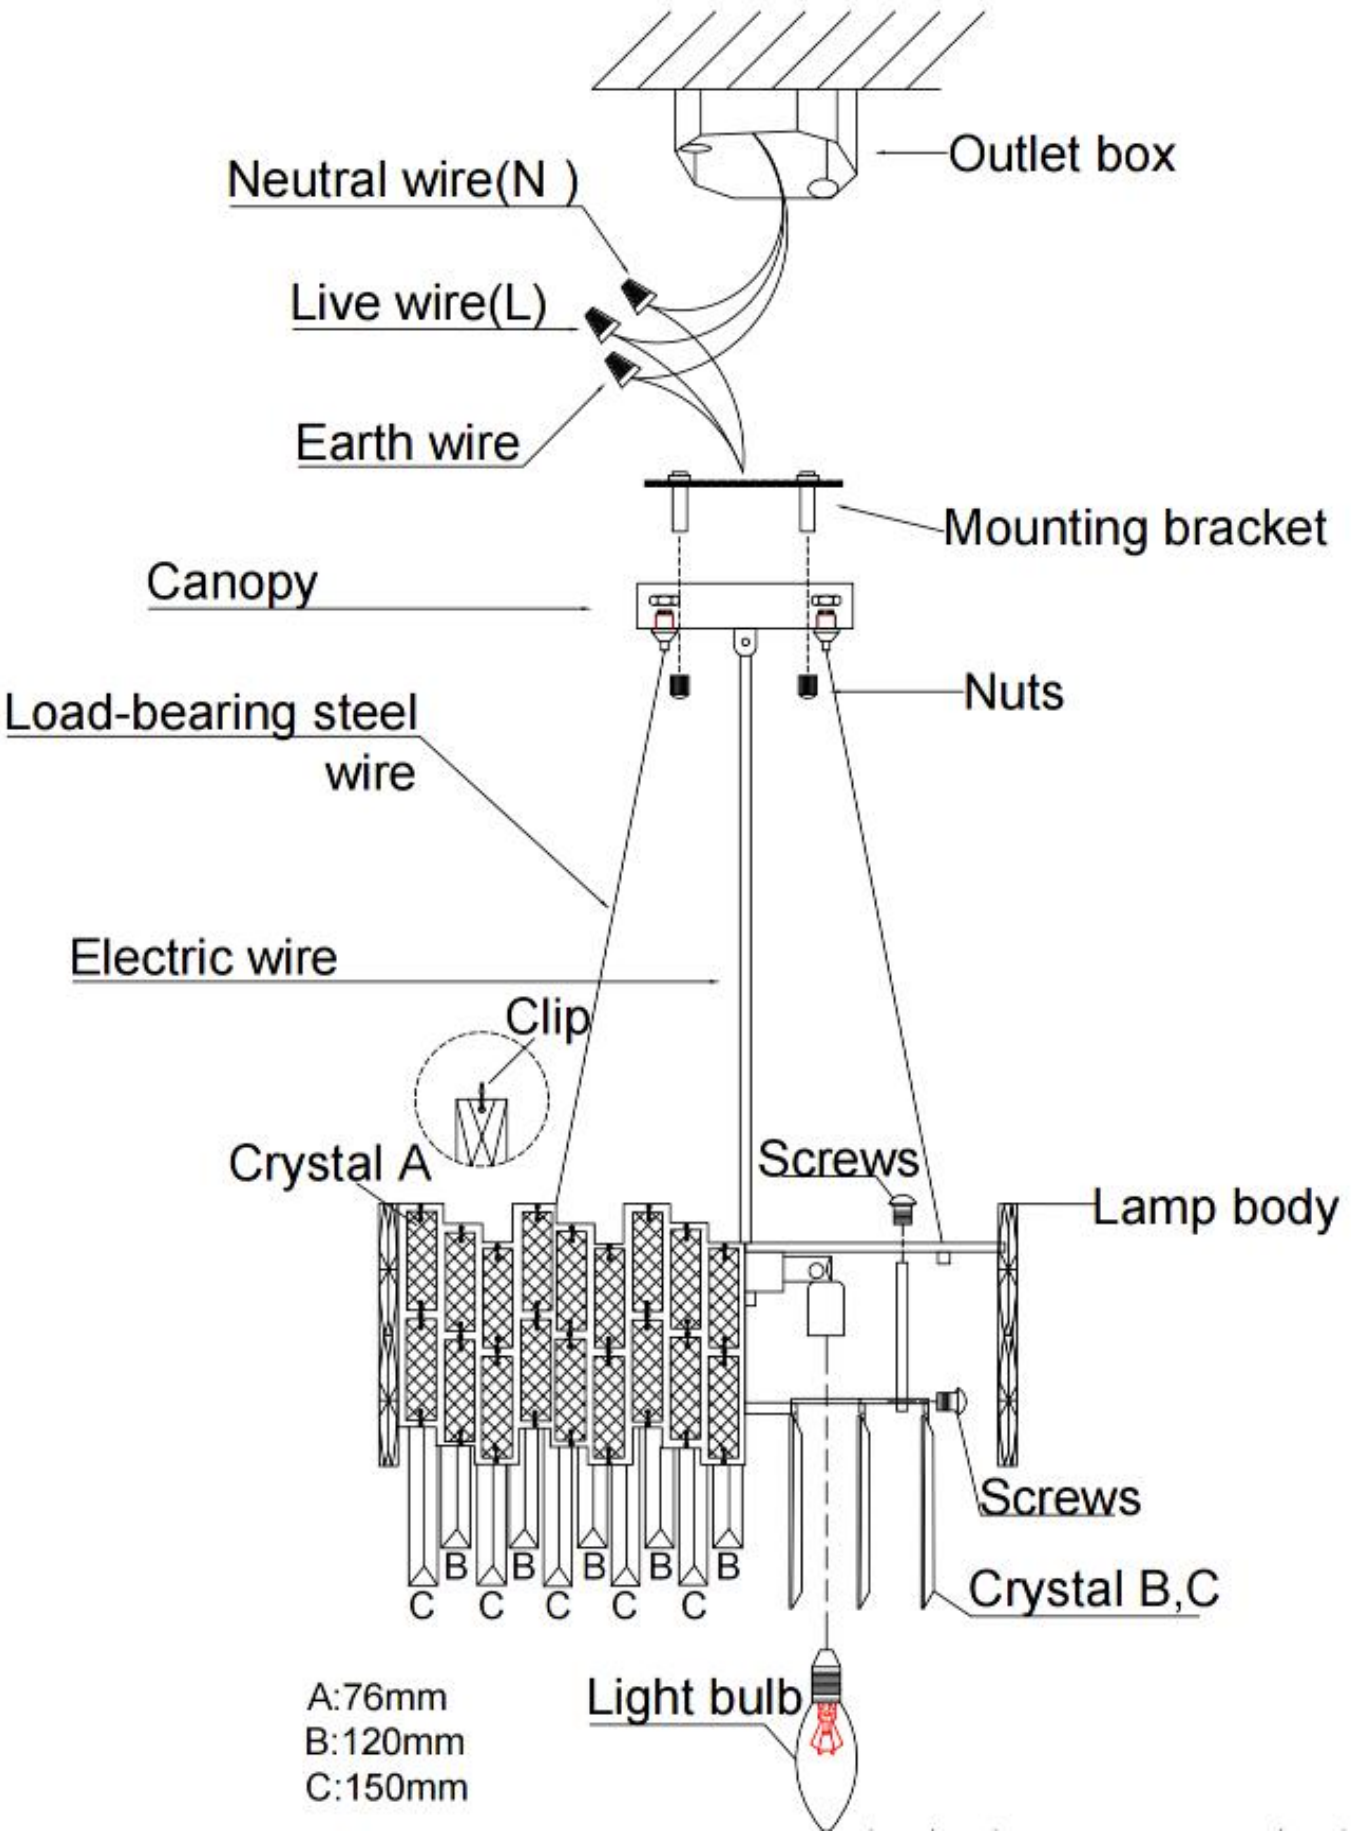
Outlet box
Neutral wire(N)
Live wire(L)
Earth wire
Mounting bracket
Canopy
Nuts
Load-bearing steel wire
Electric wire
Clip
Crystal A
Screws
Lamp body
Screws
Crystal B,C
B B B B B
C C C C C
Light bulb
A:76mm
B:120mm
C:150mm

Package List:

Lamp body	1	PCS
Crystal A	80	PCS
Crystal B	36	PCS
Crystal C	36	PCS
Load-bearing steel wire	3	PCS
11.42” Metal ring	1	PCS
4.33” Metal tube	3	PCS
Clips	1	BAG
Mounting bracket	1	PCS
Canopy	1	PCS
Accessories Bag	1	BAG
Installation Instructions	1	PCS

This product compatible with E12（US）/E14（EU） bulbs (Not included in the package).