


14 Remote Control Instruction

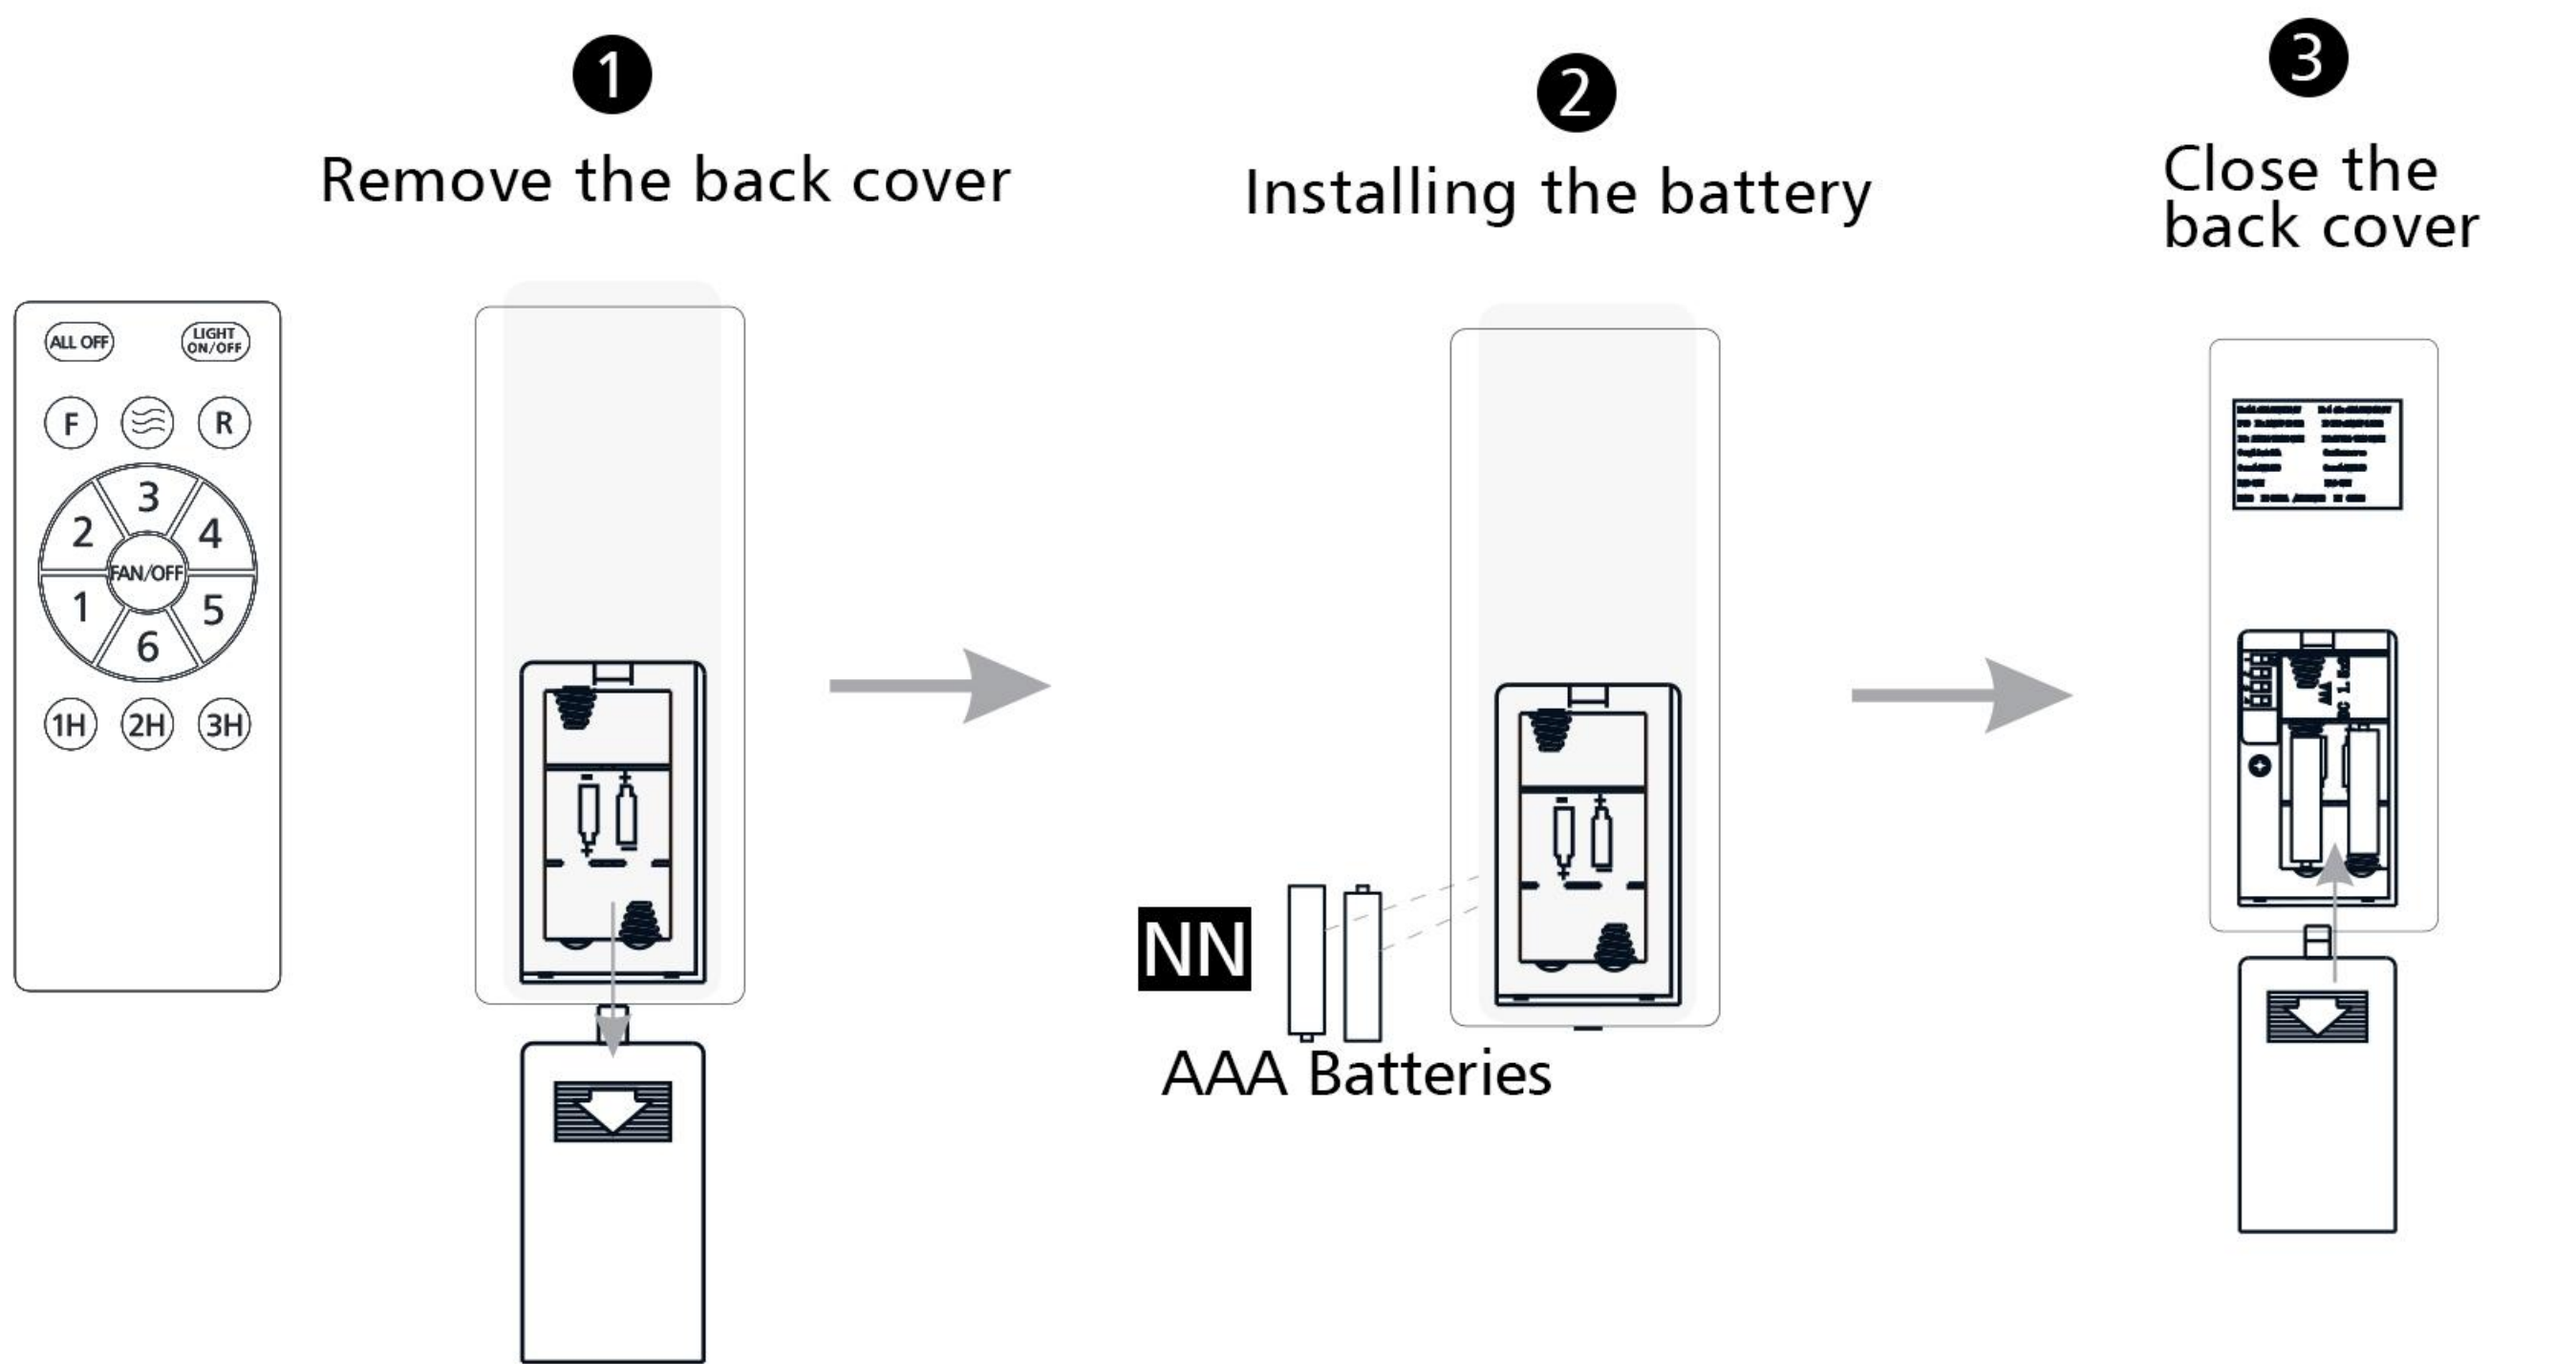

ALL OFF and pairing remote

Turn the light on or off

Fan rotates forward

Fan reverse rotation

The fan rotates from small to large, and then changes from large to small like natural wind

Free selection of wind speed

Fan stop

Timing of fan on or off

Remote Control Pairing Instructions:
(If the remote is not working, please refer to this method)

First, turn off the wall switch to completely cut power to the fan.
Then, turn the wall switch back on.
Within 3 seconds after turning the power back on, point the remote at the fan and press and hold the "ALL OFF" button (top left corner of the remote) for 3-5 seconds.
If the fan light flashes, the pairing is successful.

Your installation is now complete. Save this sheet for future

INSTALLATION GUIDE FOR MT60071

! WARNINGS AND CAUTIONS

Released Date:2024-12


READ AND SAVE THESE INSTRUCTIONS

Please read and understand this entire manual before attempting to assemble, install or operate the product.

- WARNING**
- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
 - RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.
 - RISK OF PERSONAL INJURY - DO NOT bend the blades when installing the fan, or cleaning the fan. Do not insert foreign objects in between rotating fan blades.
 - RISK OF FIRE, ELECTRIC SHOCK, OR PERSONAL INJURY - mount to outlet box marked and use mounting screws provided with the outlet box.
 - All set screws must be checked, and re-tightened where necessary, before installation.
 - After making the wire connections, the wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box and the ungrounded conductor on the other side of the outlet box.
 - This unit weights 3.6kg(7.92 lbs).

- CAUTION**
- For your safety, read instructions completely before beginning installation.
 - If in doubt about electrical installation, consult a licensed electrician.
 - Disconnect fixture from the power source before replacing bulbs or cleaning. Make sure the bulbs are given sufficient time to cool be before removing.

TOOLS REQUIRED

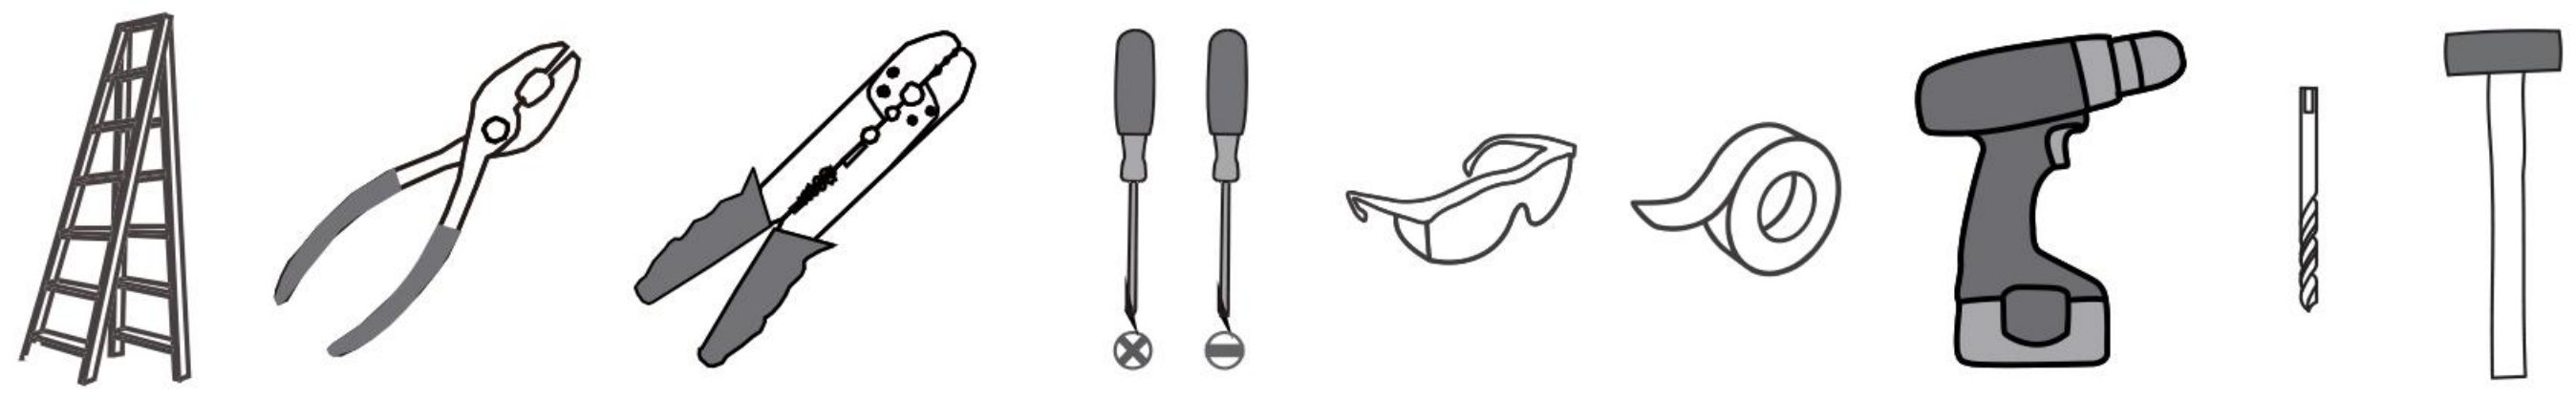


CARE AND MAINTENANCE

- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.


If you need further assistance contact our After Customer Care at **betteraftersaleservice01@outlook.com**, we will reply you in 24 hours.

PACKAGE CONTENTS

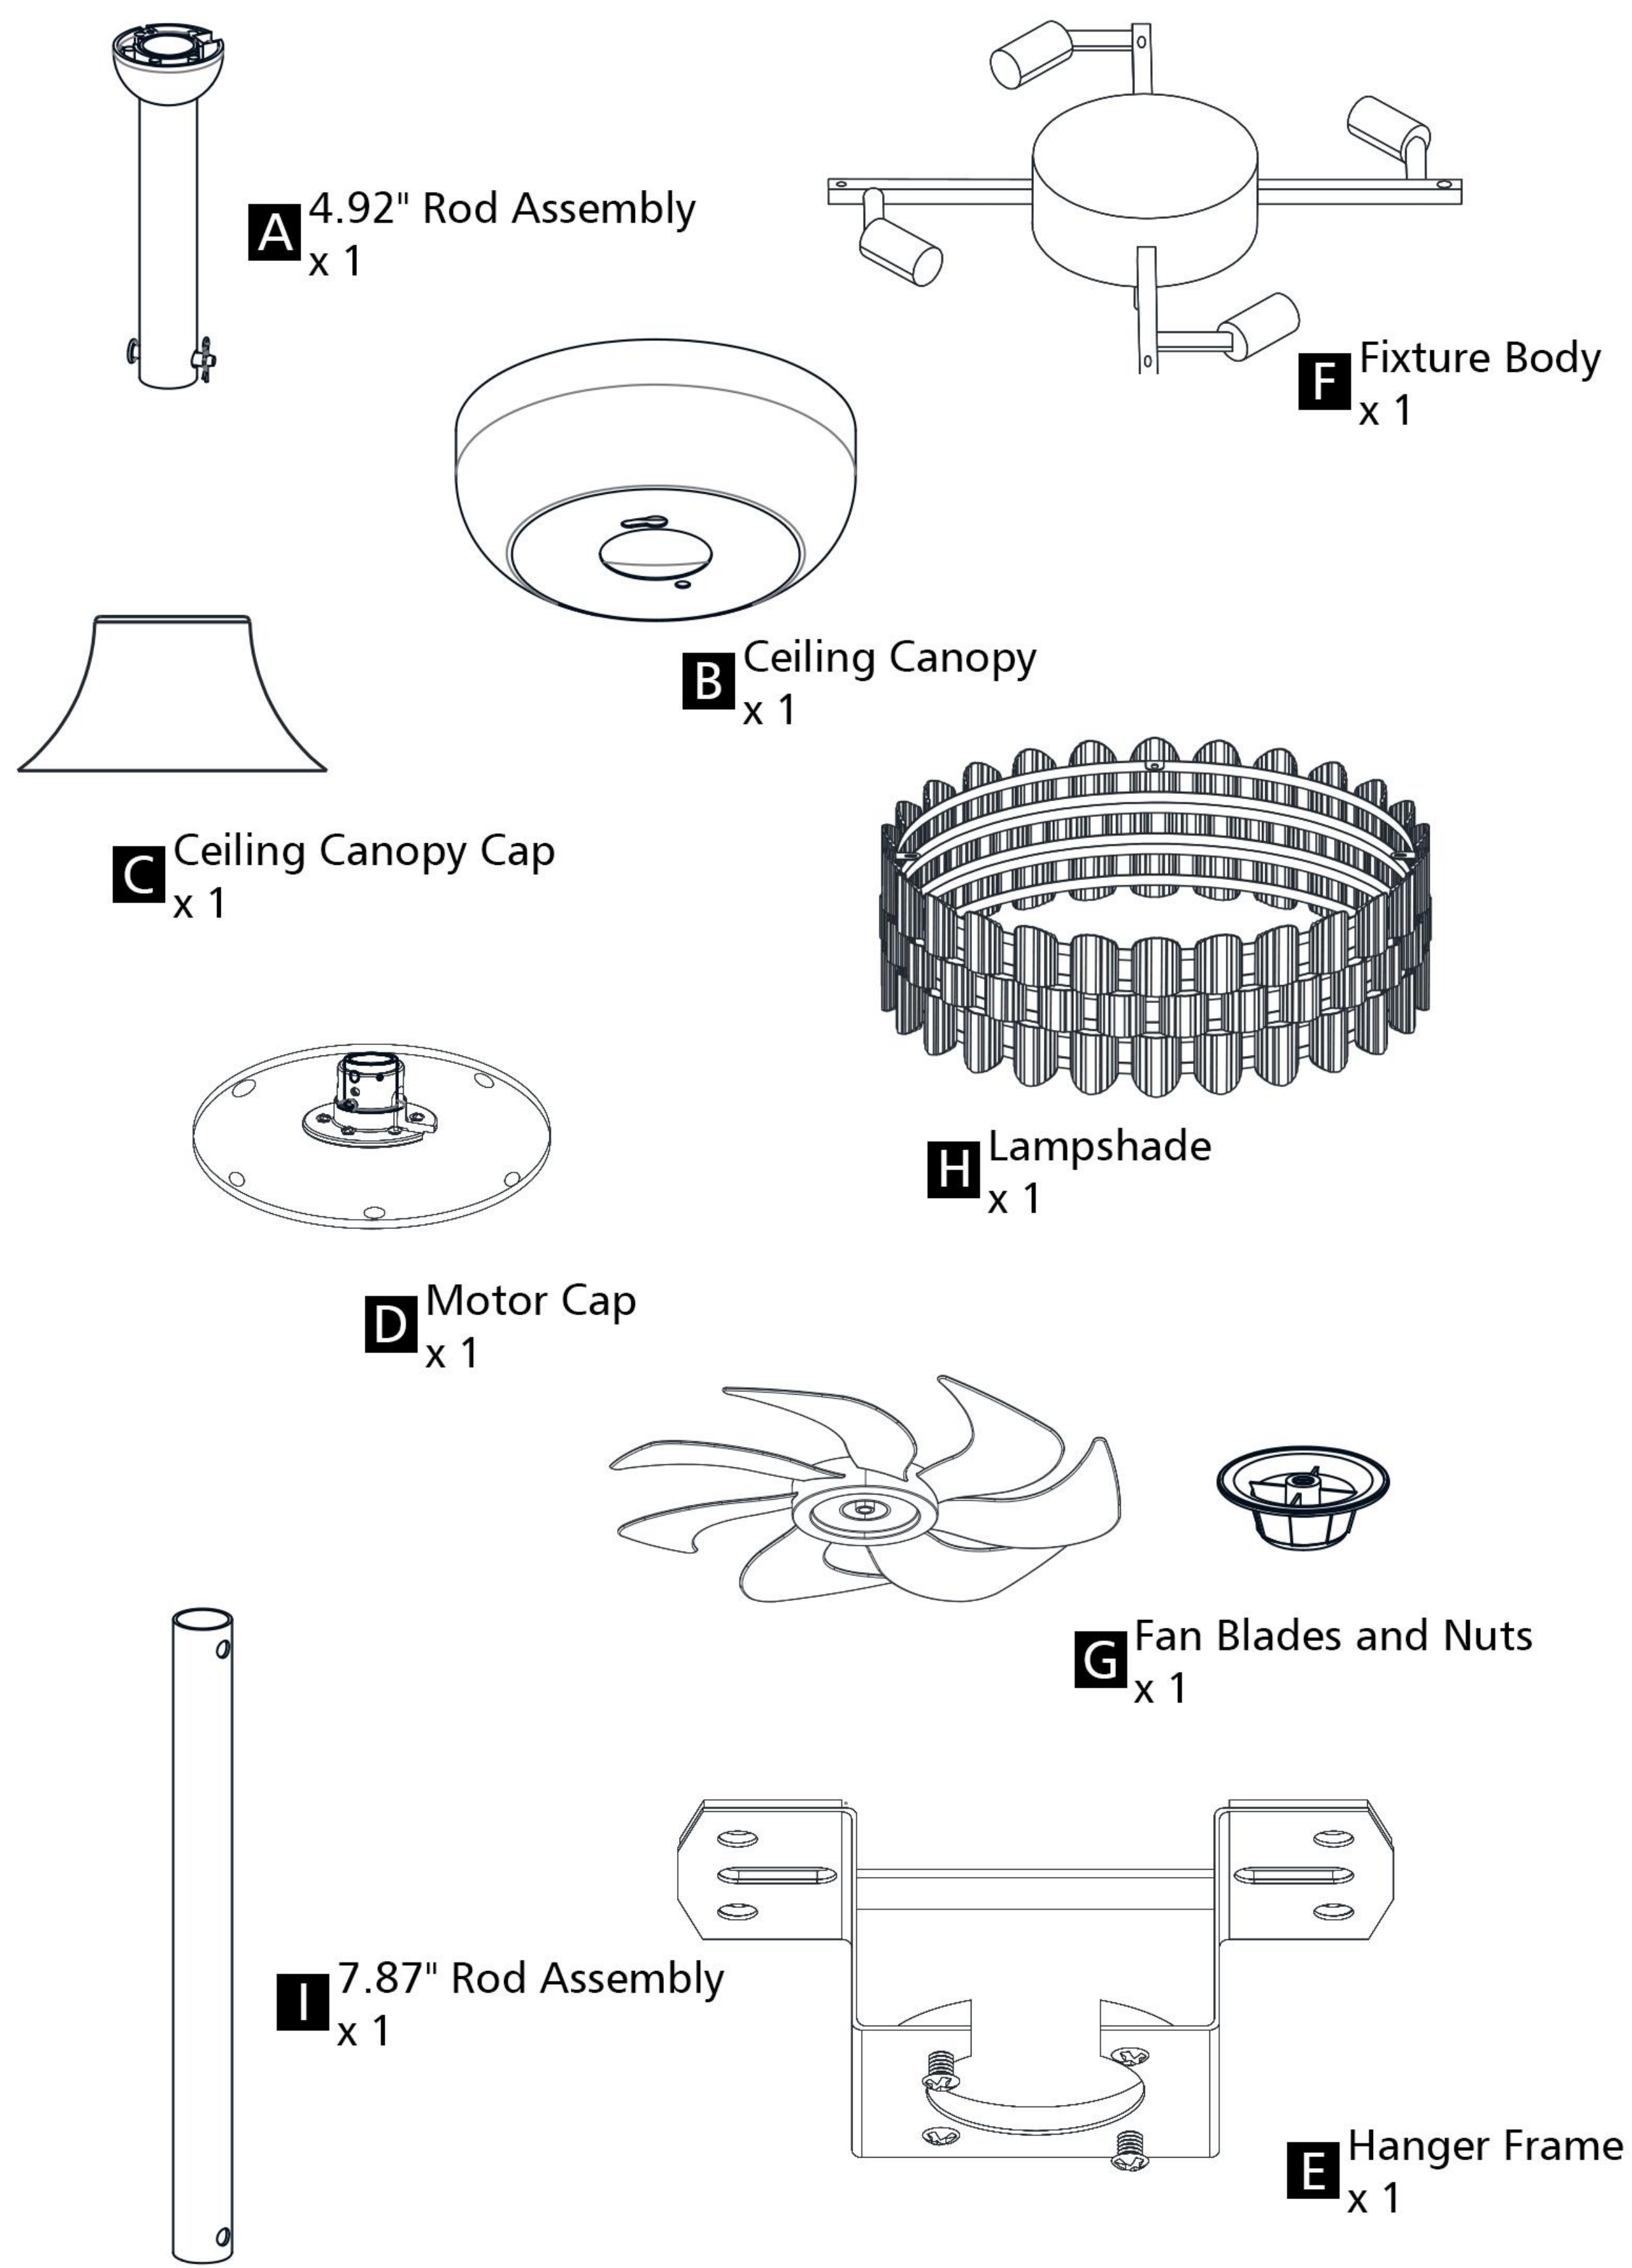


INSTALLATION

13 Install Wall Bracket

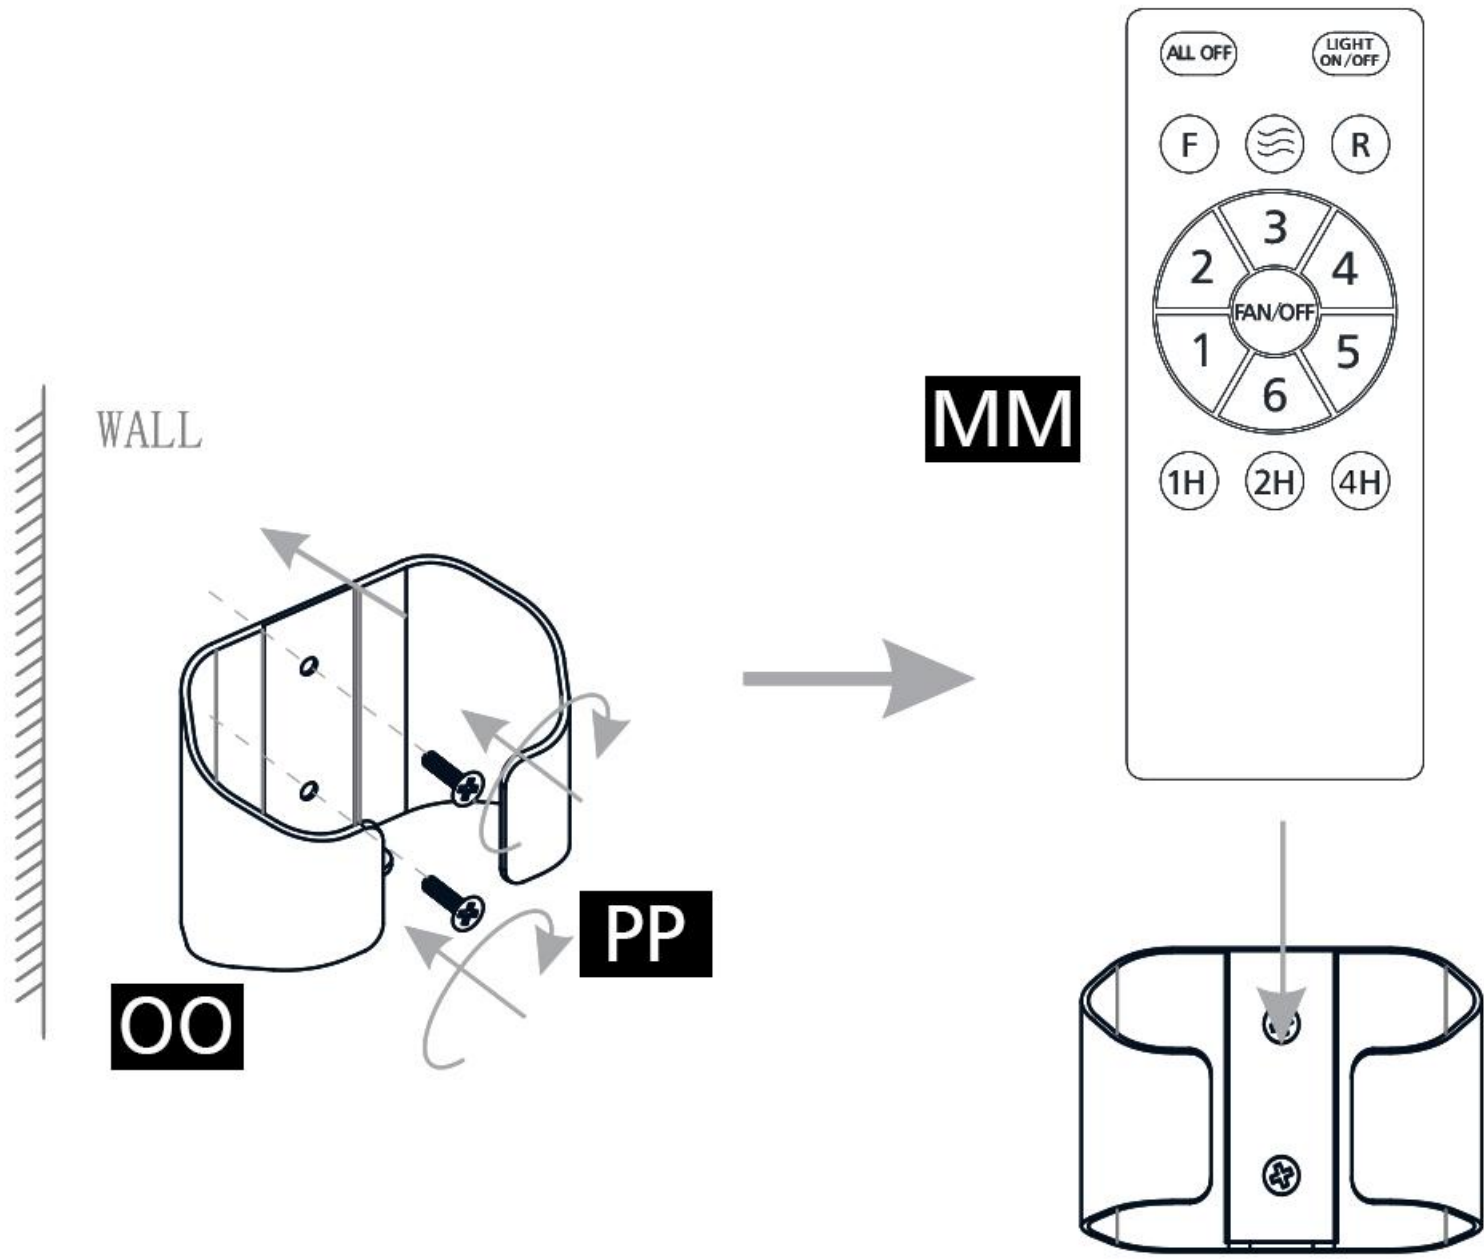

INSTALLATION


11 Wiring

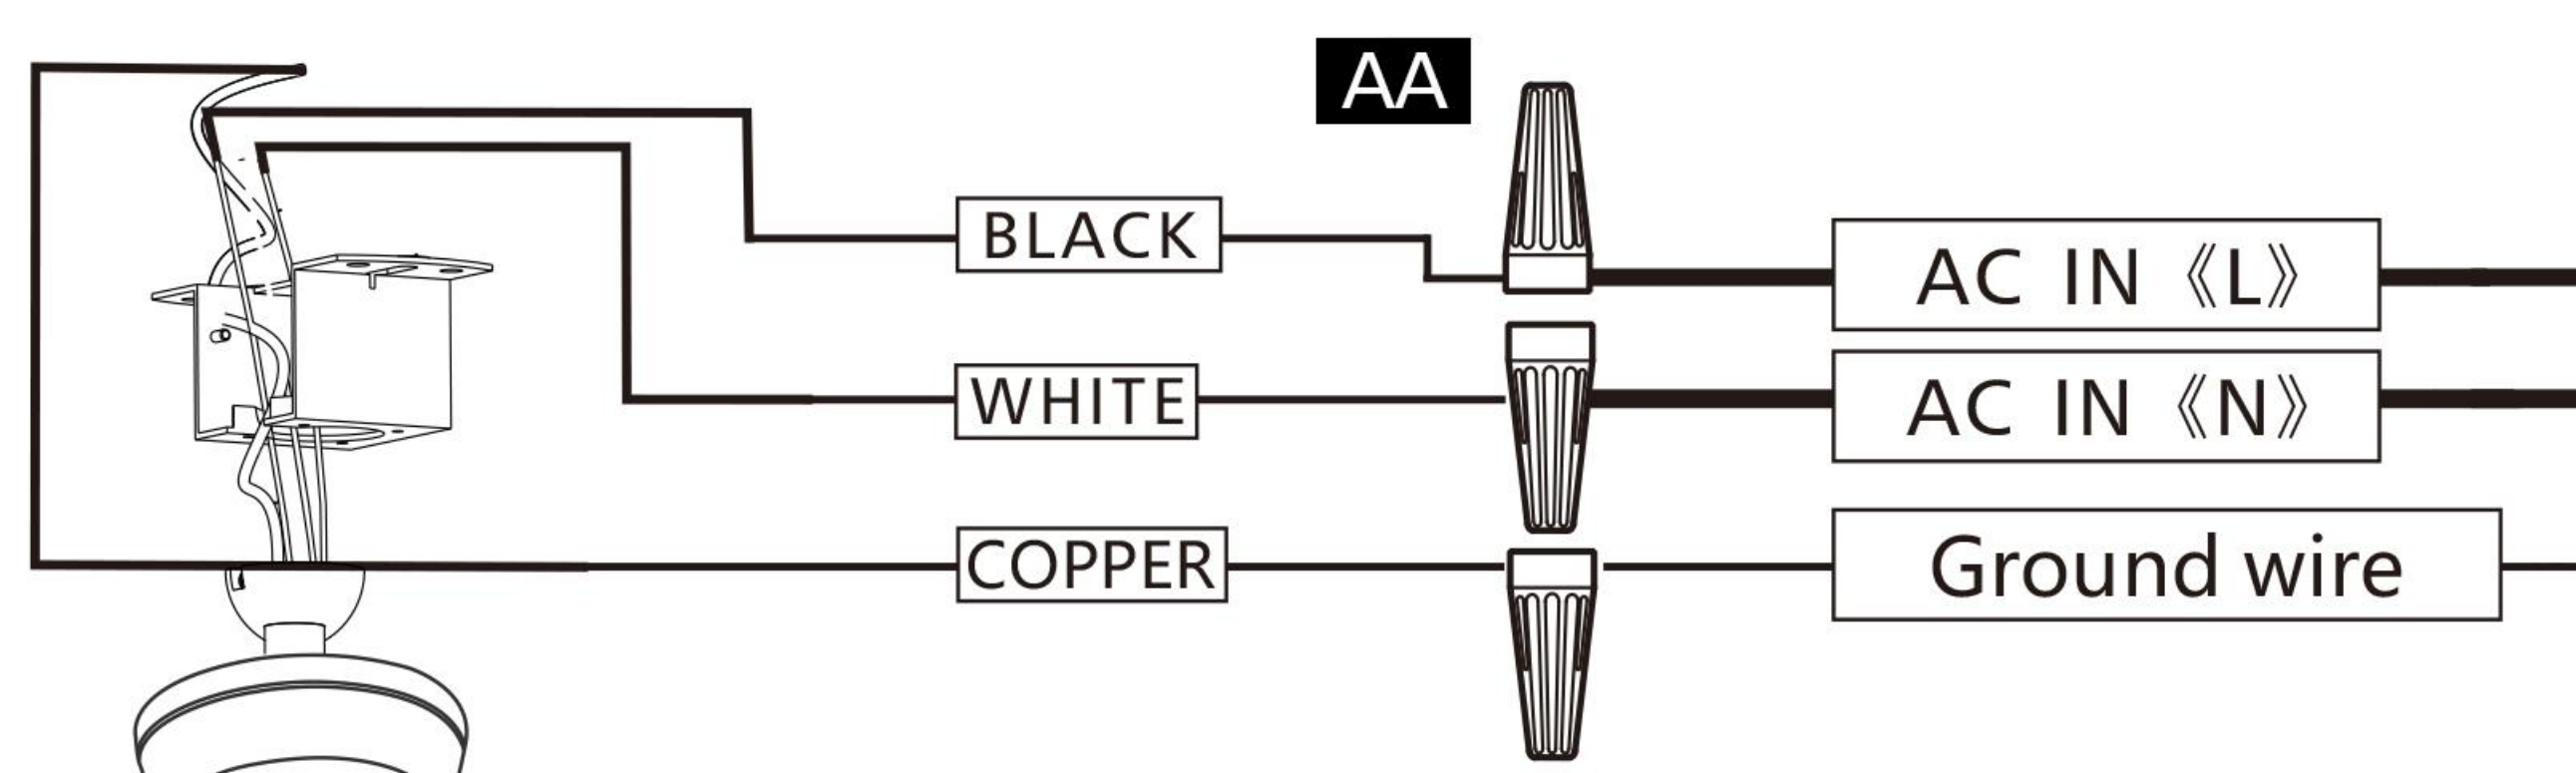


1. Connect the black wire to the live wire
2. Connect the white wire to the neutral wire
3. Connecting ground






12 Install Ceiling Canopy

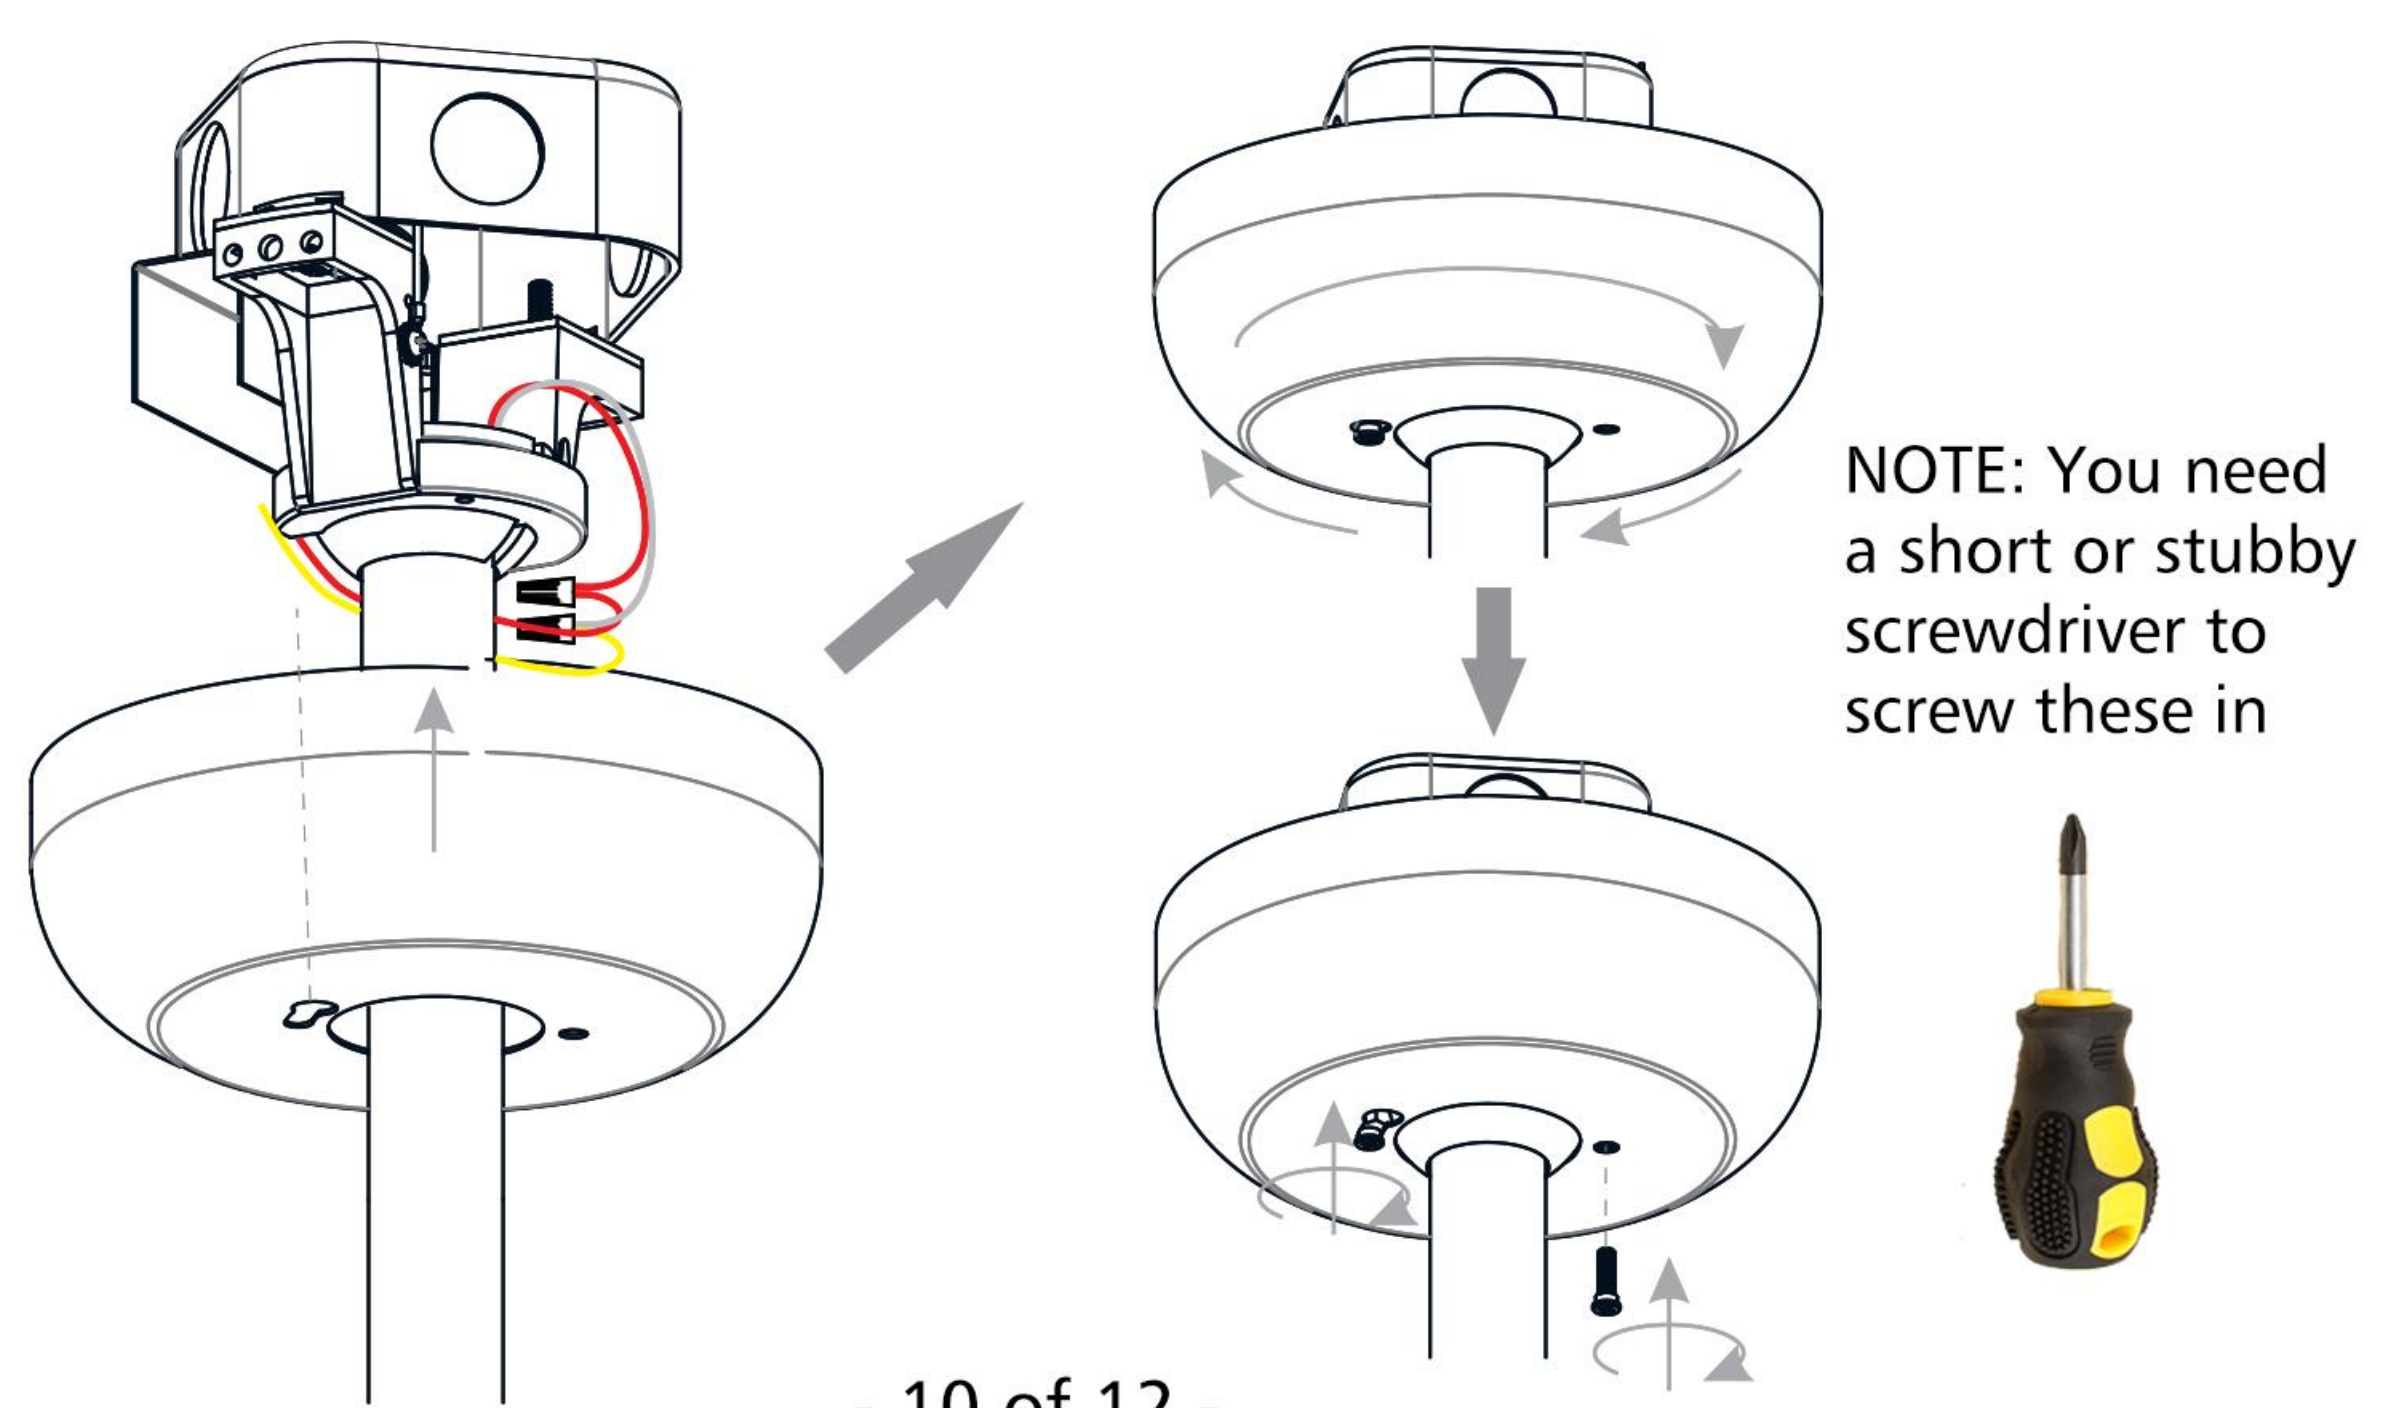Carefully tuck all wires inside of the ceiling canopy during installation.



PACKAGE CONTENTS (PARTS BAG 1)

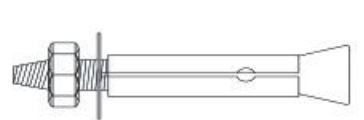



 NOTE: Hardware not shown to actual size.

- | | |
|---|---|
|  AA Wire Connector
x 4 |  DD Anchor Bolt
x 2 |
|  BB Screw
x 4 |  EE Mechanical Screw
x 2 |
|  CC Wall Anchor
x 4 | |

PACKAGE CONTENTS (PARTS BAG 2)


- | | | | |
|---|---|---|---|
|  FF M4 Hex Nut
x 5 |  GG Washer
x 5 |  HH M4 Screw
x 5 |  JJ M4 Cap Nut
x 5 |
|---|---|---|---|

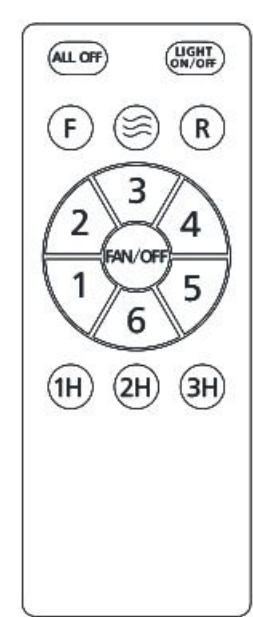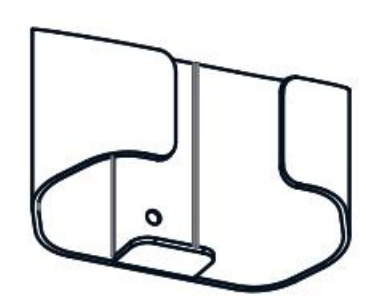PACKAGE CONTENTS (PARTS BAG 3)


- | | | | |
|---|---|--|--|
|  MM Remote Control
x 1 |  OO Wall Bracket
x 1 |  PP Screw
x 2 |  NN AAA Batteries
x 2 |
|---|---|--|--|

INSTALLATION


1 Choose Suitable Downrod

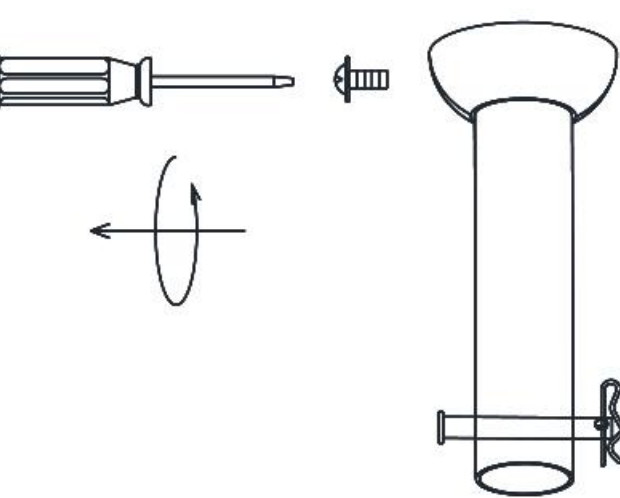


1 Remove the screws from the downrod hanger ball

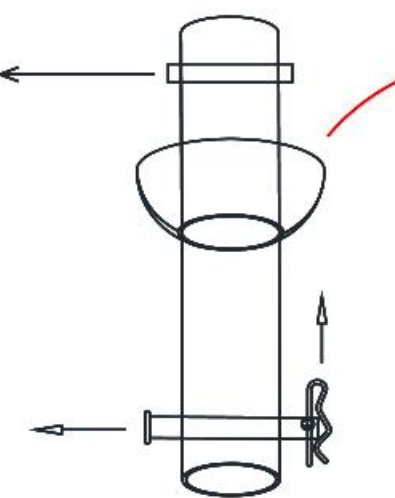


2 Remove pin from downrod

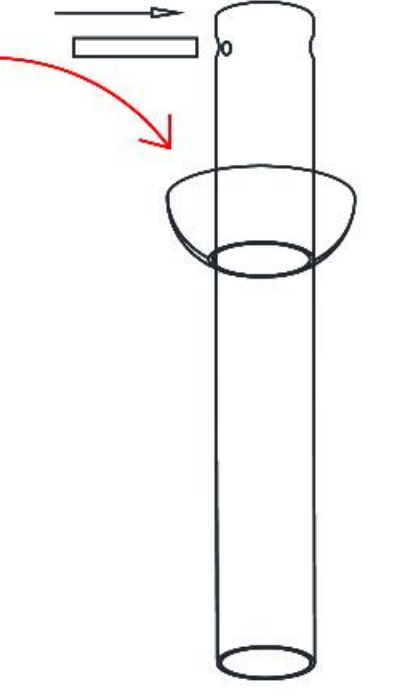

3 Attaching the hanger ball to the Long downrod

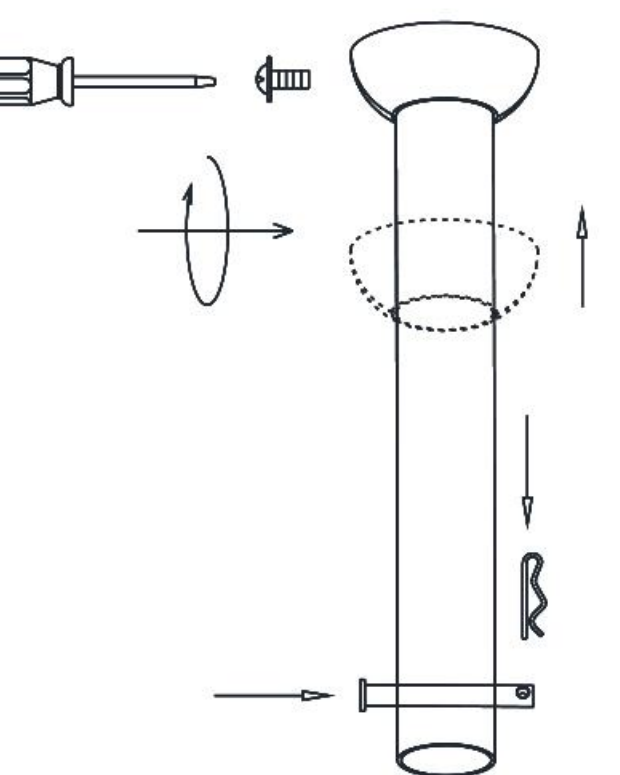


4 Move all the pins from the short downrod to the long downrod

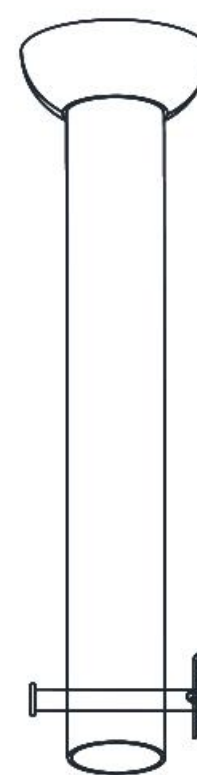


5 Finish


2 Install Downrod to Fixture Body

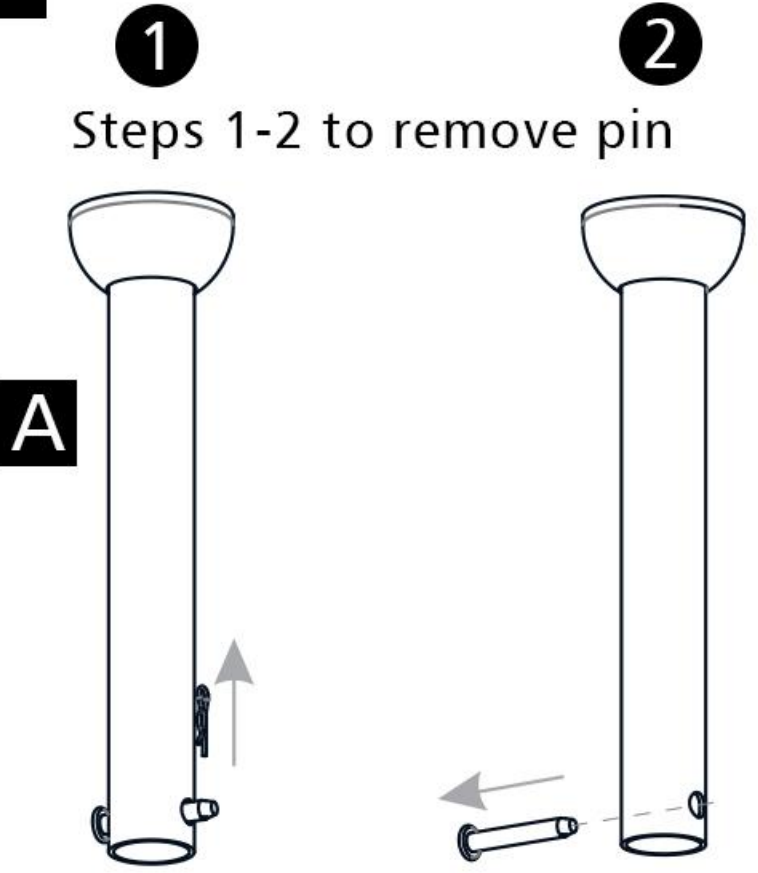


A Steps 1-2 to remove pin

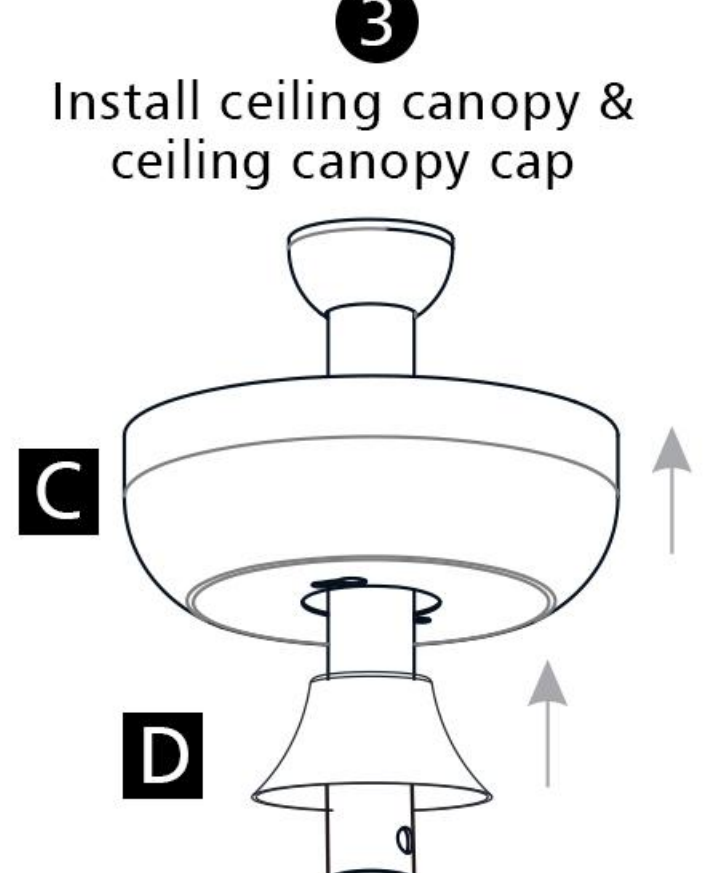


C Install ceiling canopy & ceiling canopy cap

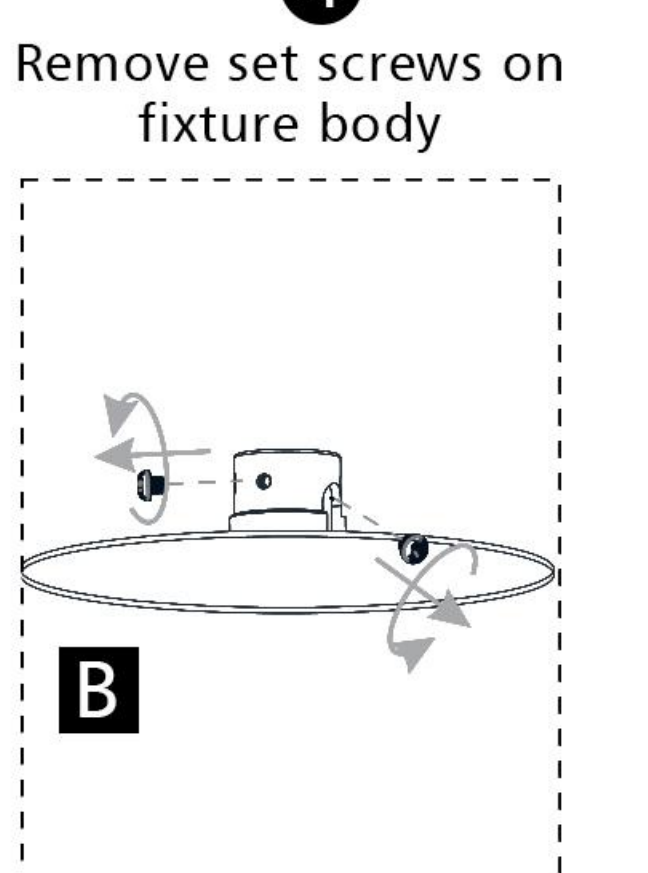


B Remove set screws on fixture body

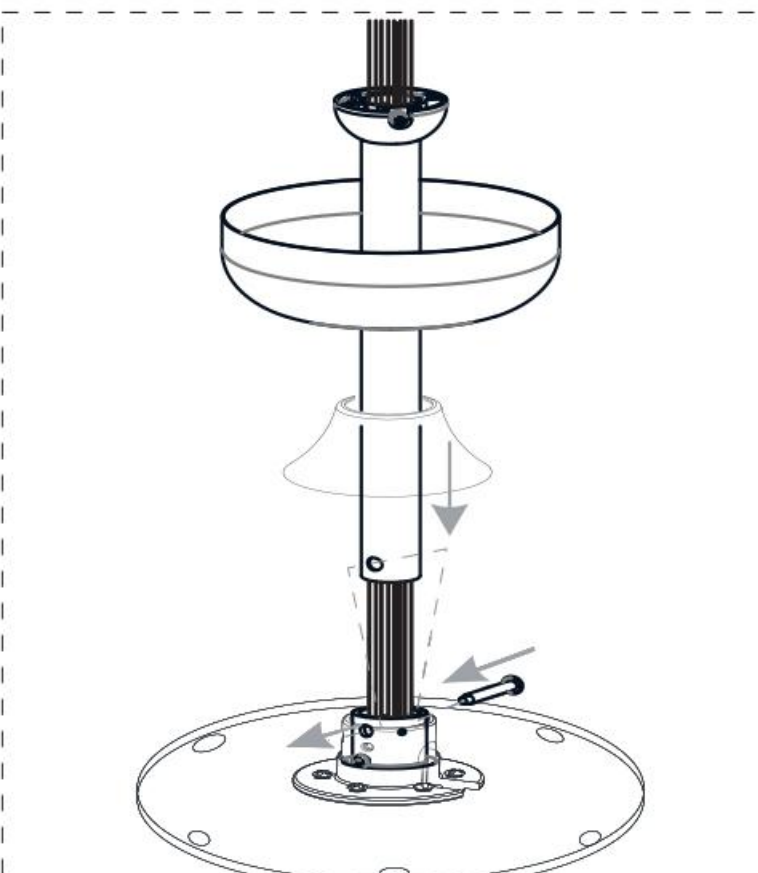

D Install rod

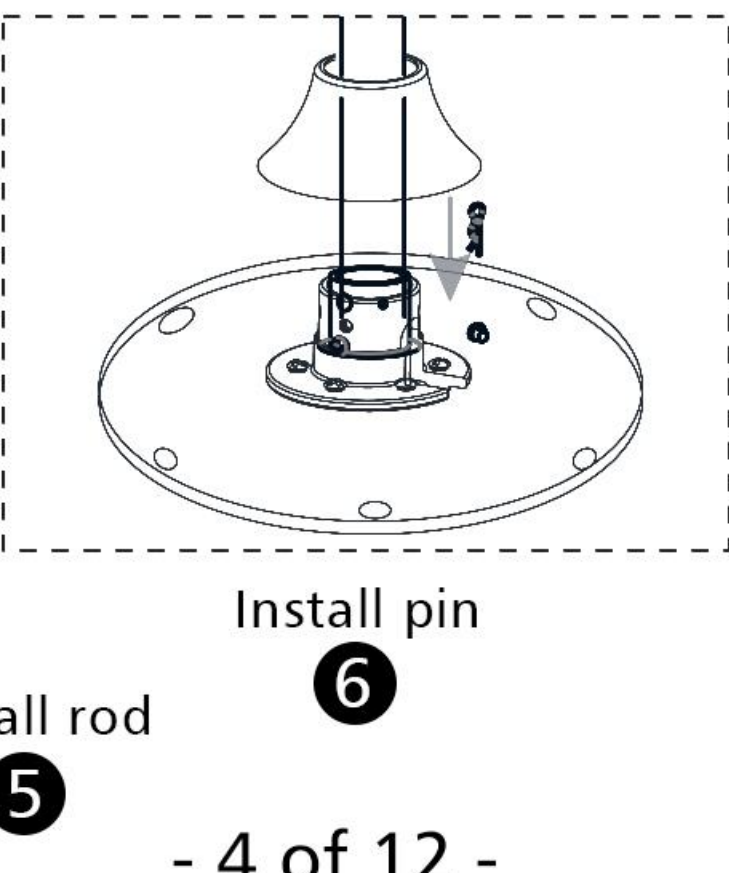


6 Install pin

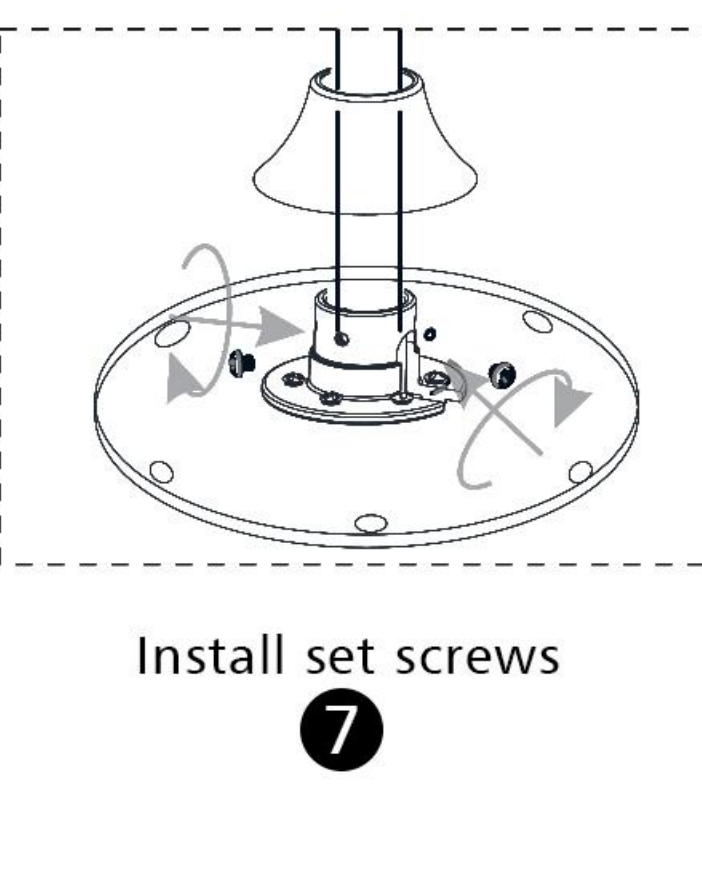


7 Install set screws

INSTALLATION

9 Install Hanger Frame

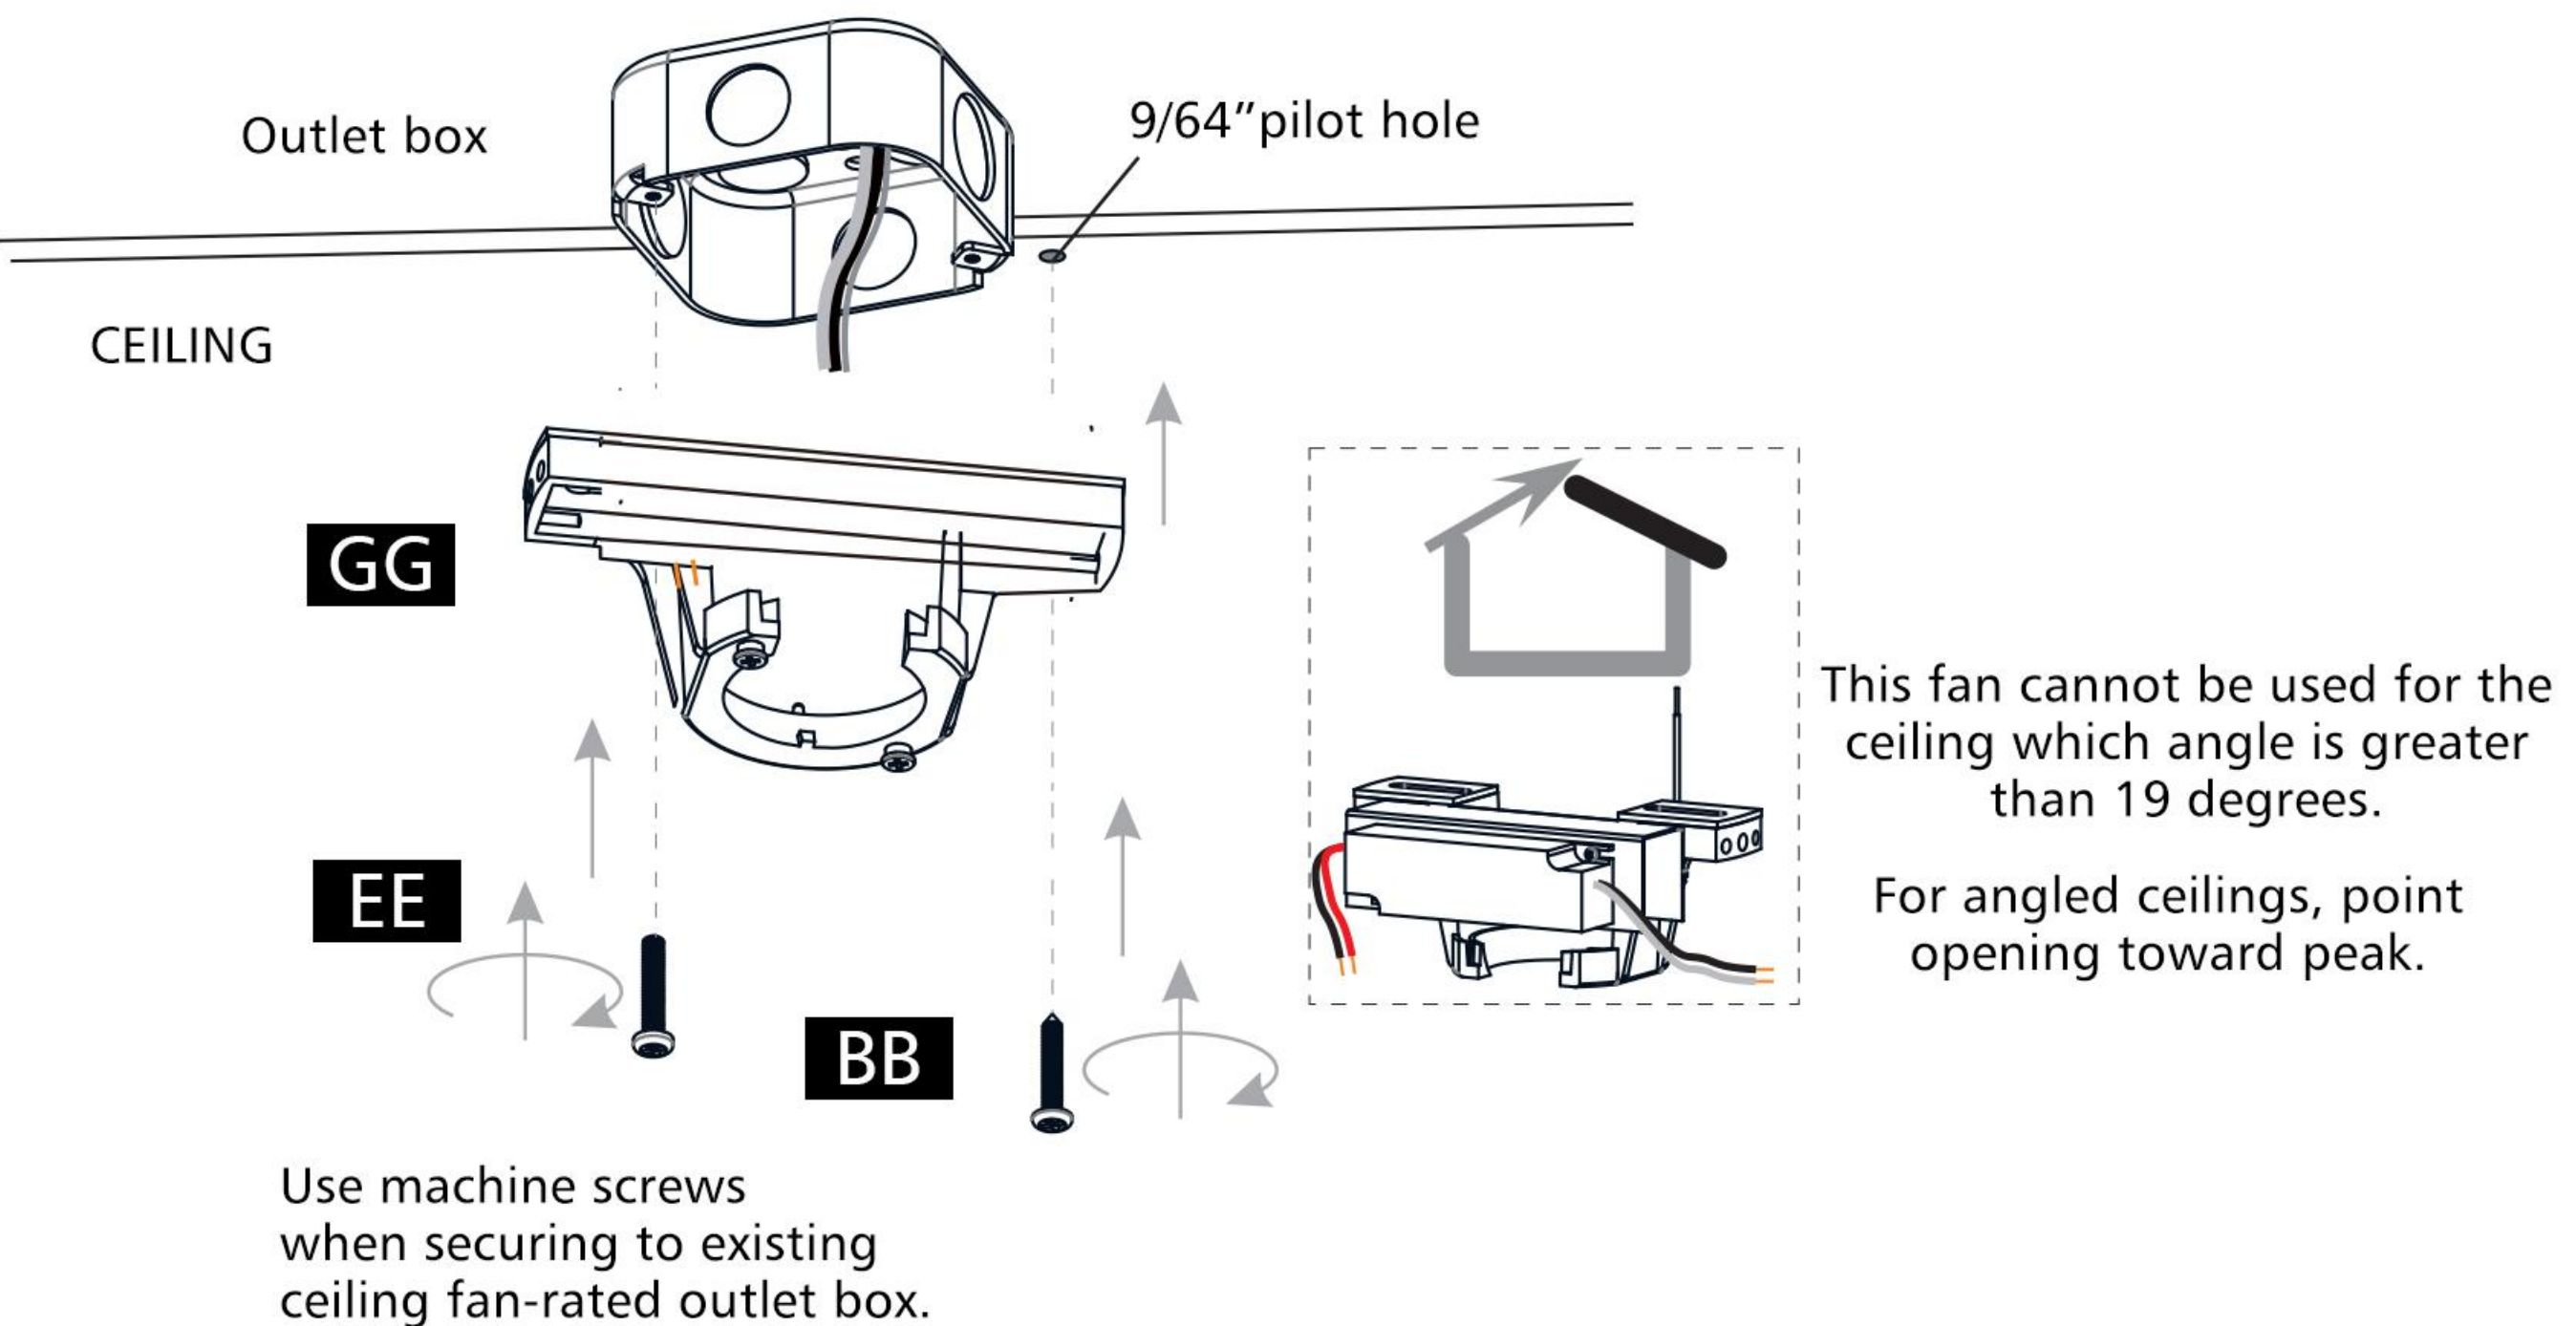


10 Loosen Shoulder Screws

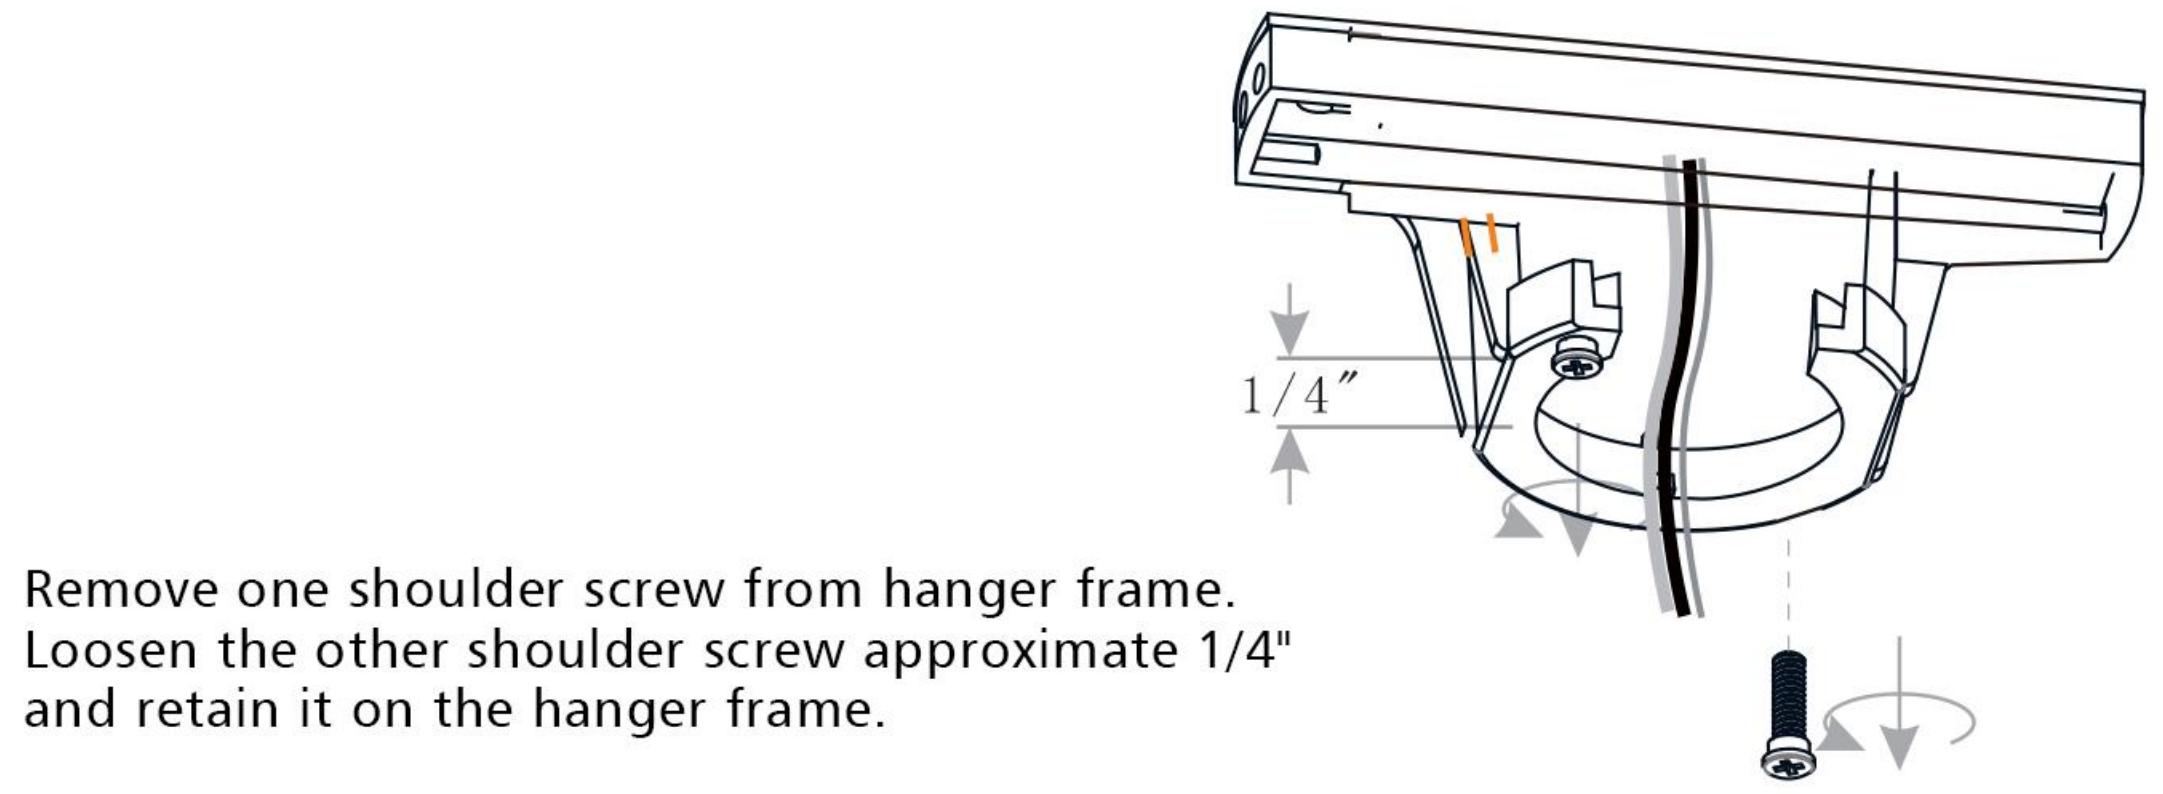


INSTALLATION

8 Install Fan Blade

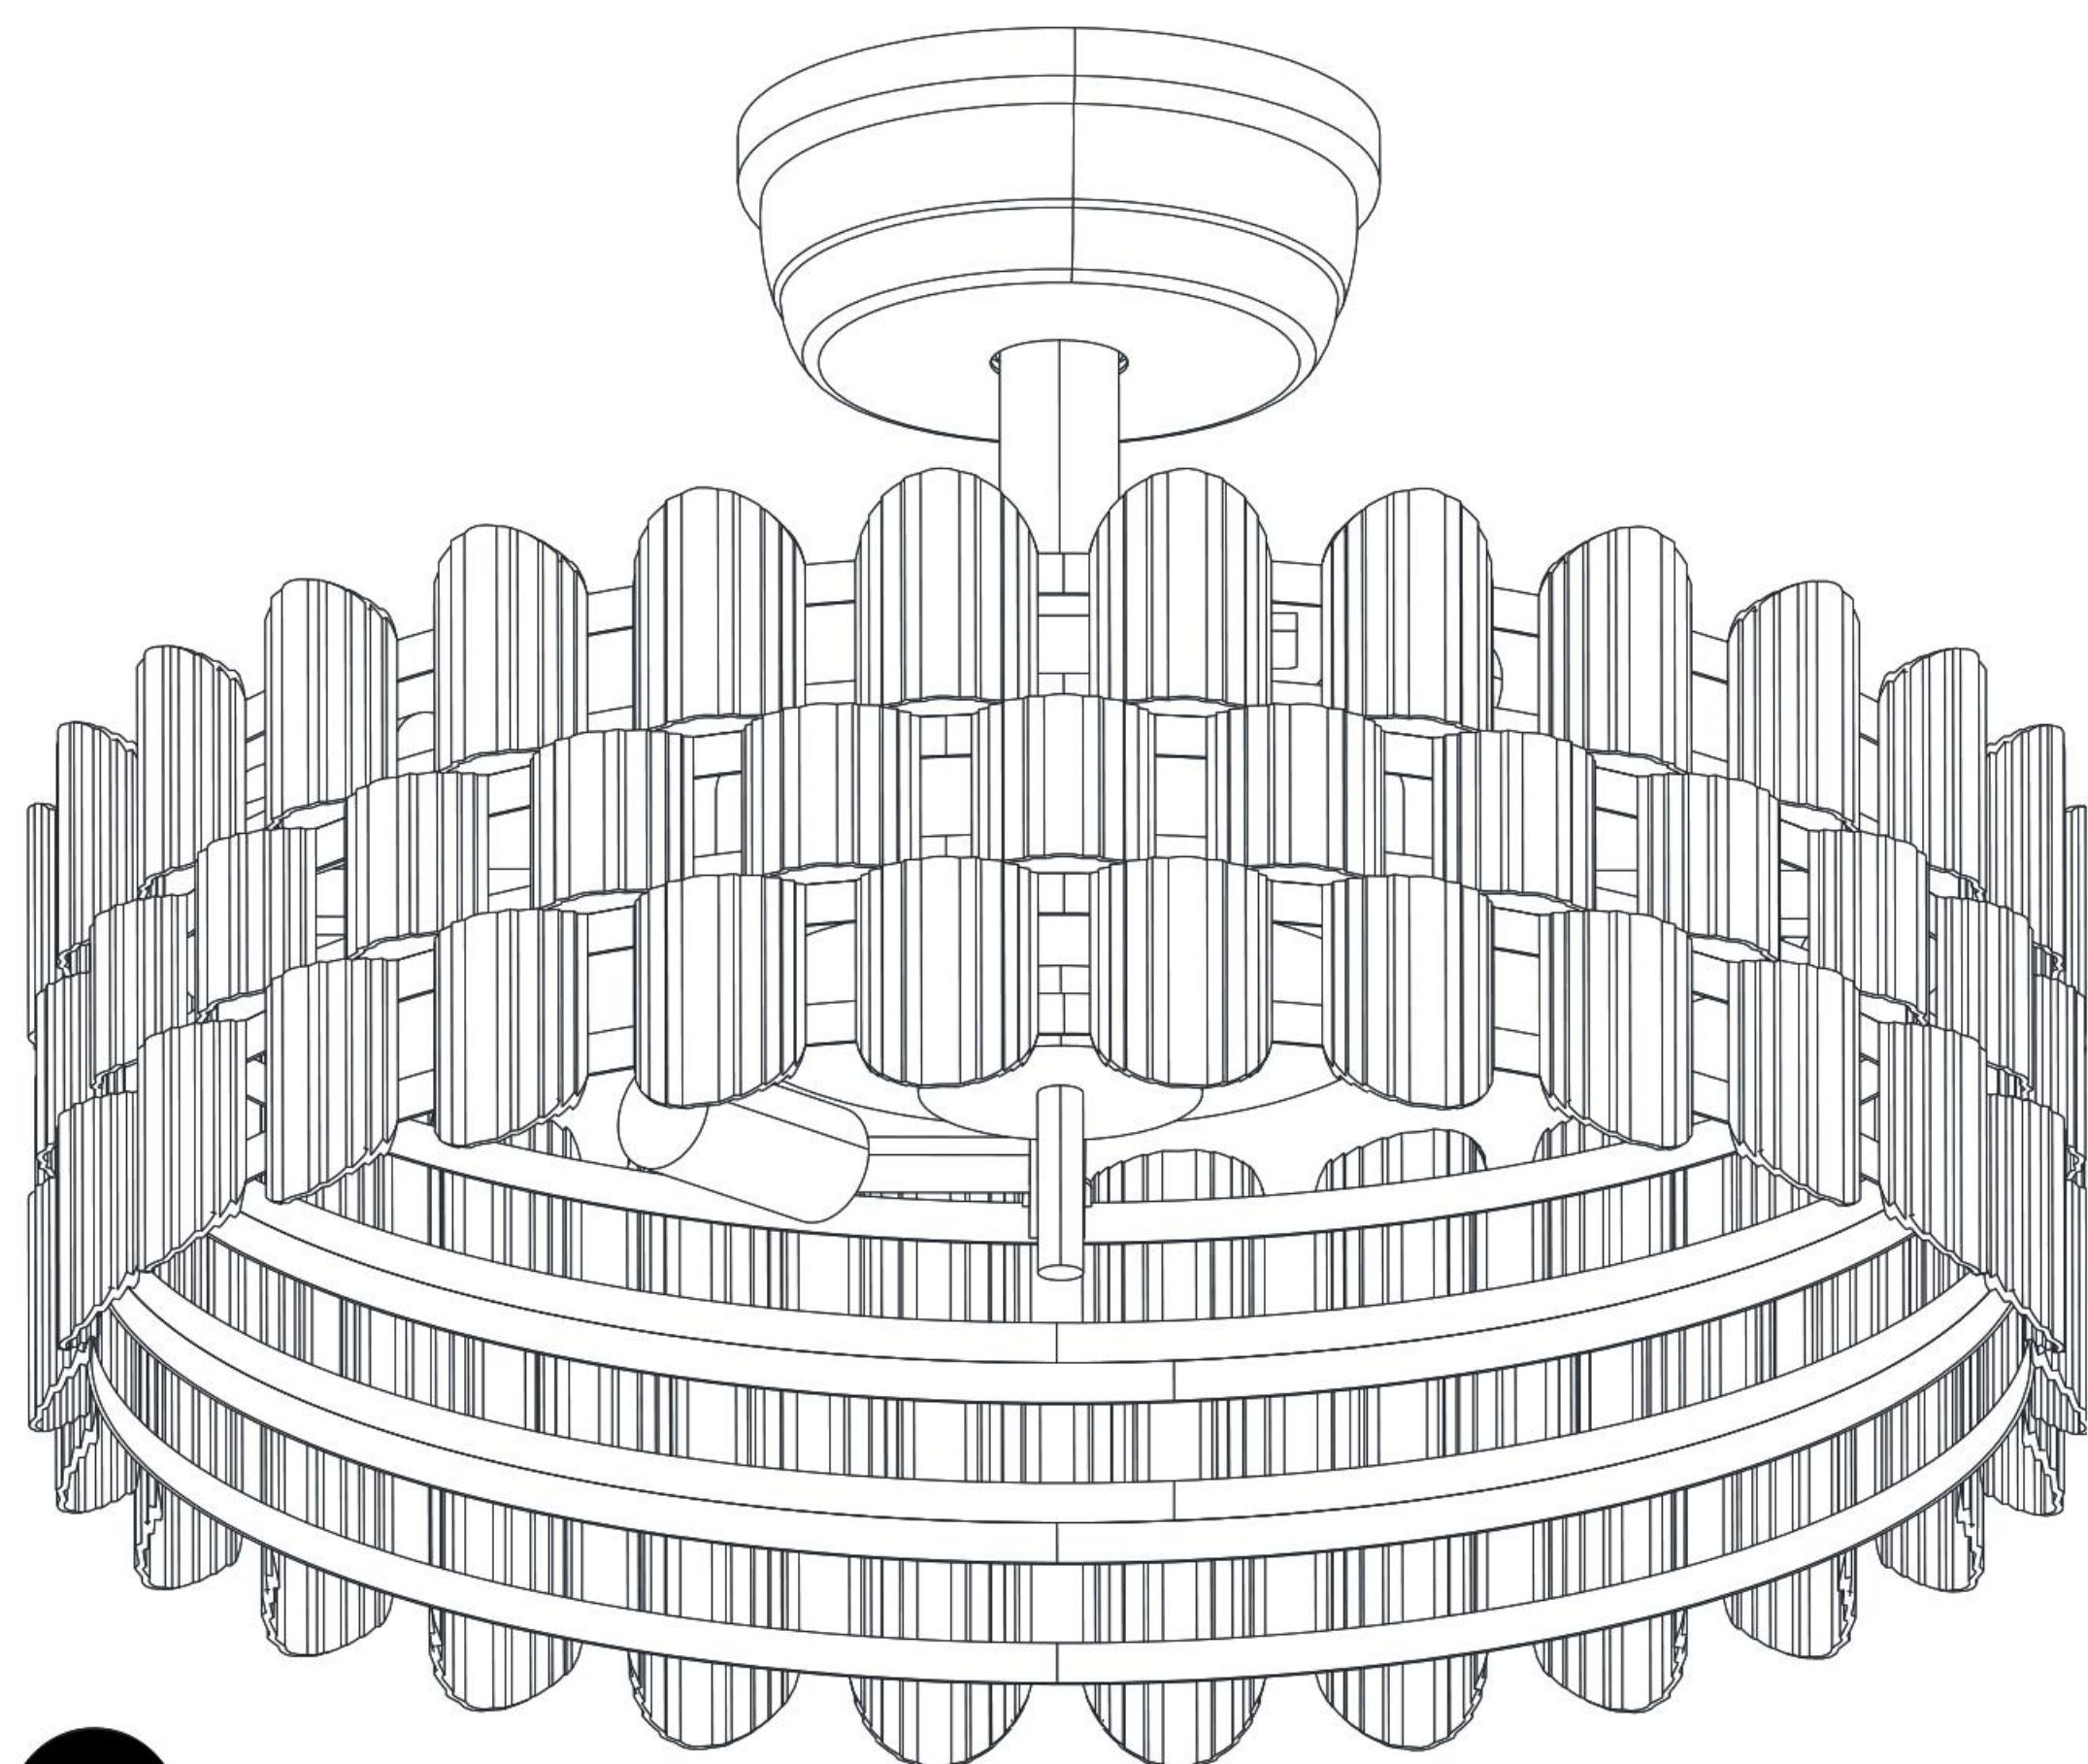

1

2

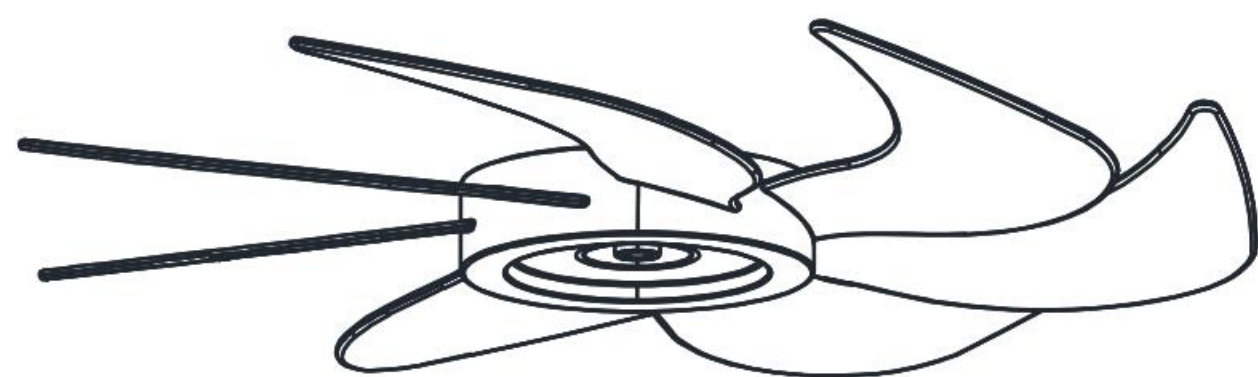


3




INSTALLATION

3 Install Lampshade

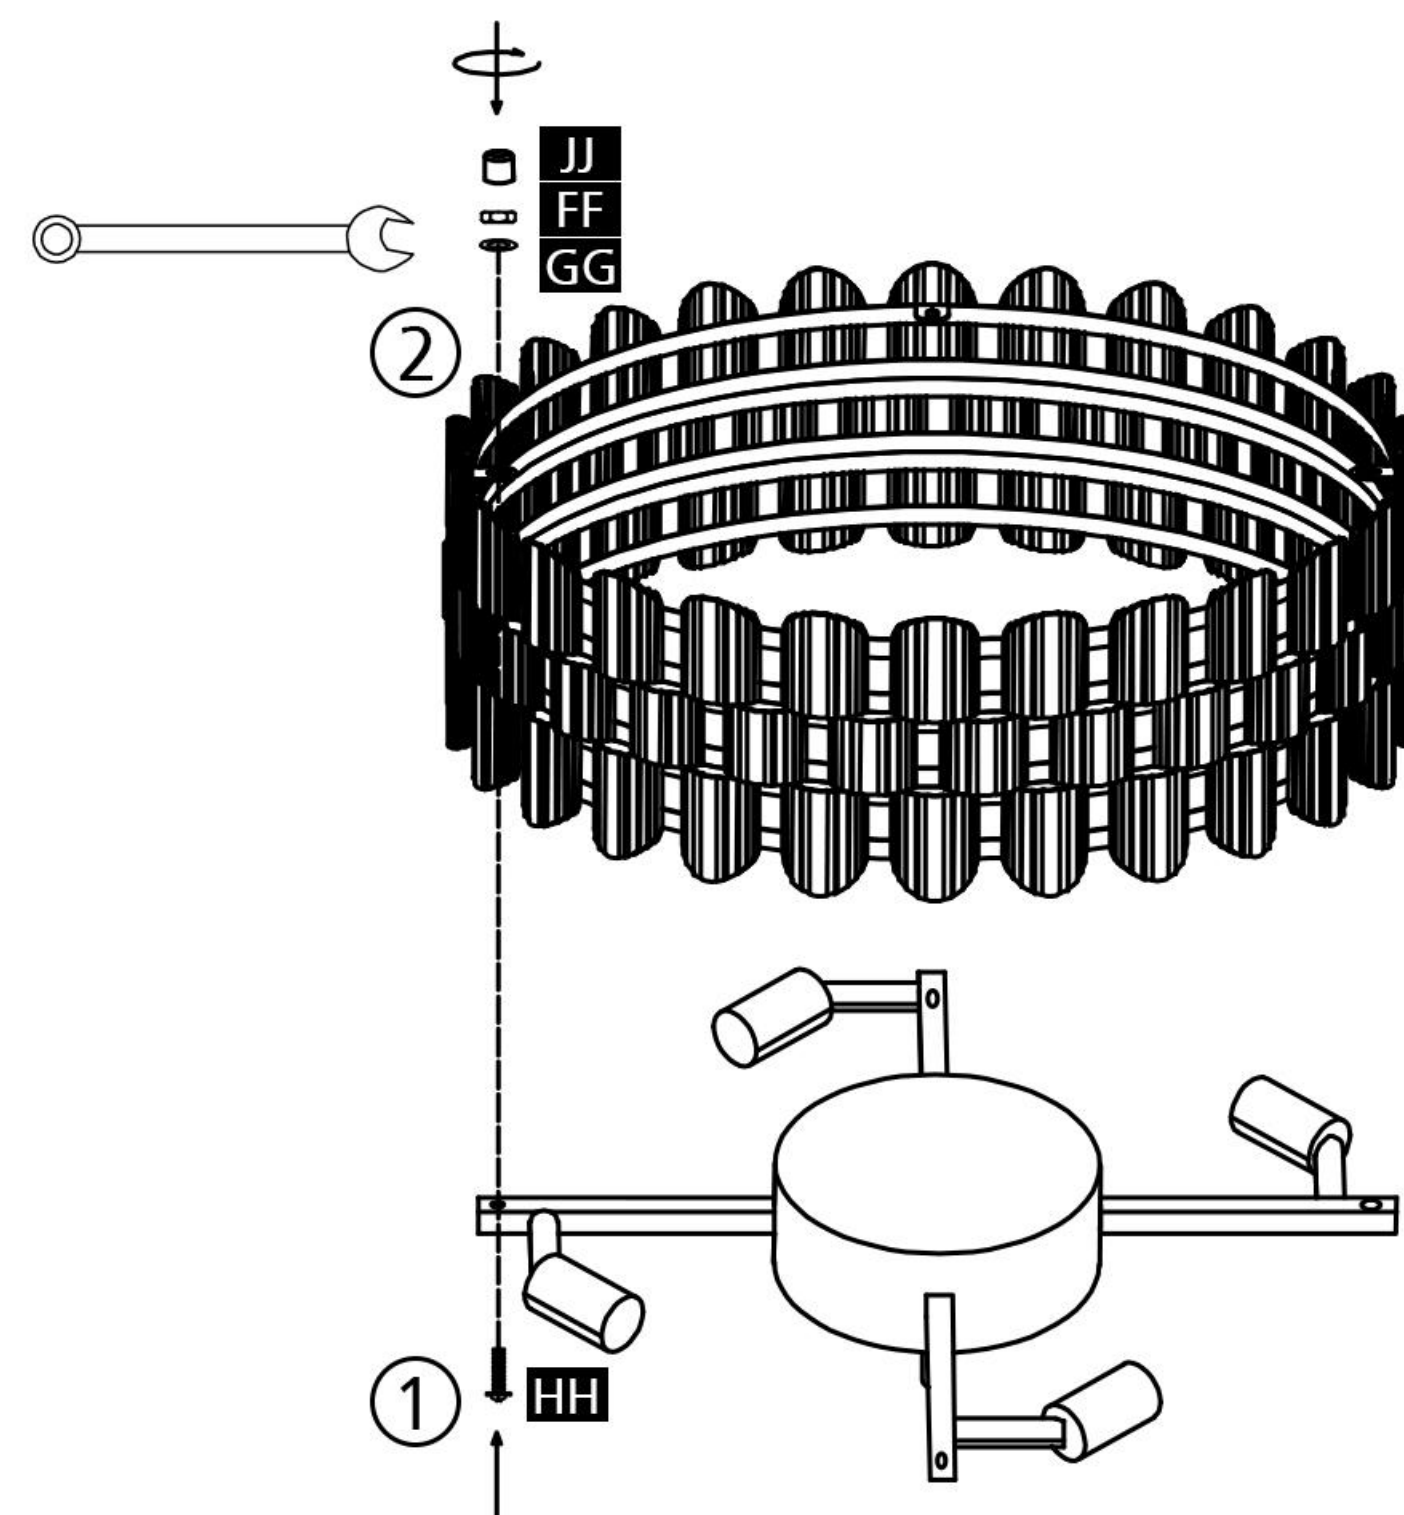


4 Remove the set screws on the fixture body

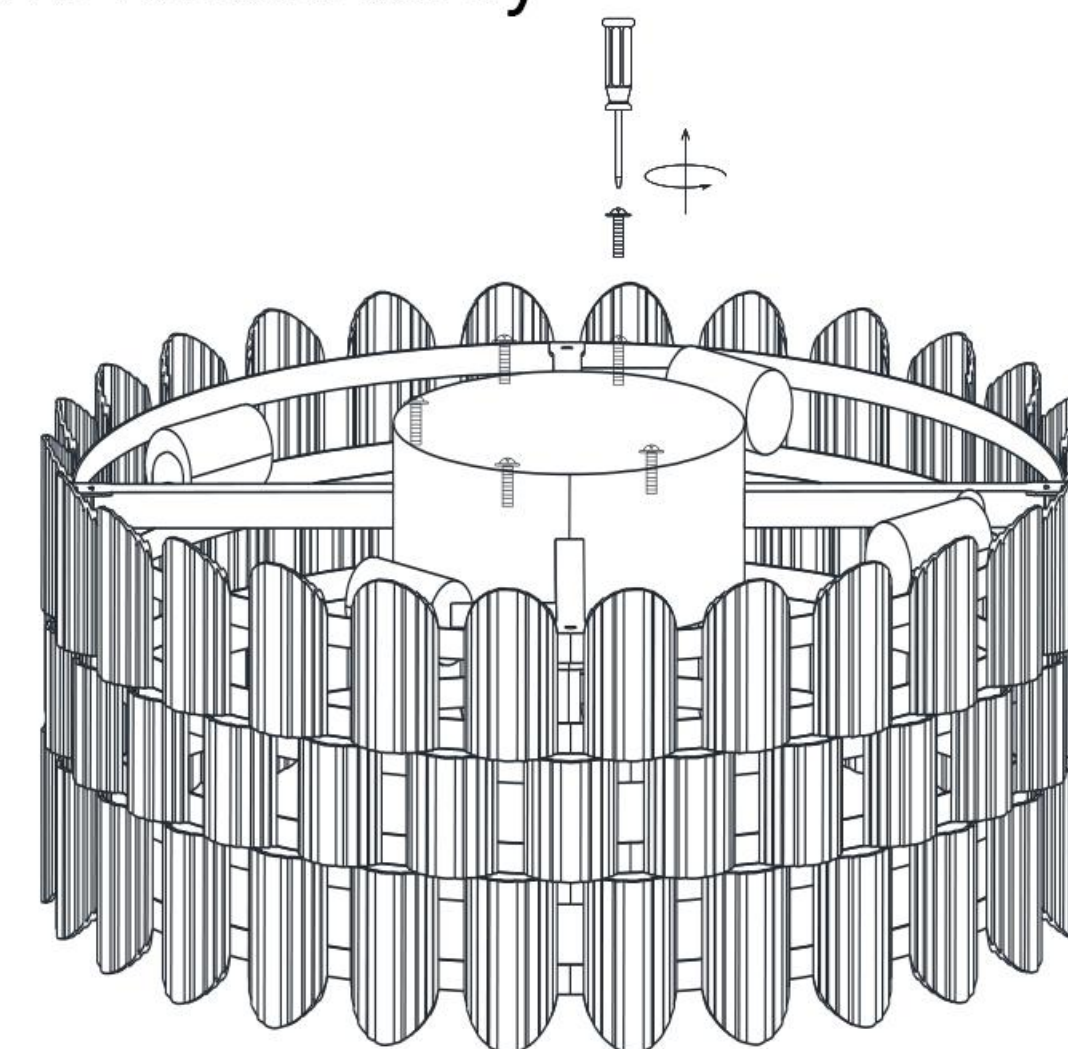


INSTALLATION

- 5** Thread the wires from the fixture body

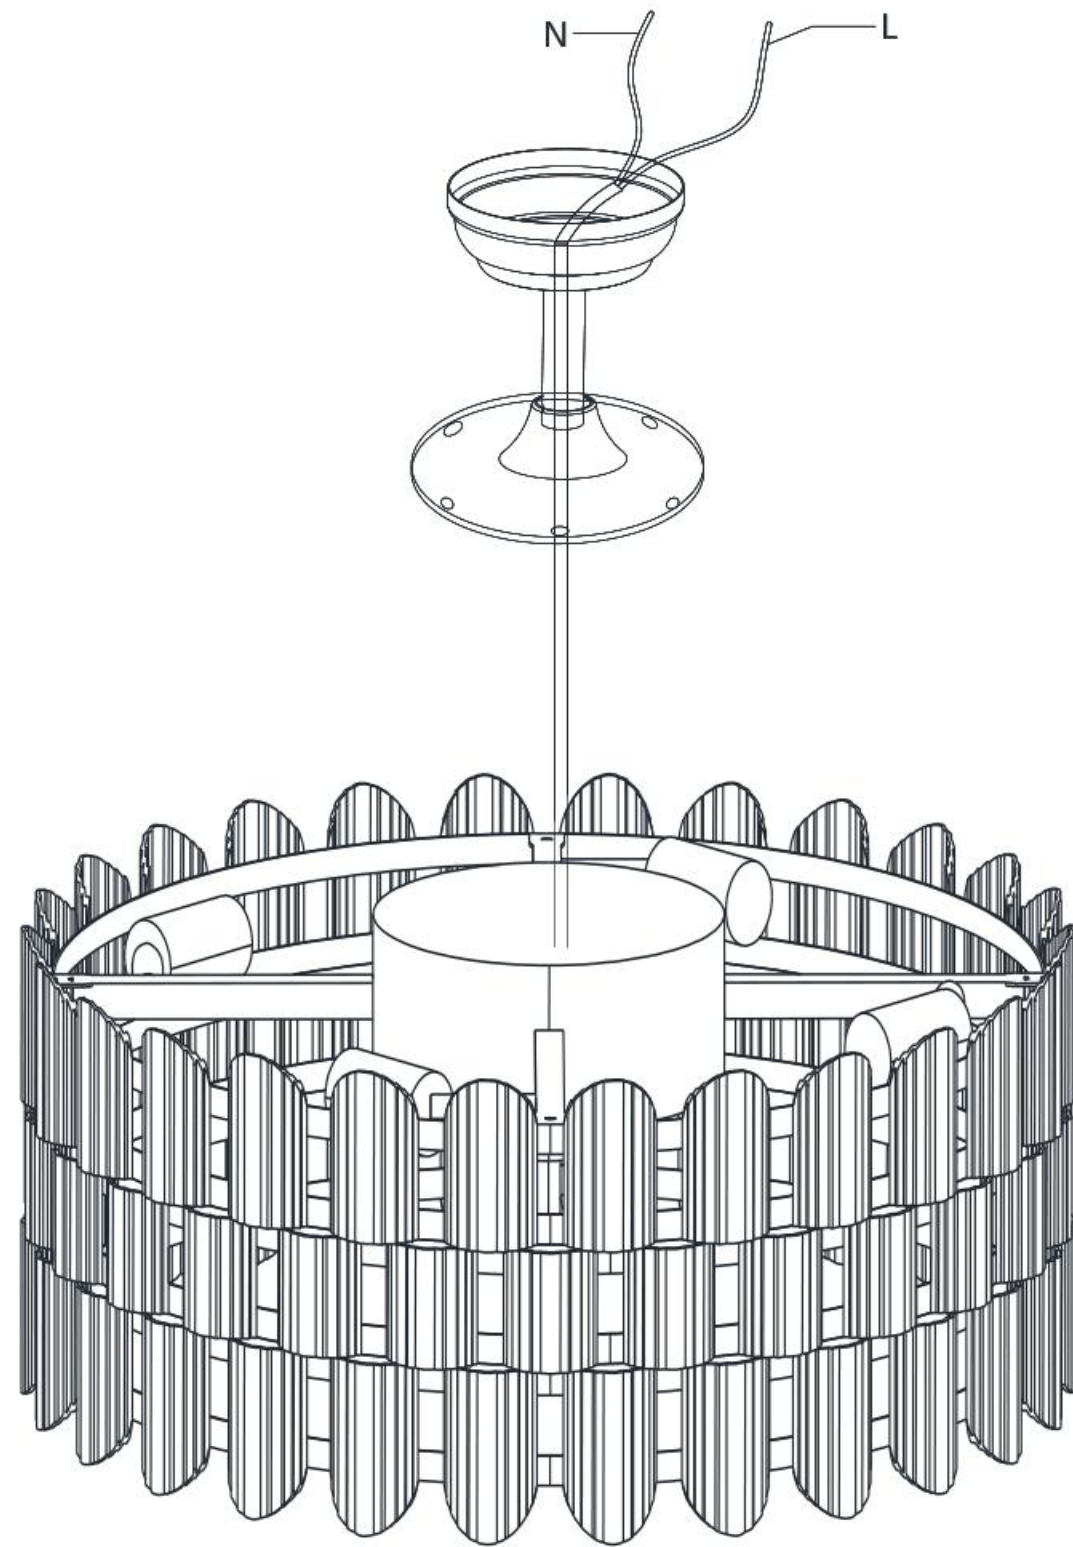

- 6** Install the screws into the motor cap

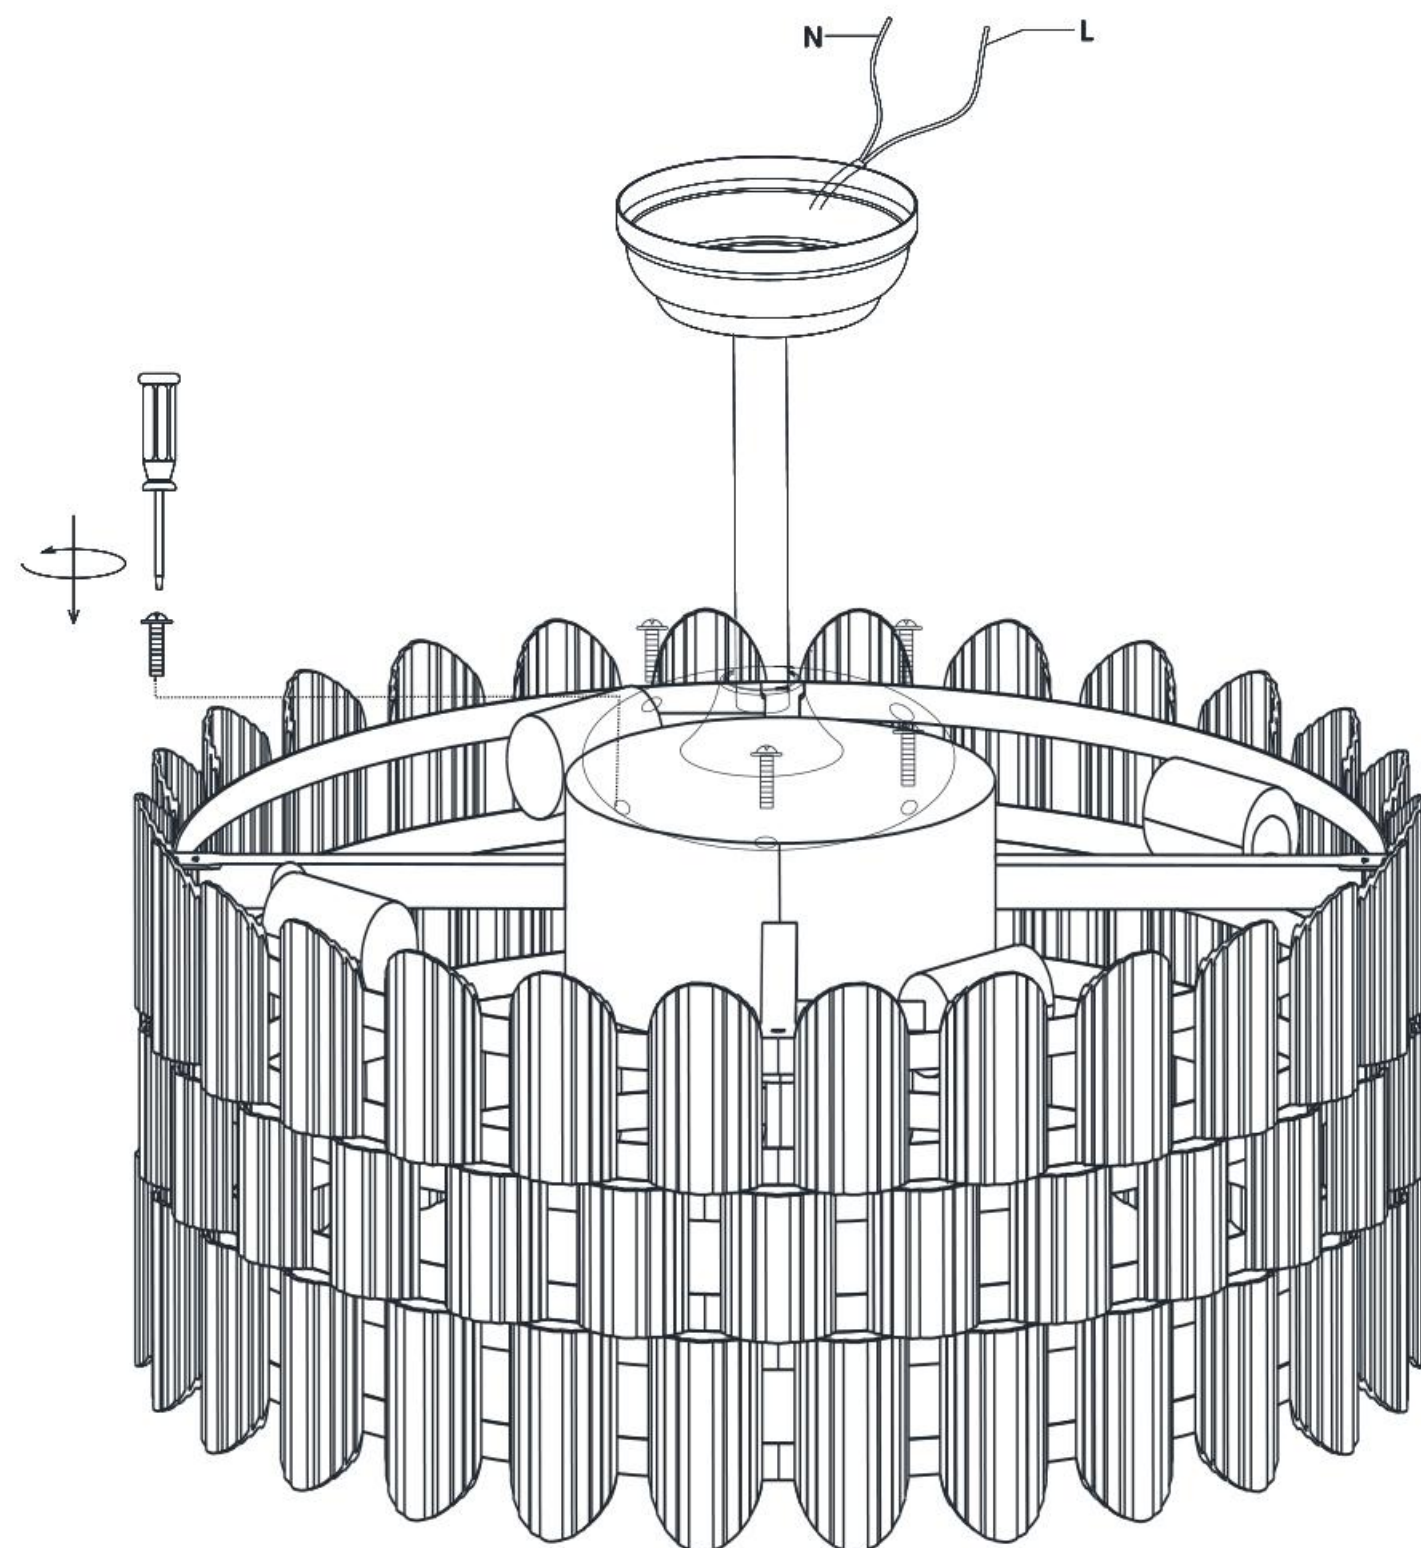

INSTALLATION

- 7** Install Bulbs

Install 4 correct bulbs referring to fixture markings or labels for maximum wattage. If the base angle needs to be changed, disconnect the power supply first

