

ASSEMBLY INSTRUCTIONS



CAUTION

- ◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- ◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder




**Safety
glasses**



**Phillips
screwdriver**

PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


PART BAG




X2



X3




MOUNTING PLATE



FIXTURE

NUT

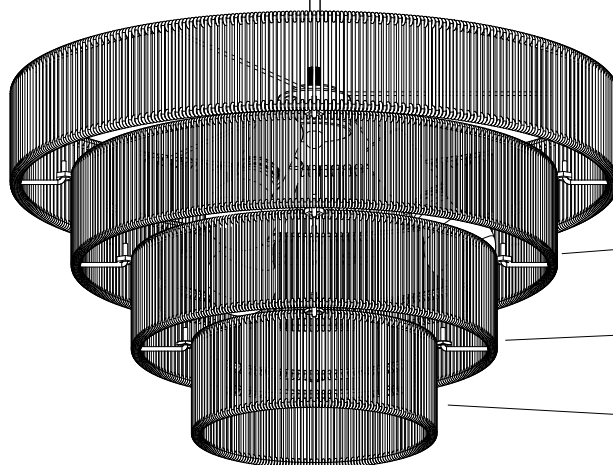

SHADE A


SHADE B

SHADE C

SHADE D


Step 1

Power off

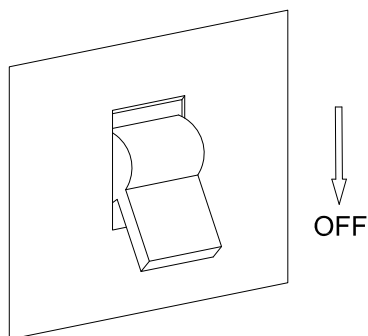

Step 2


Use the mounting screws to attach the mounting

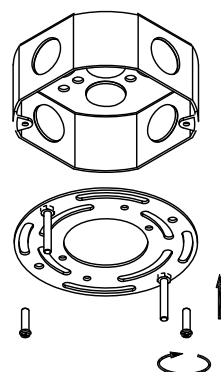

Step 3


a. Connect the wire.

b. Attach the fixture to the mounting plate with the nut

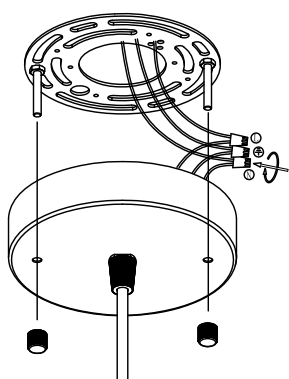

Step 4

Install the bulb.

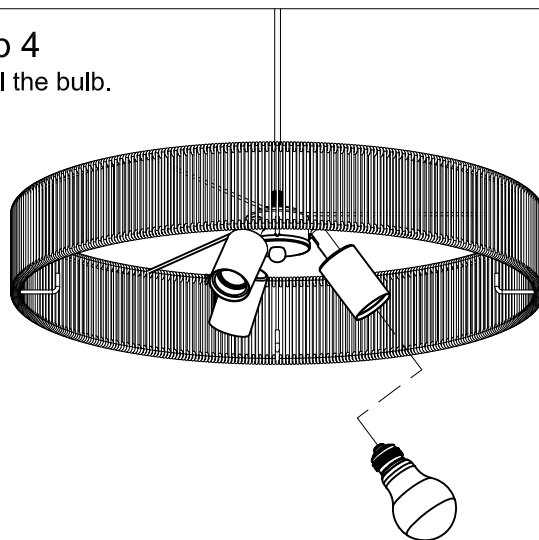


Step 5

a. Hang shade B on shade A.

b. Hang shade C on shade B.

c. Hang shade D on shade C.

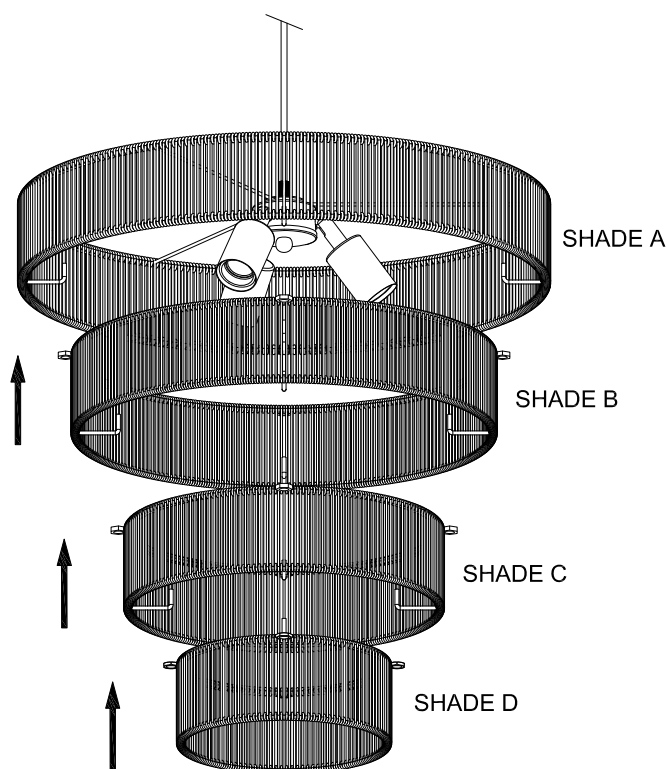

PENDANT LIGHT

