



# San Souci™

## Comfort Height® Touchless Toilet

### K-4000

#### Features

- Simply hold your hand over the sensor to activate.
- Powered by 4 AA batteries (included).
- Easy to clean concealed trapway.
- Compact elongated, space saving bowl.
- Large 3-1/4" canister flush valve features a powerful jet action, providing rapid water delivery from tank to bowl.
- High-efficiency system offers bulk flushing performance and best in class cleanliness.

#### Installation

- 12" rough-in, supply line not included.

#### Water Conservation & Rebates


- Significant water savings of as much as 16,500 gallons of water annually over a 3.5 gallon toilet.
- Meets strict flushing performance guidelines established by the EPA's WaterSense® program.
- Qualifies as an HET (High Efficiency Toilet). Consumer rebates are available in some municipalities.
- This product can help a building earn Water Efficiency points in the LEED Green Building Rating System.

#### Components

Product includes:

K-4008 Toilet Seat

Additional included component/s: Tank Cover, Low Profile Bolt Cap Accessory Pack, Tank Accessory Pack, and Touchless Flush System.

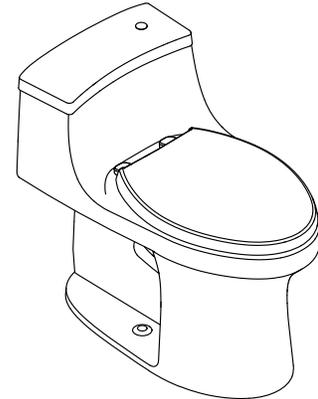

#### Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®


#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

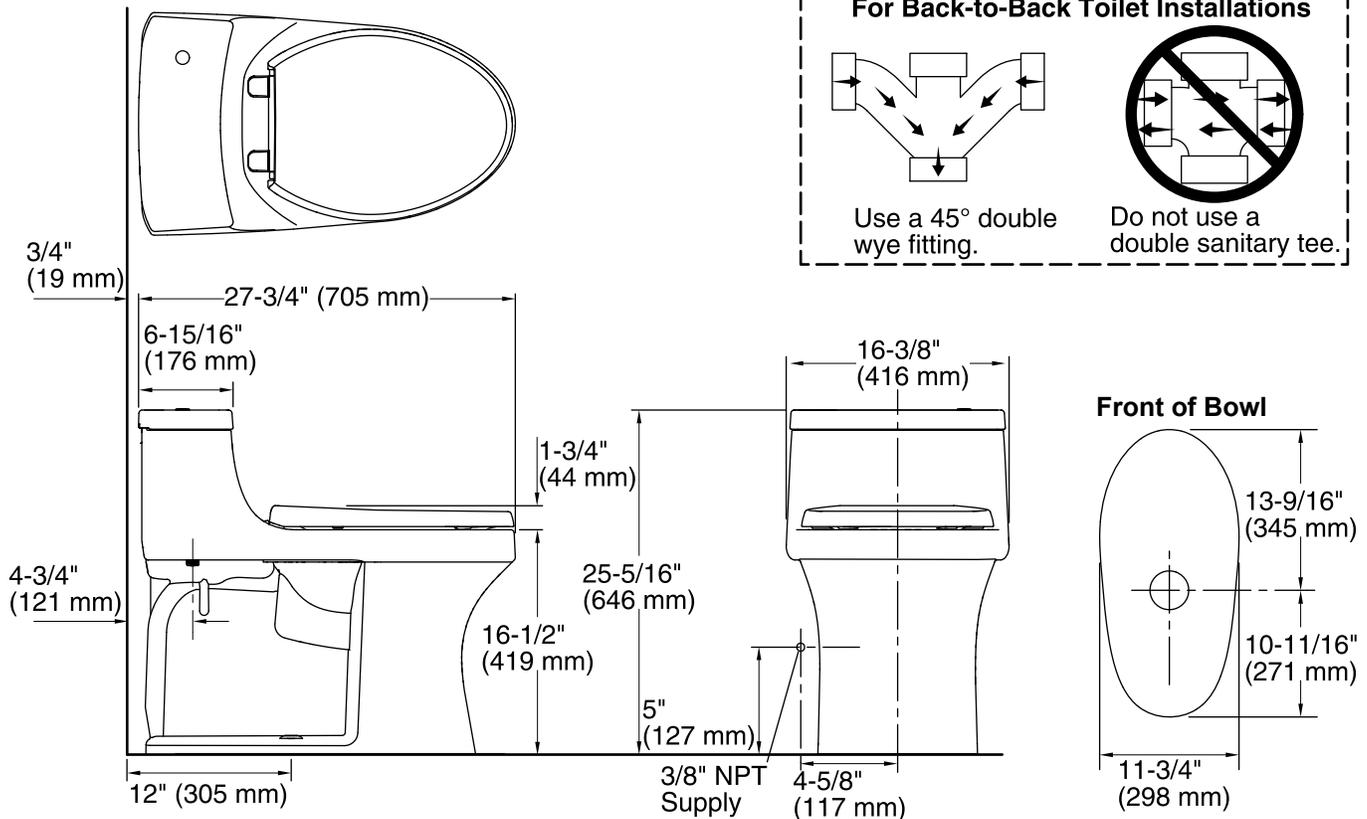

### Technical Information

All product dimensions are nominal.

Toilet type:	One-piece
Bowl shape:	Compact Elongated front
Flush type:	Class Five
Seat hinge type:	Quick-Attach®, Quiet-Close™
Trap passageway:	2-1/8" (54 mm)
<b>Water Consumption</b>	
Full:	1.28 gpf (4.8 lpf)
Water surface size:	10-3/4" x 7-1/2" (273 mm x 191 mm)
Rim to water surface:	5-3/8" (137 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

### Notes

Install this product according to the installation guide.

For back-to-back toilet installations: Use only a 45 degree double wye fitting.