

Project:

Location:

Fixture Type:

Catalog Number:



**AVAILABLE FINISHES:**



Pi

FM-W44806

**PRODUCT DESCRIPTION**

This brand-new design in durable stainless steel handles the outdoor elements with ease, while the sleek polished hardware also gives interiors a welcome touch of industrial refinement. A user-friendly twist lock mechanism makes installation a snap. As for illumination, the finely crafted diffuser enhances the brightness for a beautiful mix of task and ambient light.

**FEATURES**


- ACLED driverless technology
- Weather-resistant 316 stainless steel body
- Lightweight injection-molded acrylic diffuser enhances brightness
- Easy twist-lock installation prevents slippage with no visible hardware
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- 277V option available for 9", 12" and 15" only (special order), not available for 6"
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

**SPECIFICATIONS**

|              |                                                                                             |
|--------------|---------------------------------------------------------------------------------------------|
| Rated Life   | 54000 Hours                                                                                 |
| Standards    | ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019<br>Compliant, Energy Star 2.0, ADA |
| Input        | 120 VAC, 50/60Hz                                                                            |
| Dimming      | ELV: 100-10%, TRIAC: 100-10%                                                                |
| Mounting     | Can be mounted on ceiling or wall in all orientations                                       |
| Color Temp   | 3500K, 3000K, 2700K                                                                         |
| CRI          | 90                                                                                          |
| Construction | Weather-resistant 316 stainless steel body with acrylic shade                               |

**REPLACEMENT PARTS**

-

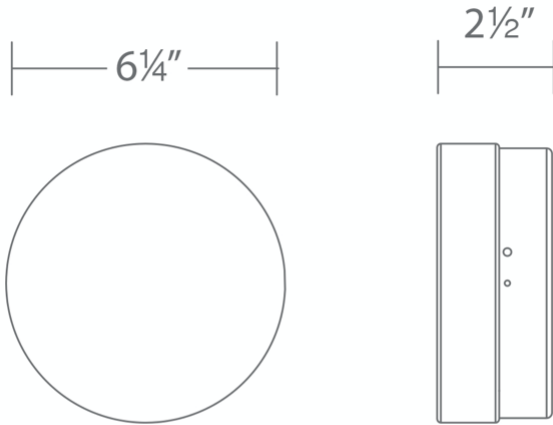


FM-W44806

| Model & Size | Color Temp | Finish             | LED Watts | LED Lumens | Delivered Lumens |
|--------------|------------|--------------------|-----------|------------|------------------|
| FM-W44806 6" | 2700K      | BK Black           | 10.3W     | 878        | 574              |
|              | 2700K      | SS Stainless Steel | 10.3W     | 878        | 574              |
|              | 3000K      | BK Black           | 10.3W     | 790        | 574              |
|              | 3000K      | SS Stainless Steel | 10.3W     | 790        | 574              |
|              | 3500K      | BK Black           | 10.3W     | 800        | 574              |
|              | 3500K      | SS Stainless Steel | 10.3W     | 800        | 574              |

Example: **FM-W44806-35-SS**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

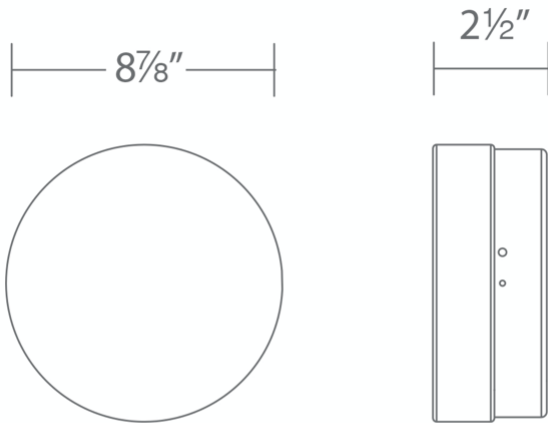

FM-W44809

Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Pi

FM-W44809

**PRODUCT DESCRIPTION**

This brand-new design in durable stainless steel handles the outdoor elements with ease, while the sleek polished hardware also gives interiors a welcome touch of industrial refinement. A user-friendly twist lock mechanism makes installation a snap. As for illumination, the finely crafted diffuser enhances the brightness for a beautiful mix of task and ambient light.

**FEATURES**

- ACLED driverless technology
- 277V option available for special order.
- Weather-resistant 316 stainless steel body
- Lightweight injection-molded acrylic diffuser enhances brightness
- Easy twist-lock installation prevents slippage with no visible hardware
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- 277V option available for 9", 12" and 15" only (special order), not available for 6"
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

**SPECIFICATIONS**

|              |                                                                                             |
|--------------|---------------------------------------------------------------------------------------------|
| Rated Life   | 54000 Hours                                                                                 |
| Standards    | ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019<br>Compliant, Energy Star 2.0, ADA |
| Input        | 120 VAC, 50/60Hz                                                                            |
| Dimming      | ELV: 100-10%, TRIAC: 100-10%                                                                |
| Mounting     | Can be mounted on ceiling or wall in all orientations                                       |
| Color Temp   | 3000K, 2700K, 3500K                                                                         |
| CRI          | 90                                                                                          |
| Construction | Weather-resistant 316 stainless steel body with acrylic shade                               |


**REPLACEMENT PARTS**

| Model & Size | Color Temp | Finish             | LED Watts | LED Lumens | Delivered Lumens |
|--------------|------------|--------------------|-----------|------------|------------------|
| FM-W44809 9" | 2700K      | BK Black           | 16.6W     | 1571       | 1070             |
|              | 2700K      | SS Stainless Steel | 16.6W     | 1571       | 1070             |
|              | 3000K      | BK Black           | 16.6W     | 1400       | 1070             |
|              | 3000K      | SS Stainless Steel | 16.6W     | 1400       | 1070             |
|              | 3500K      | BK Black           | 16.6W     | 1542       | 1070             |
|              | 3500K      | SS Stainless Steel | 16.6W     | 1542       | 1070             |
|              |            |                    |           |            |                  |
|              |            |                    |           |            |                  |

Example: **FM-W44809-35-SS**

•For 277V special order, add an "F" before the finish: FM-W44809F-27-BK

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

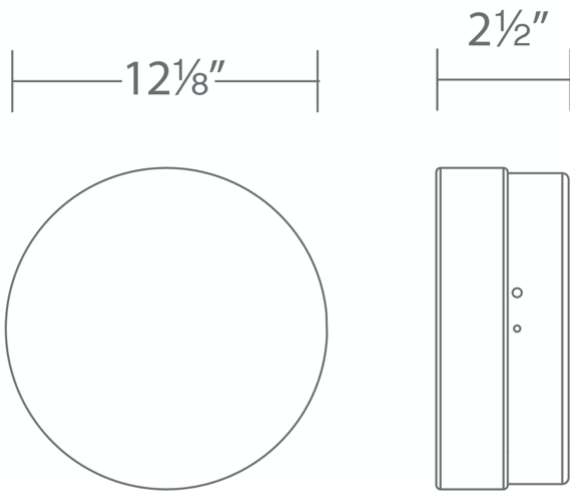

FM-W44812

Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Pi

FM-W44812

**PRODUCT DESCRIPTION**

This brand-new design in durable stainless steel handles the outdoor elements with ease, while the sleek polished hardware also gives interiors a welcome touch of industrial refinement. A user-friendly twist lock mechanism makes installation a snap. As for illumination, the finely crafted diffuser enhances the brightness for a beautiful mix of task and ambient light.

**FEATURES**

- ACLED driverless technology
- Weather-resistant 316 stainless steel body
- Lightweight injection-molded acrylic diffuser enhances brightness
- Easy twist-lock installation prevents slippage with no visible hardware
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- 277V option available for 9", 12" and 15" only (special order), not available for 6"
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)
- 277V option available for special order.

**SPECIFICATIONS**

|              |                                                                                             |
|--------------|---------------------------------------------------------------------------------------------|
| Rated Life   | 54000 Hours                                                                                 |
| Standards    | ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019<br>Compliant, Energy Star 2.0, ADA |
| Input        | 120 VAC, 50/60Hz                                                                            |
| Dimming      | ELV: 100-10%, TRIAC: 100-10%                                                                |
| Mounting     | Can be mounted on ceiling or wall in all orientations                                       |
| Color Temp   | 3500K, 3000K, 2700K                                                                         |
| CRI          | 90                                                                                          |
| Construction | Weather-resistant 316 stainless steel body with acrylic shade                               |

**REPLACEMENT PARTS**


-

| Model & Size  | Color Temp | Finish             | LED Watts | LED Lumens | Delivered Lumens |
|---------------|------------|--------------------|-----------|------------|------------------|
| FM-W44812 12" | 2700K      | BK Black           | 27.4W     | 2566       | 1482             |
|               | 2700K      | SS Stainless Steel | 27.4W     | 2566       | 1482             |
|               | 3000K      | BK Black           | 27.4W     | 2315       | 1482             |
|               | 3000K      | SS Stainless Steel | 27.4W     | 2315       | 1482             |
|               | 3500K      | BK Black           | 27.4W     | 2400       | 1482             |
|               | 3500K      | SS Stainless Steel | 27.4W     | 2400       | 1482             |

Example: **FM-W44812-35-SS**

•For 277V special order, add an "F" before the finish: FM-W44812F-35-SS

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

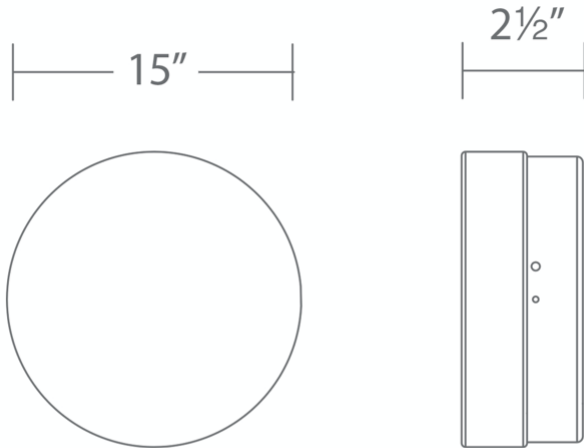

FM-W44815

Project:

Location:

Fixture Type:

Catalog Number:

#### AVAILABLE FINISHES:



## Pi

FM-W44815

#### PRODUCT DESCRIPTION

This brand-new design in durable stainless steel handles the outdoor elements with ease, while the sleek polished hardware also gives interiors a welcome touch of industrial refinement. A user-friendly twist lock mechanism makes installation a snap. As for illumination, the finely crafted diffuser enhances the brightness for a beautiful mix of task and ambient light.

#### FEATURES

- ACLED driverless technology
- Weather-resistant 316 stainless steel body
- Lightweight injection-molded acrylic diffuser enhances brightness
- Easy twist-lock installation prevents slippage with no visible hardware
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- 277V option available for 9", 12" and 15" only (special order), not available for 6"
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

#### SPECIFICATIONS

|              |                                                                                             |
|--------------|---------------------------------------------------------------------------------------------|
| Rated Life   | 54000 Hours                                                                                 |
| Standards    | ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019<br>Compliant, Energy Star 2.0, ADA |
| Input        | 120 VAC, 50/60Hz                                                                            |
| Dimming      | ELV: 100-10%, TRIAC: 100-10%                                                                |
| Mounting     | Can be mounted on ceiling or wall in all orientations                                       |
| Color Temp   | 3000K, 3500K                                                                                |
| CRI          | 90                                                                                          |
| Construction | Weather-resistant 316 stainless steel body with acrylic shade                               |

#### REPLACEMENT PARTS

-

| Model & Size  | Color Temp | Finish             | LED Watts | LED Lumens | Delivered Lumens |
|---------------|------------|--------------------|-----------|------------|------------------|
| FM-W44815 15" | 3000K      | BK Black           | 31.3W     | 2745       | 1773             |
|               | 3000K      | SS Stainless Steel | 31.3W     | 2745       | 1773             |
|               | 3500K      | BK Black           | 31.3W     | 2980       | 1838             |
|               | 3500K      | SS Stainless Steel | 31.3W     | 2980       | 1838             |

Example: **FM-W44815-35-SS**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)