


5 LIGHT CHANDELIER

ASSEMBLY INSTRUCTIONS


REMOVE ALL PARTS FROM PACKAGE, BE CAREFUL NOT
TO DAMAGE ANY COMPONENTS.

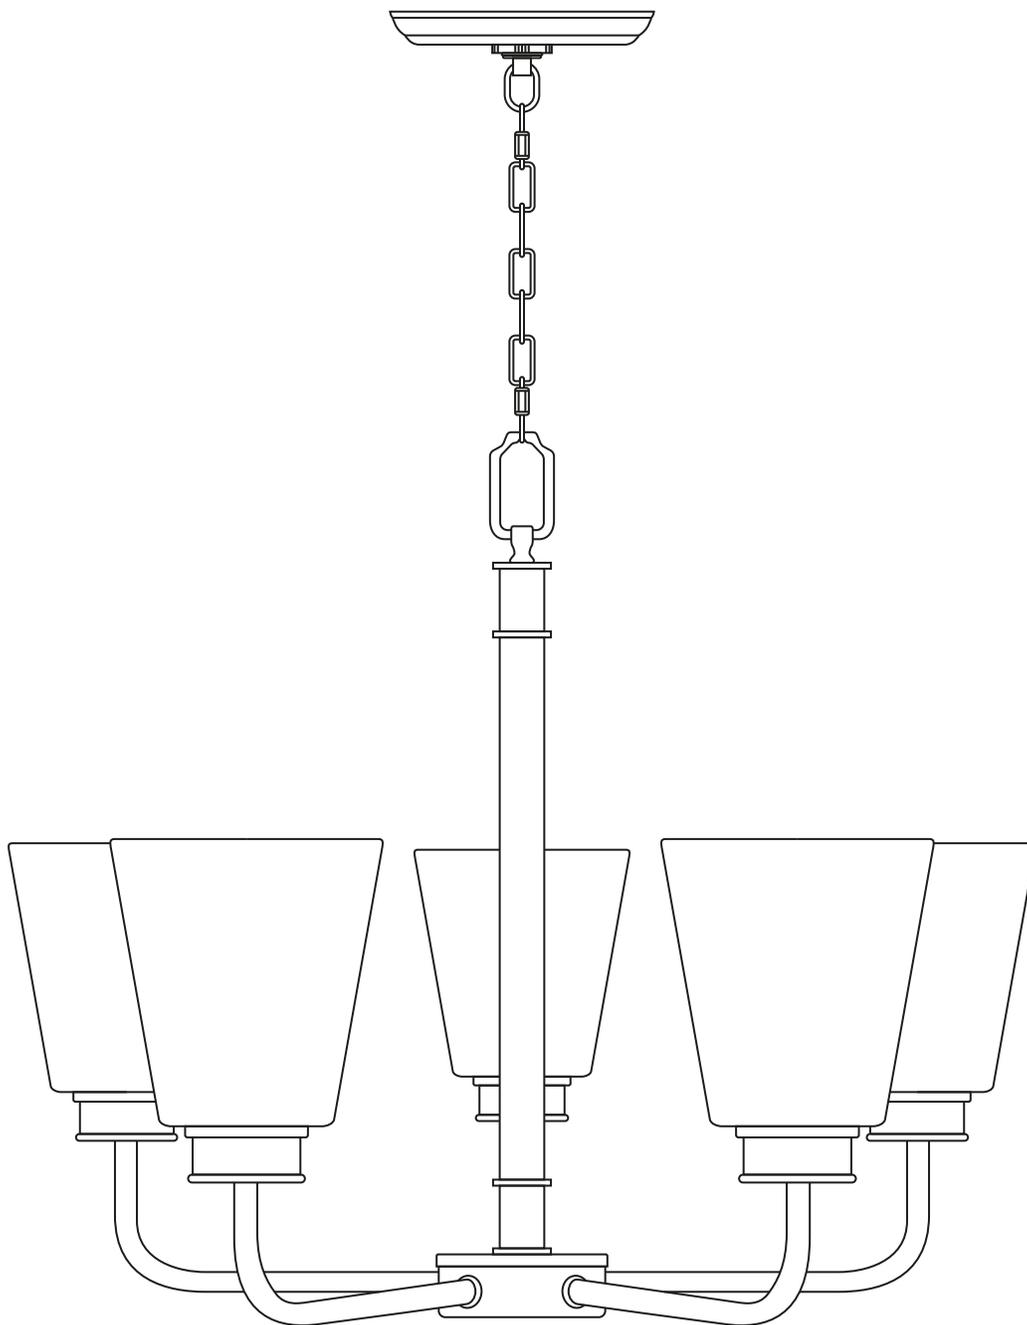

PROFESSIONAL INSTALLATION RECOMMENDED

5 LIGHT CHANDELIER

REMOVE ALL PARTS FROM PACKAGE, BE CAREFUL NOT TO DAMAGE ANY COMPONENTS.

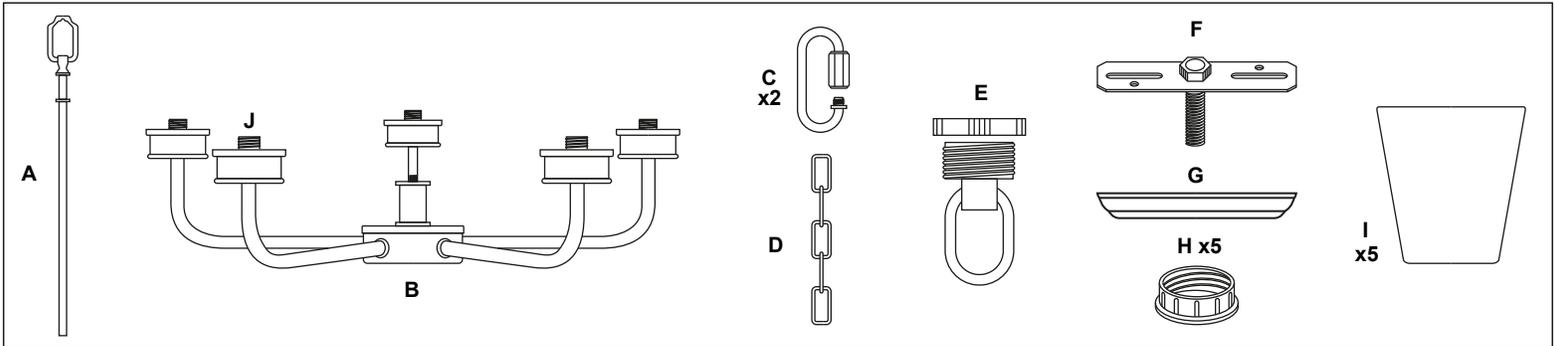

1. Measure area and determine desired hanging height.

2. Attach pre-wired hanging rod [A] to light hub base [B]

3. Remove thumb-screw link [C] from one end of chain [D] and set aside. Adjust chain [D] length by removing pre-cut links (pliers recommended, not included) until desired hanging height is achieved.

4. Reattach thumb-screw link [C] to chain [D]. Attach chain [D] to hanging rod [A] with thumb-screw link [C] and tighten.

5. Thread wire [E] through every third link until end of chain [D] is reached.

6. Detach hanging link [E] from mounting plate [F].


7. Thread wire through hanging link [E] and canopy [G].

8. Mounting plate [F] will attach to ceiling junction box.

9. Install light to ceiling. We recommend installation by a qualified electrical professional.

10. Remove socket ring [H]. Place shade [I] over socket [J] and secure with socket ring [H]. Repeat for all sockets.

11. Install bulbs 100W max (bulbs not included).

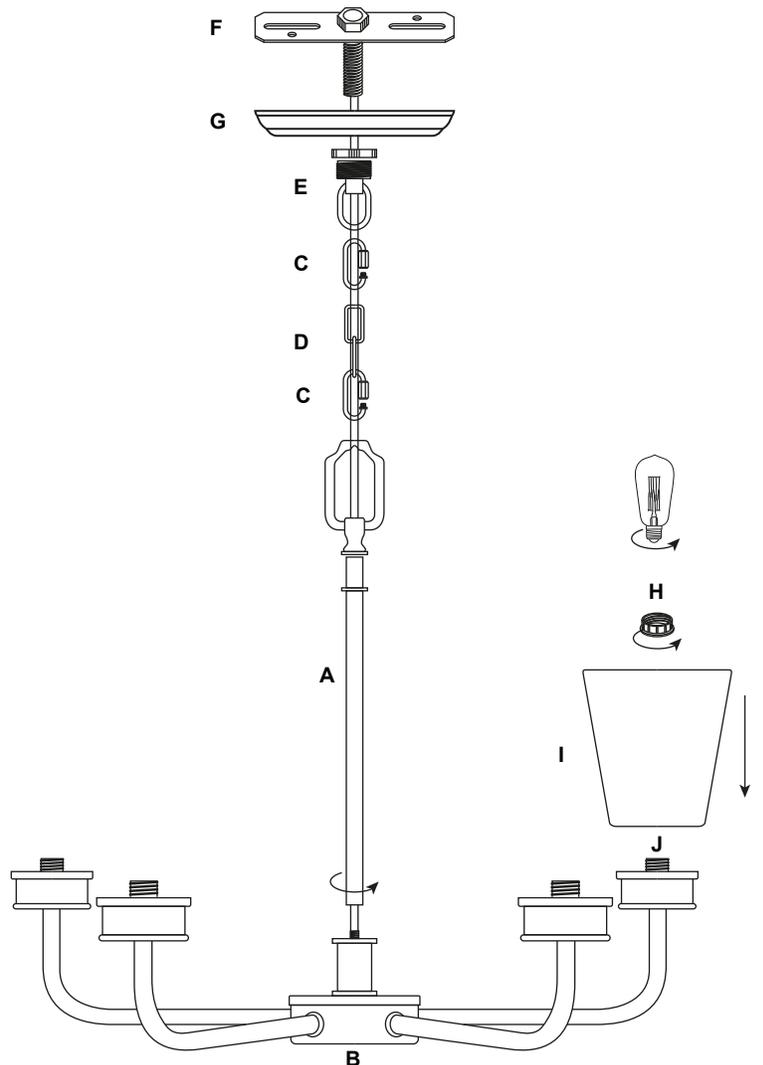

Note: Turn off switch before replacing a bulb. Make sure the bulb has sufficient time to cool down. Do not subject the lamp to any shock while lit as shattering of glass shade may result.