


**LBL394 LBL395
LBL396 LBL397
LBL398**

USER MANUAL
LED SURFACE DOWNLIGHT



1. SWITCH OFF MAIN
2. MAKE HOLE PATTERN
3. INSTALL THE BASE PLATE
4. CONNECT LAMP TO THE MAIN
5. DRIVE IN THE SCREWS UNTILL TIGHT
6. SWITCH ON THE MAIN AND LIGHT ON

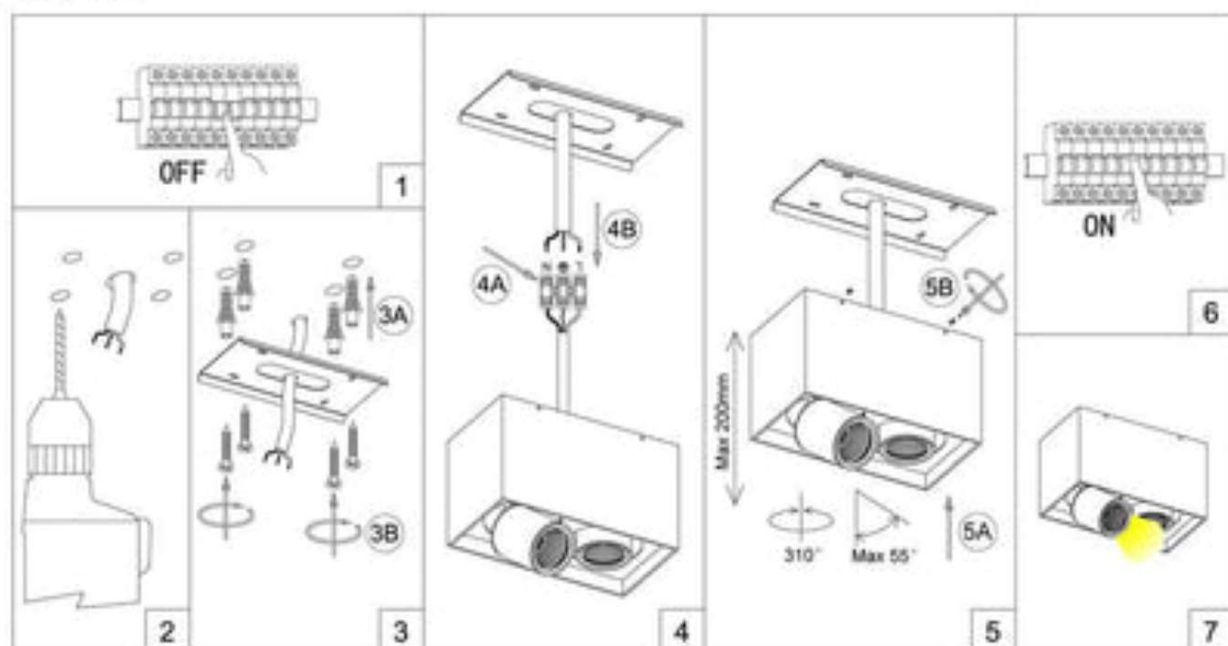

Lamp: CREE COB LED
Color: 2700K/3000K/4000K/6000K
Color rendering: Ra90
Input: 220V-240V AC
Current: Constant 150/300/400/600/900mA
Frequency: 50/60Hz
Watt: 6W/2x6W/3x6W/4x6W/6x6W
Life span: 20,000hrs
Operating temp: -20°C ~ +40°C
Indoor use only
IP20
Dimmable: NO

Cautions: a. Installed by qualified electrician
b. Use only power-supply supplied
by manufacturer for products guarantee