

# Accessories List

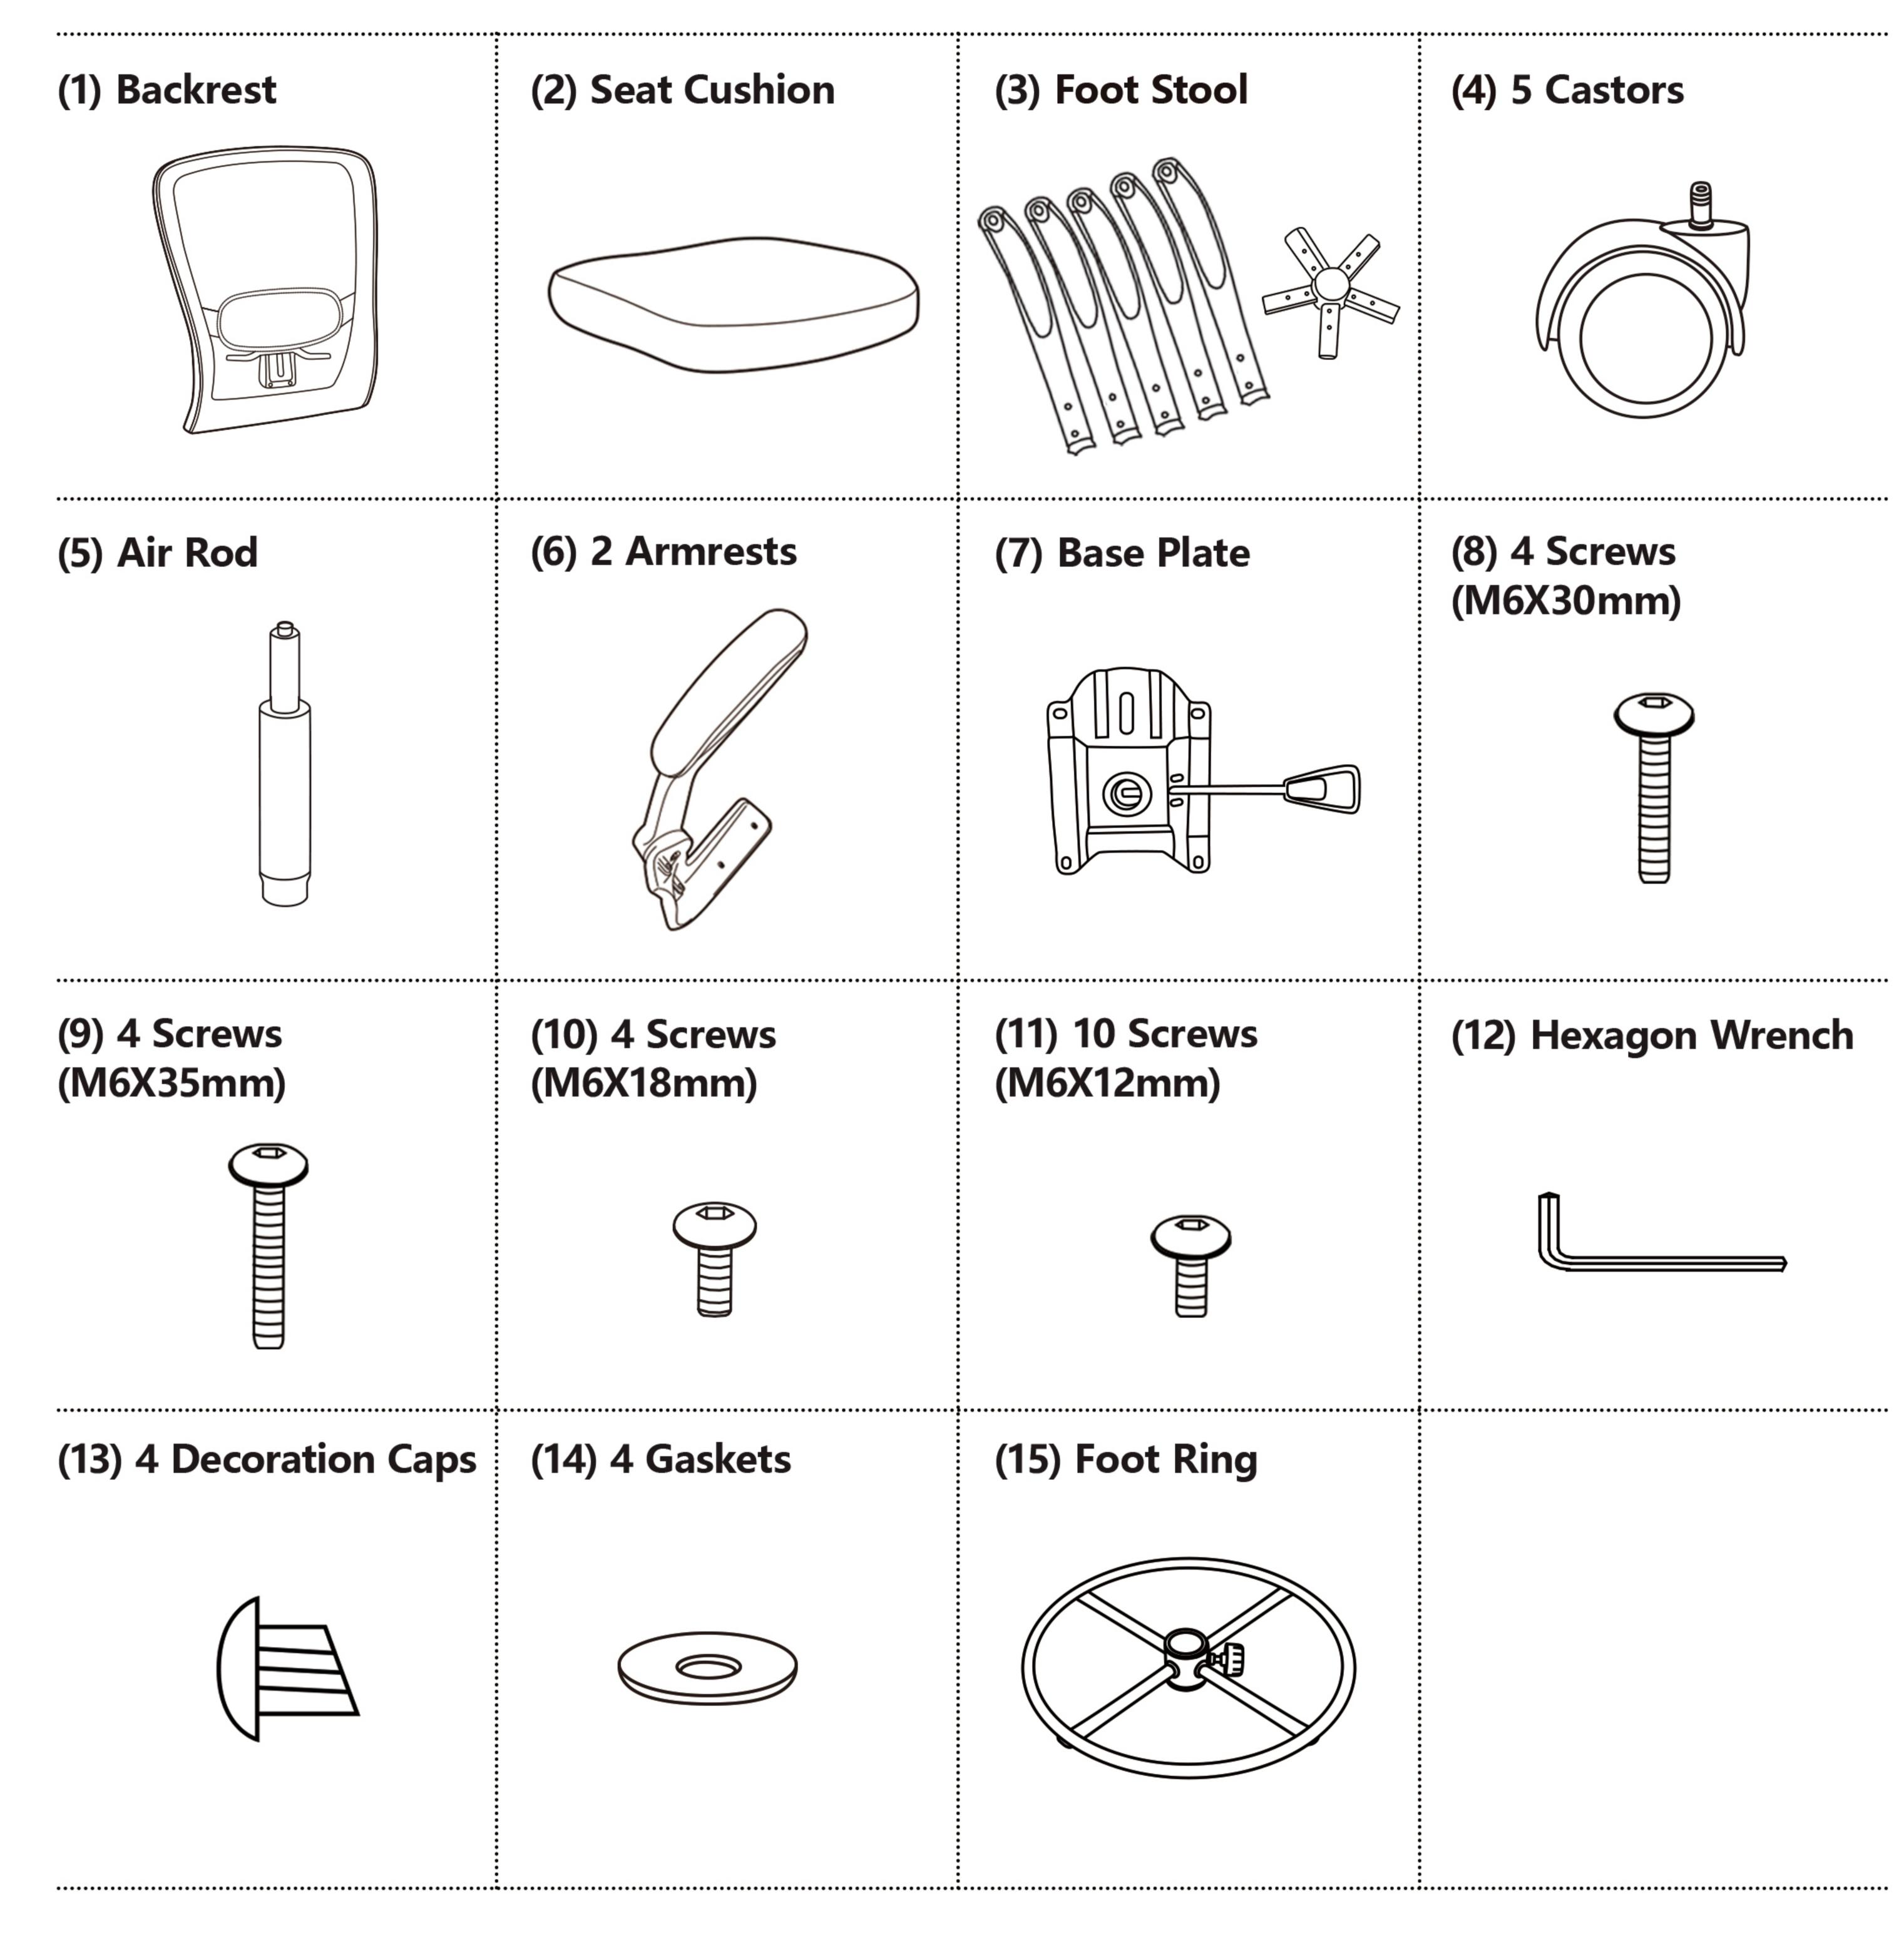


# Notice


- Do not stand in this chair or use the chair as a step ladder use it as chair only. This chair is designed for one person to use at a time.
- Do not use this chair unless all bolts, screws and knobs are firmly secured.
- Check all bolts, screws and knobs every 90 days. Tighten if any are loose.
- Failure to follow these instructions may result in serious injury or death of yourself and people around you.
- Some of the parts are heavy and/or have shape edges, please install it carefully to avoid hurting you and people around you.

# Instructions for Use

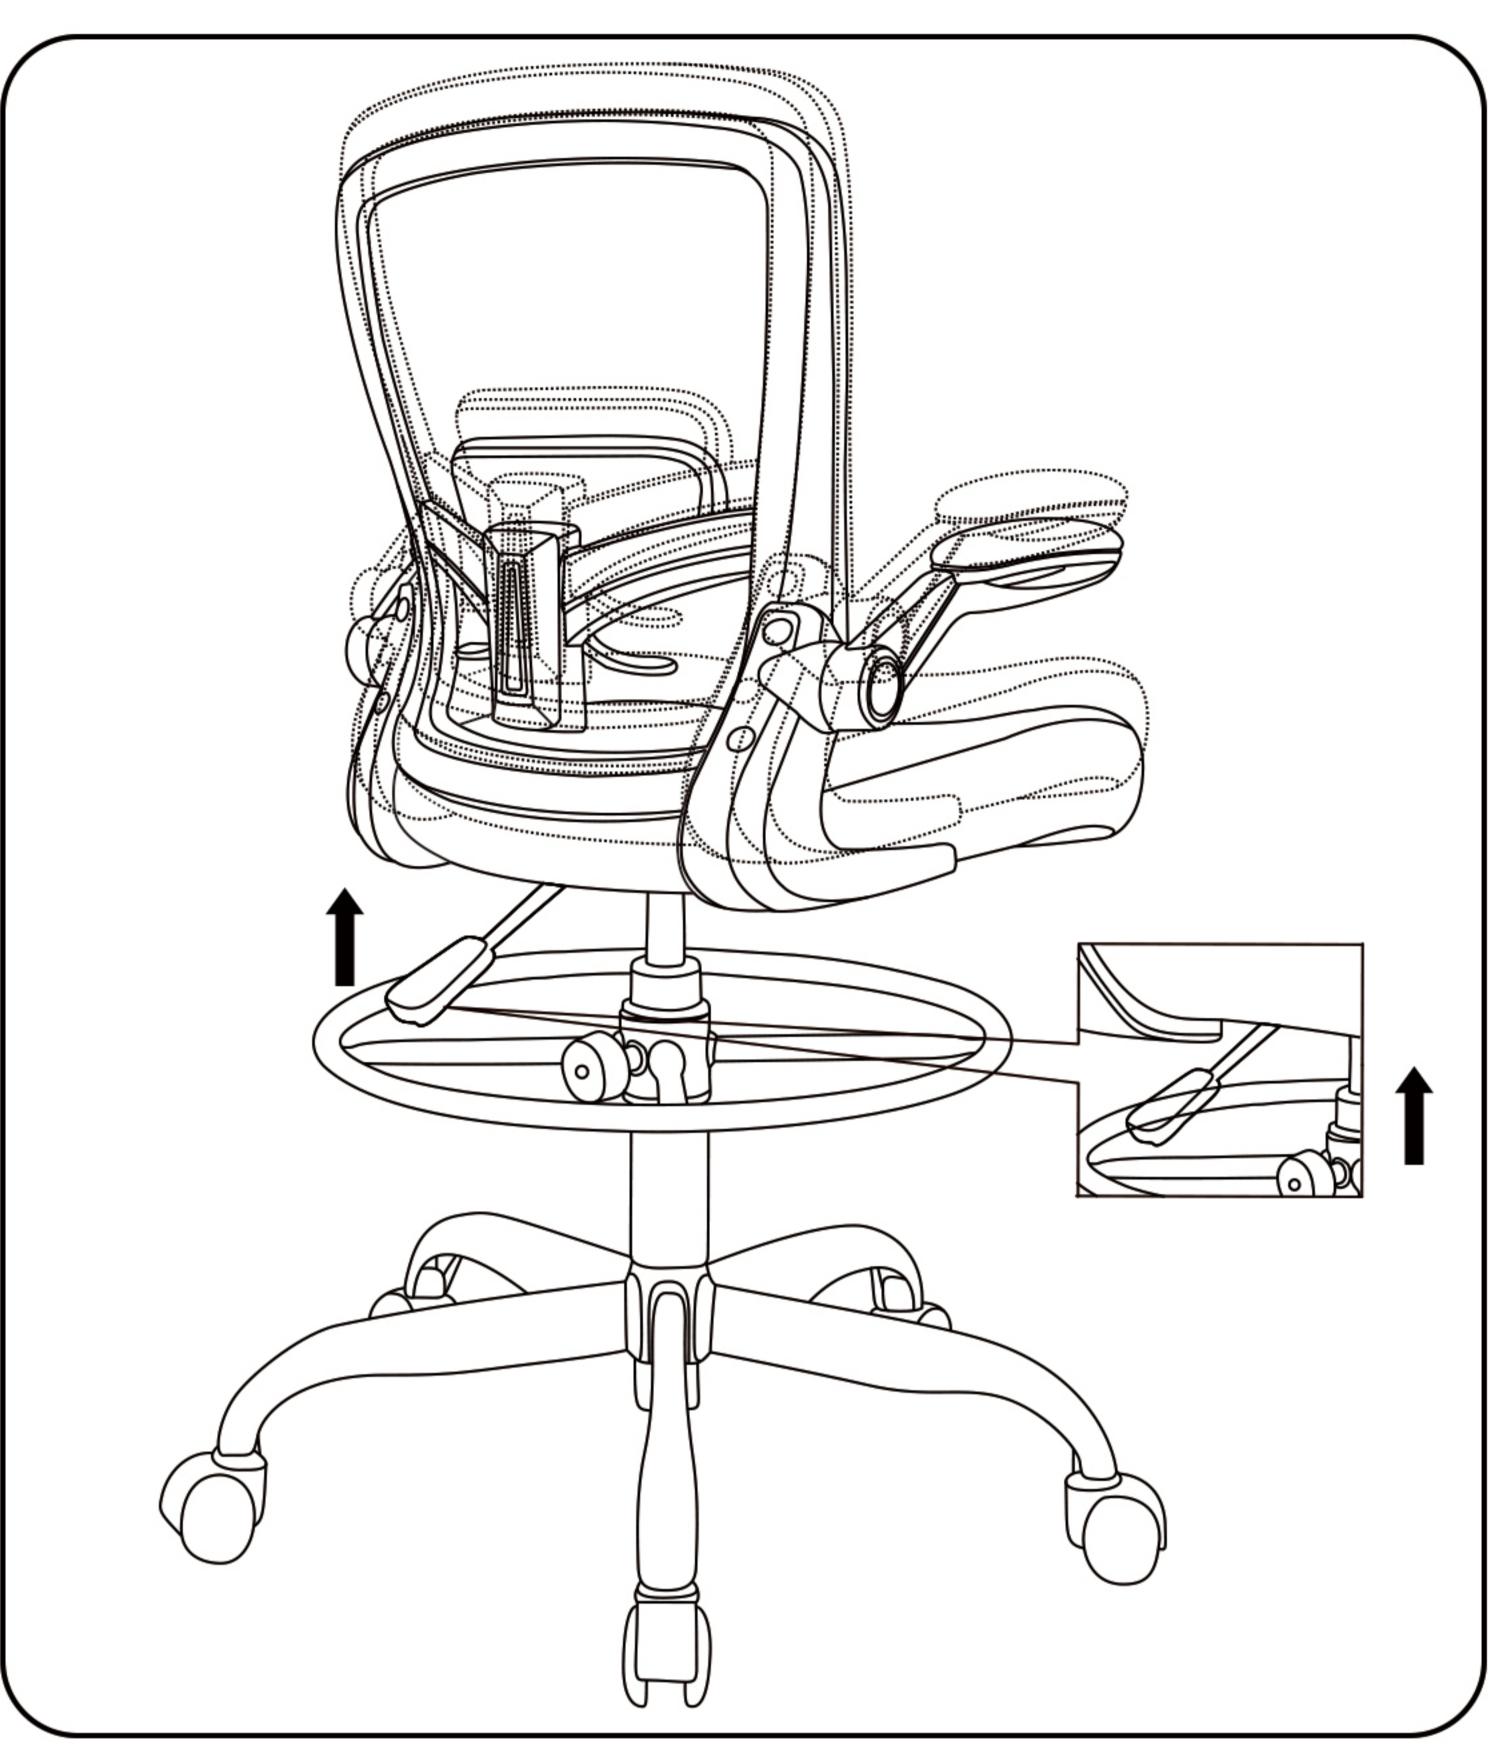

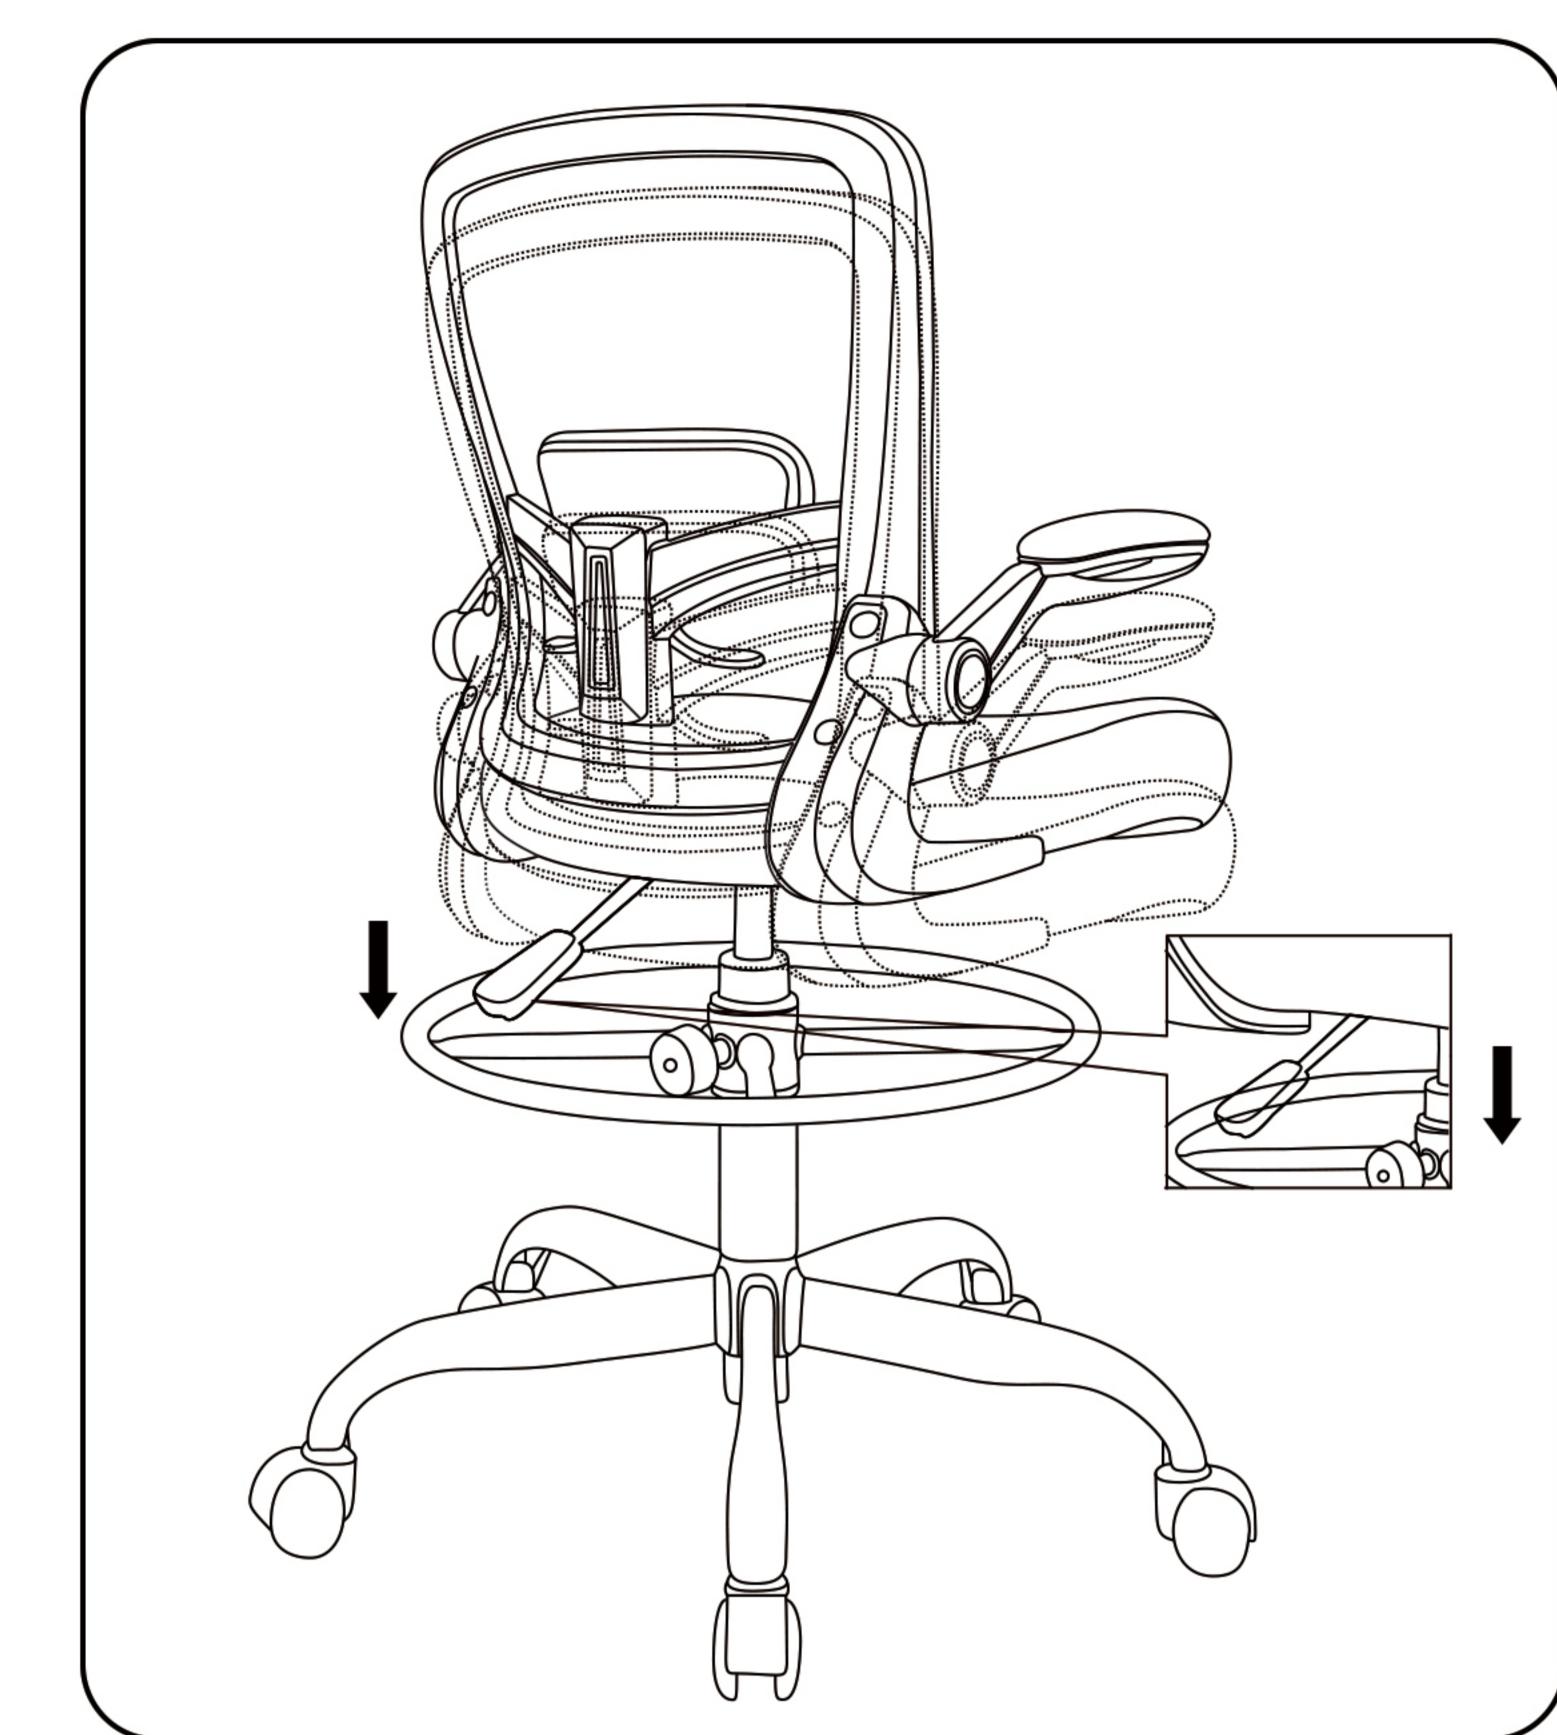


Upward adjustment

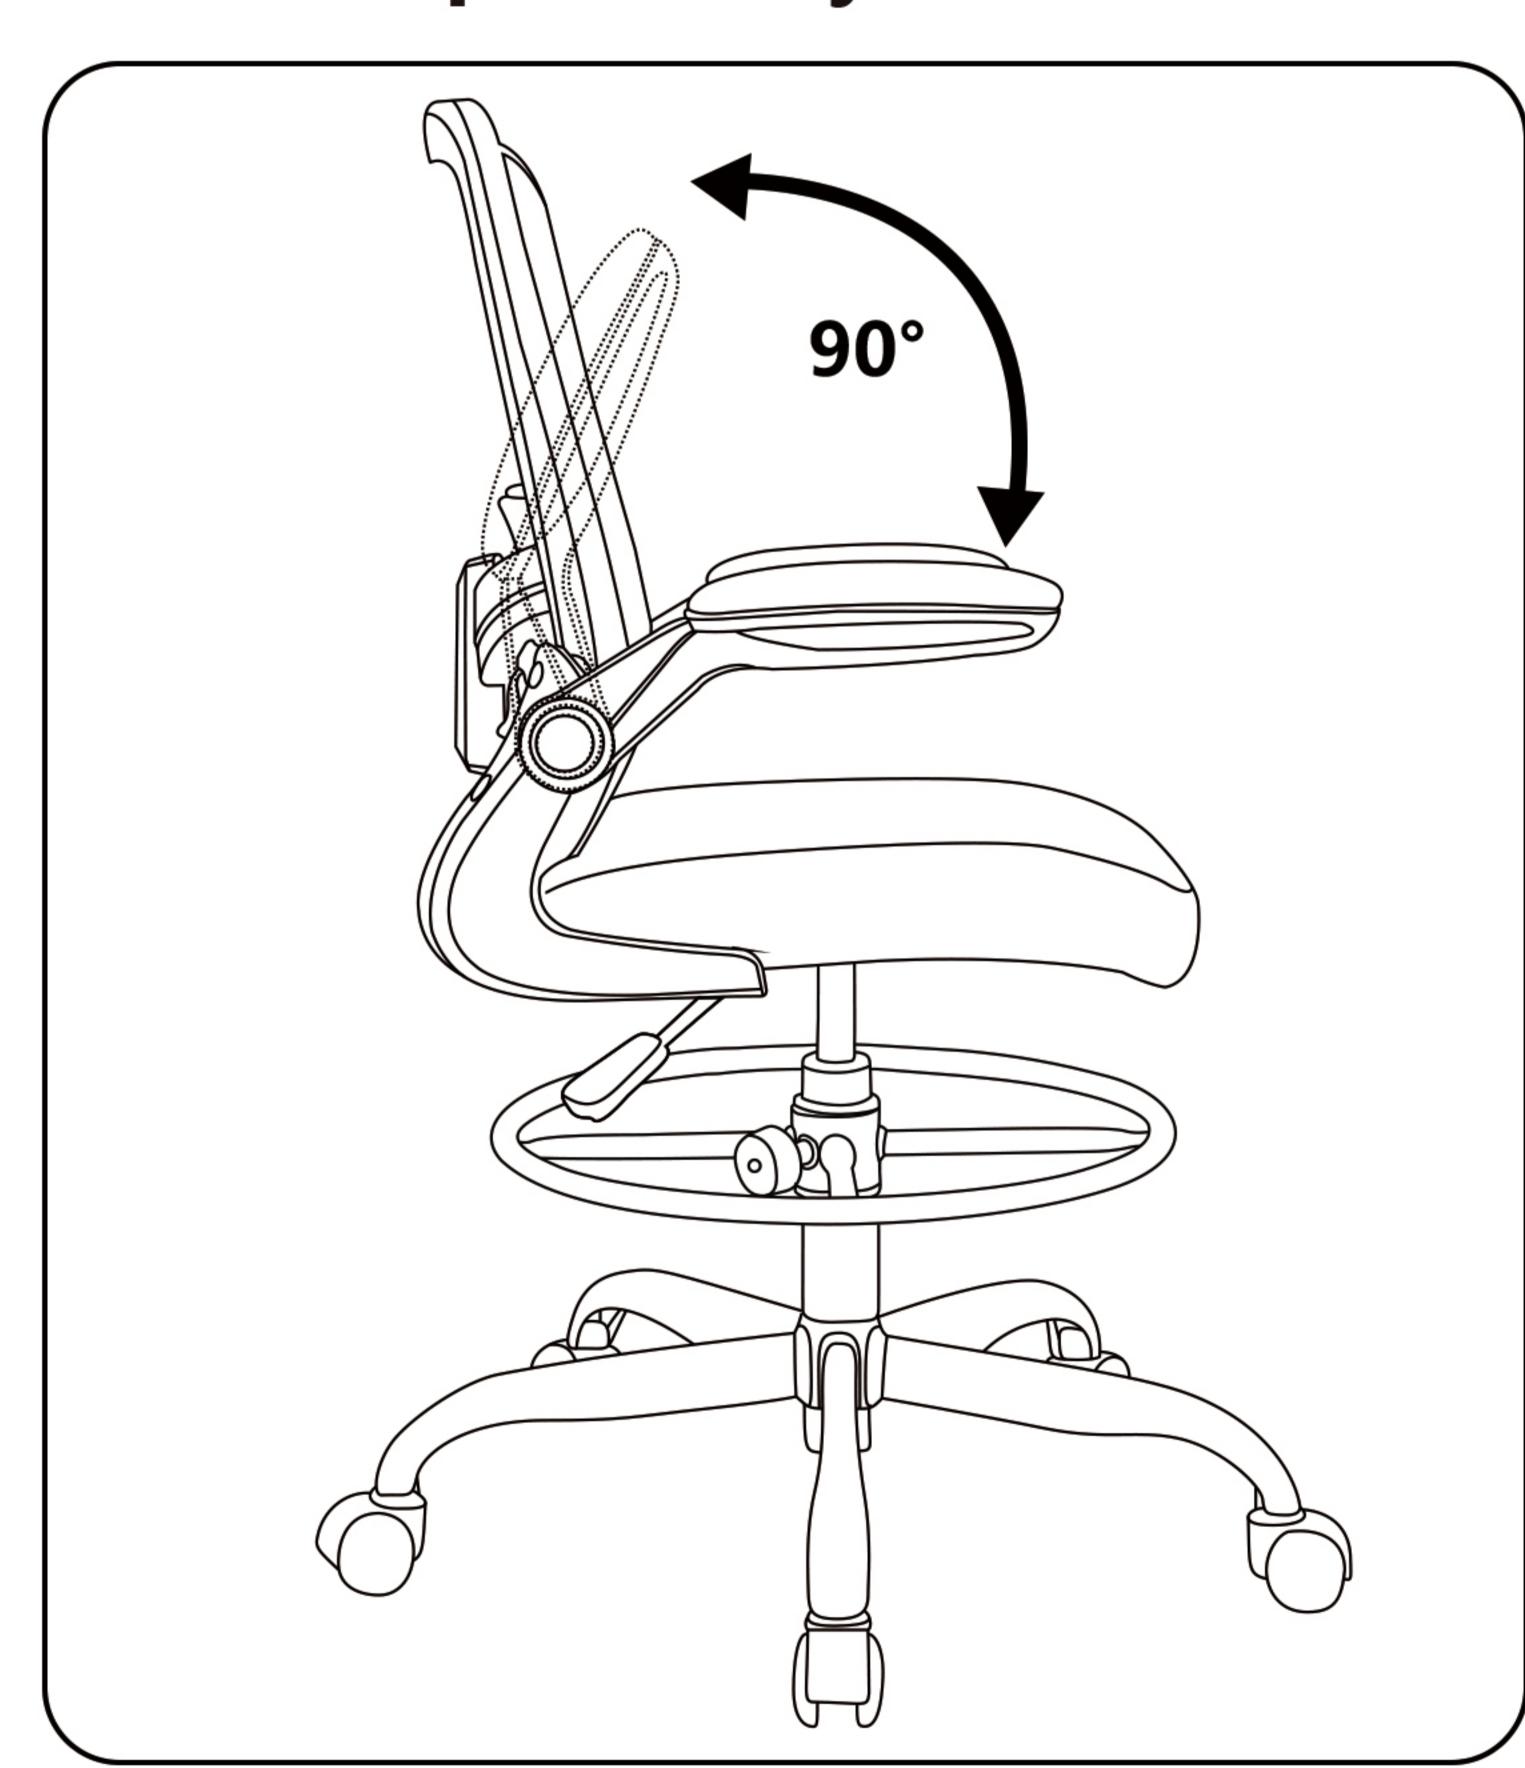

Armrest adjustment



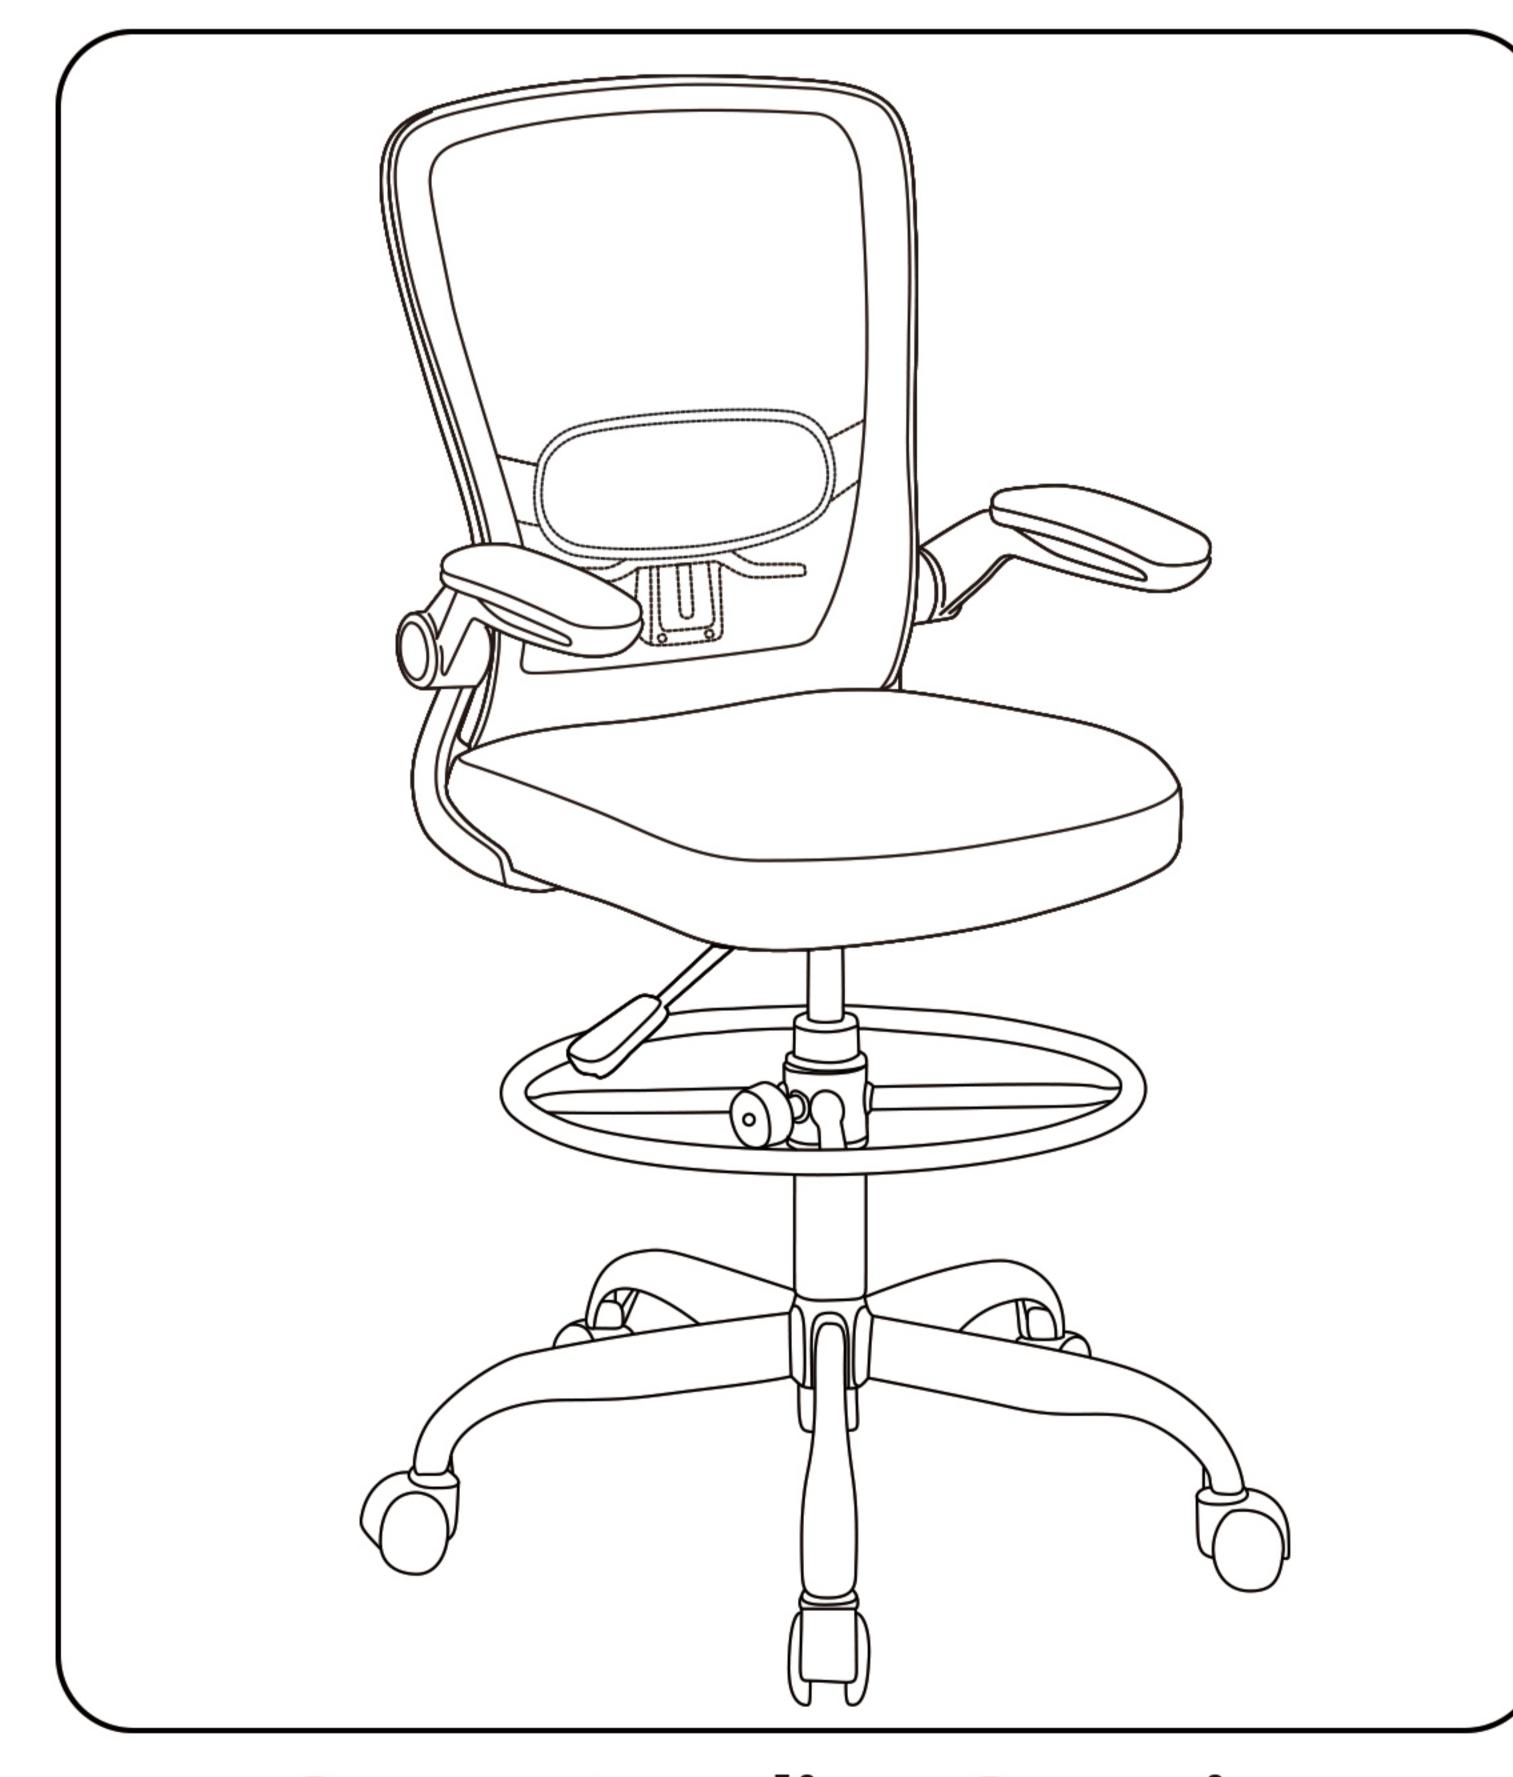

Strong Loading Capacity


Thanks for purchasing our products. Please read this manual before assembly. And please assemble in order. After the assembly, keep the instruction properly. Make sure all the parts are included (15 kinds in total).

# **Assembly Instruction**

Please assemble in a wide and flat place.

# Step 1


Insert 5 Split Foot Stool (3) into the central base tube as shown. Align with the holes on both sides, tighten 10 Screws M6X12mm (11) with Hexagon Wrench (12).

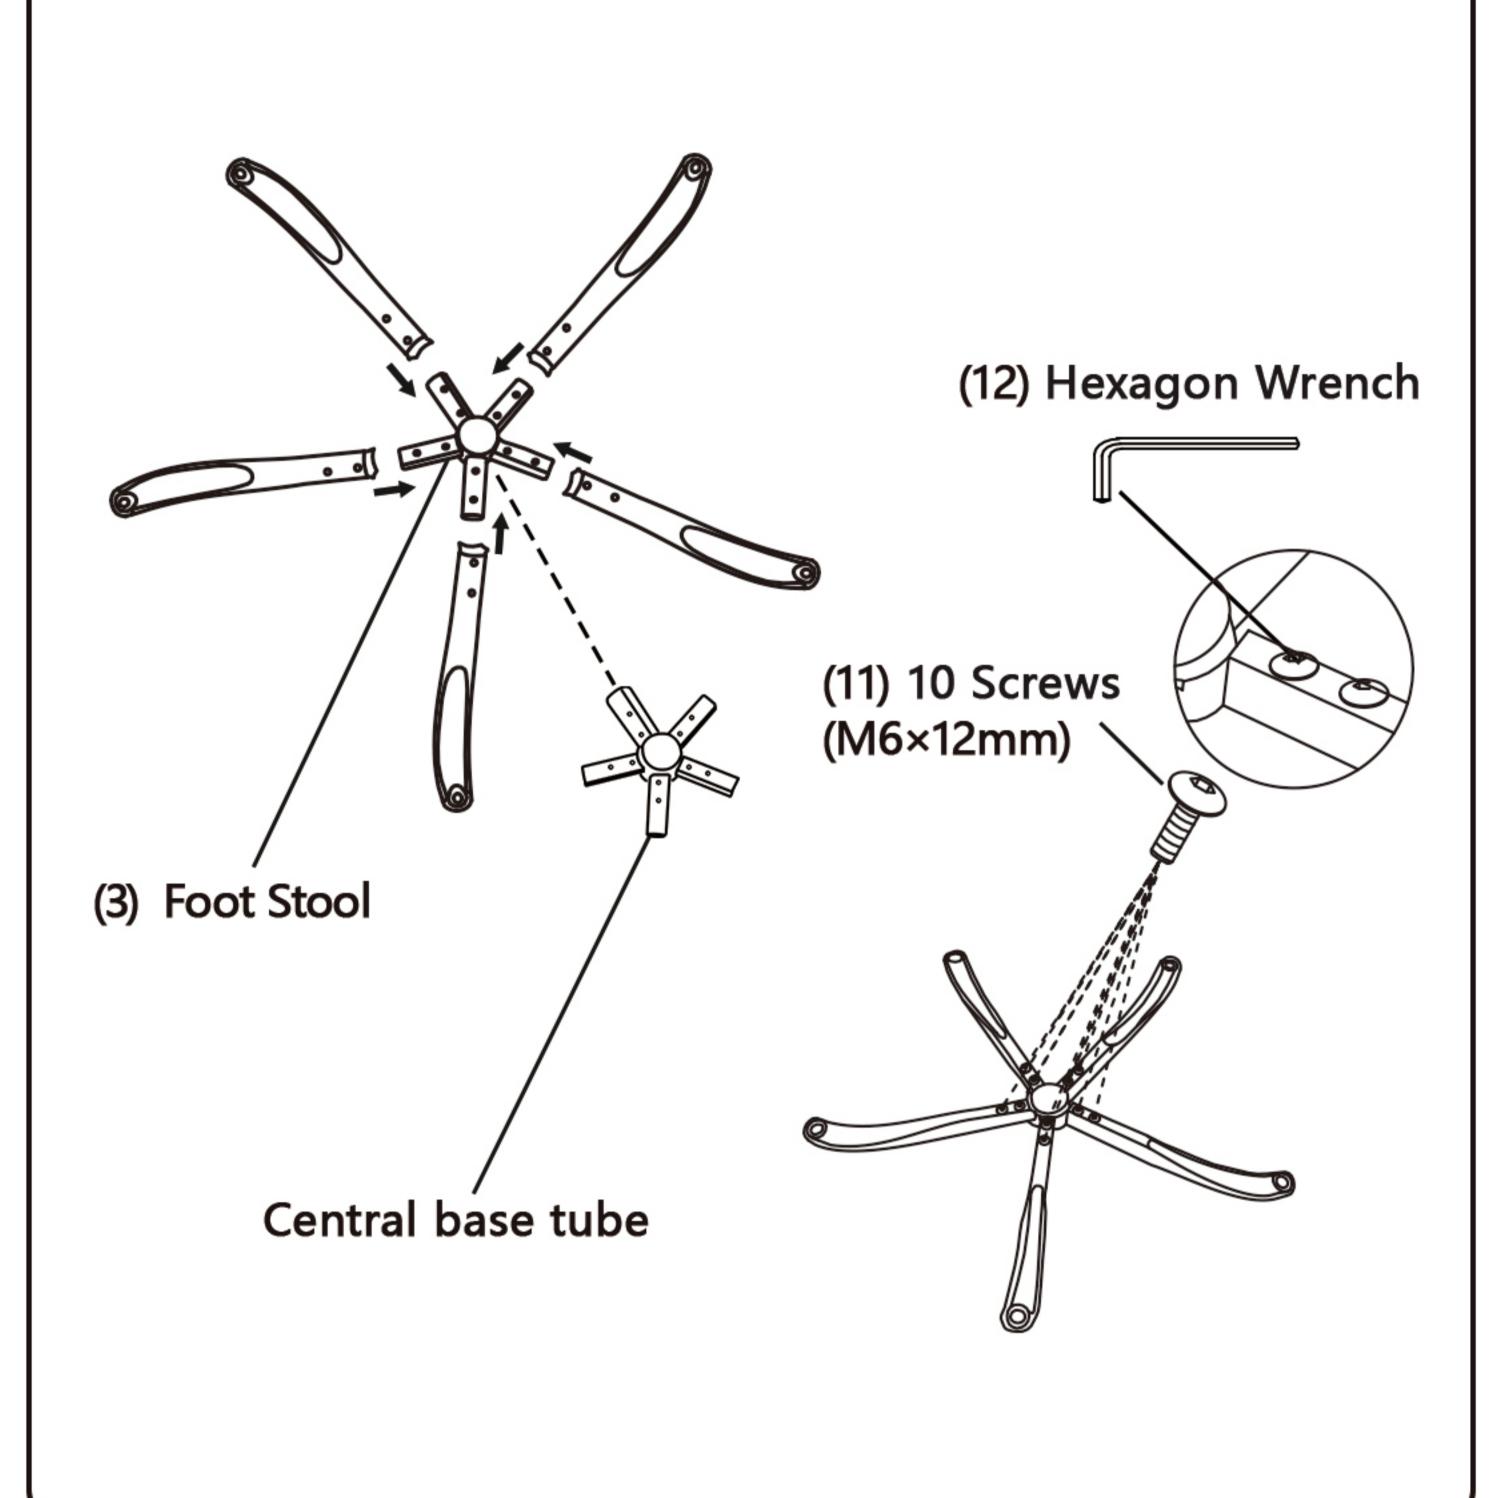

### Step 2

Insert the 5 Castors (4) into the footstool installed in step one and press them in firmly.


\*Caution: Confirm Castors (4) must be inserted deeply. Otherwise, the Castors could easily fall out and the chair could fall down.

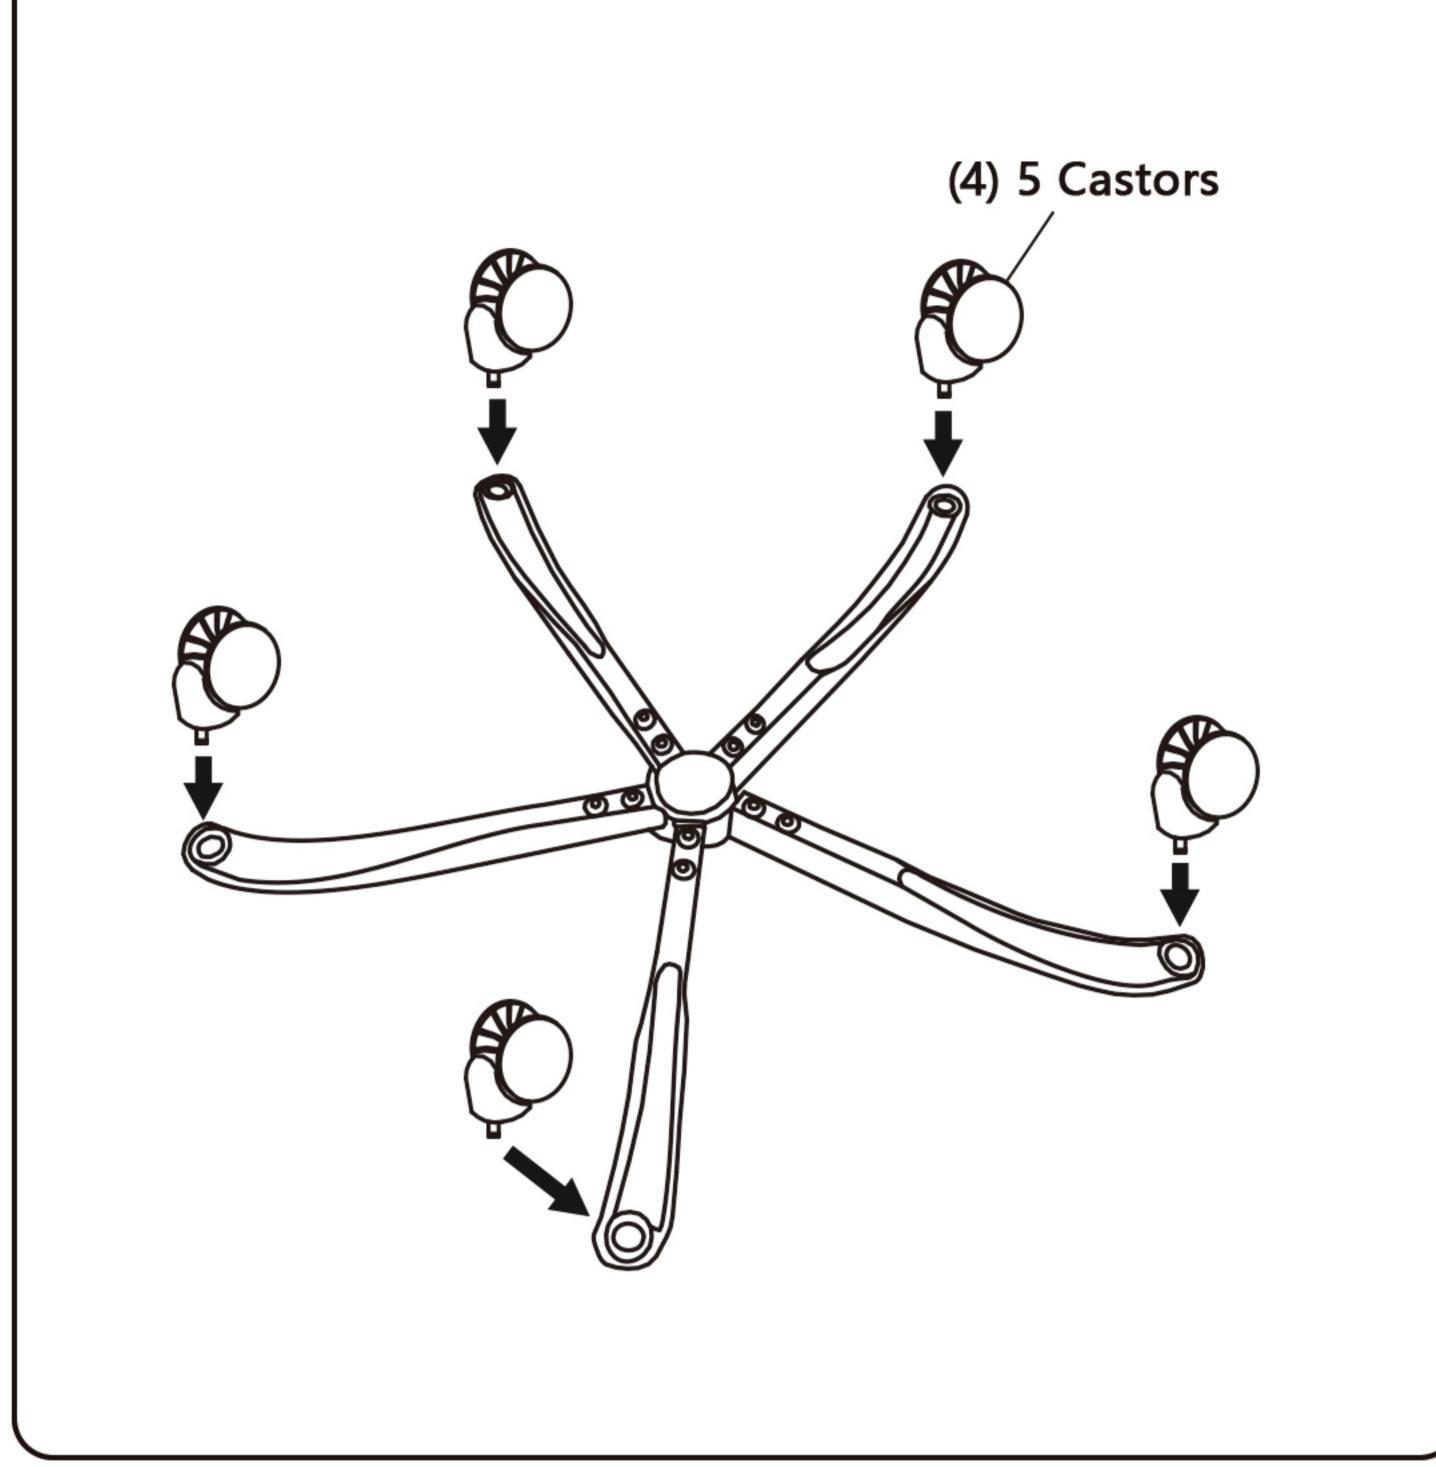

#### Step 3


Put Air Rod (5) into the hole of the central base tube as shown.

\* Caution: Please insert Air Rod (5) straightly, and then press Air Rod (5)

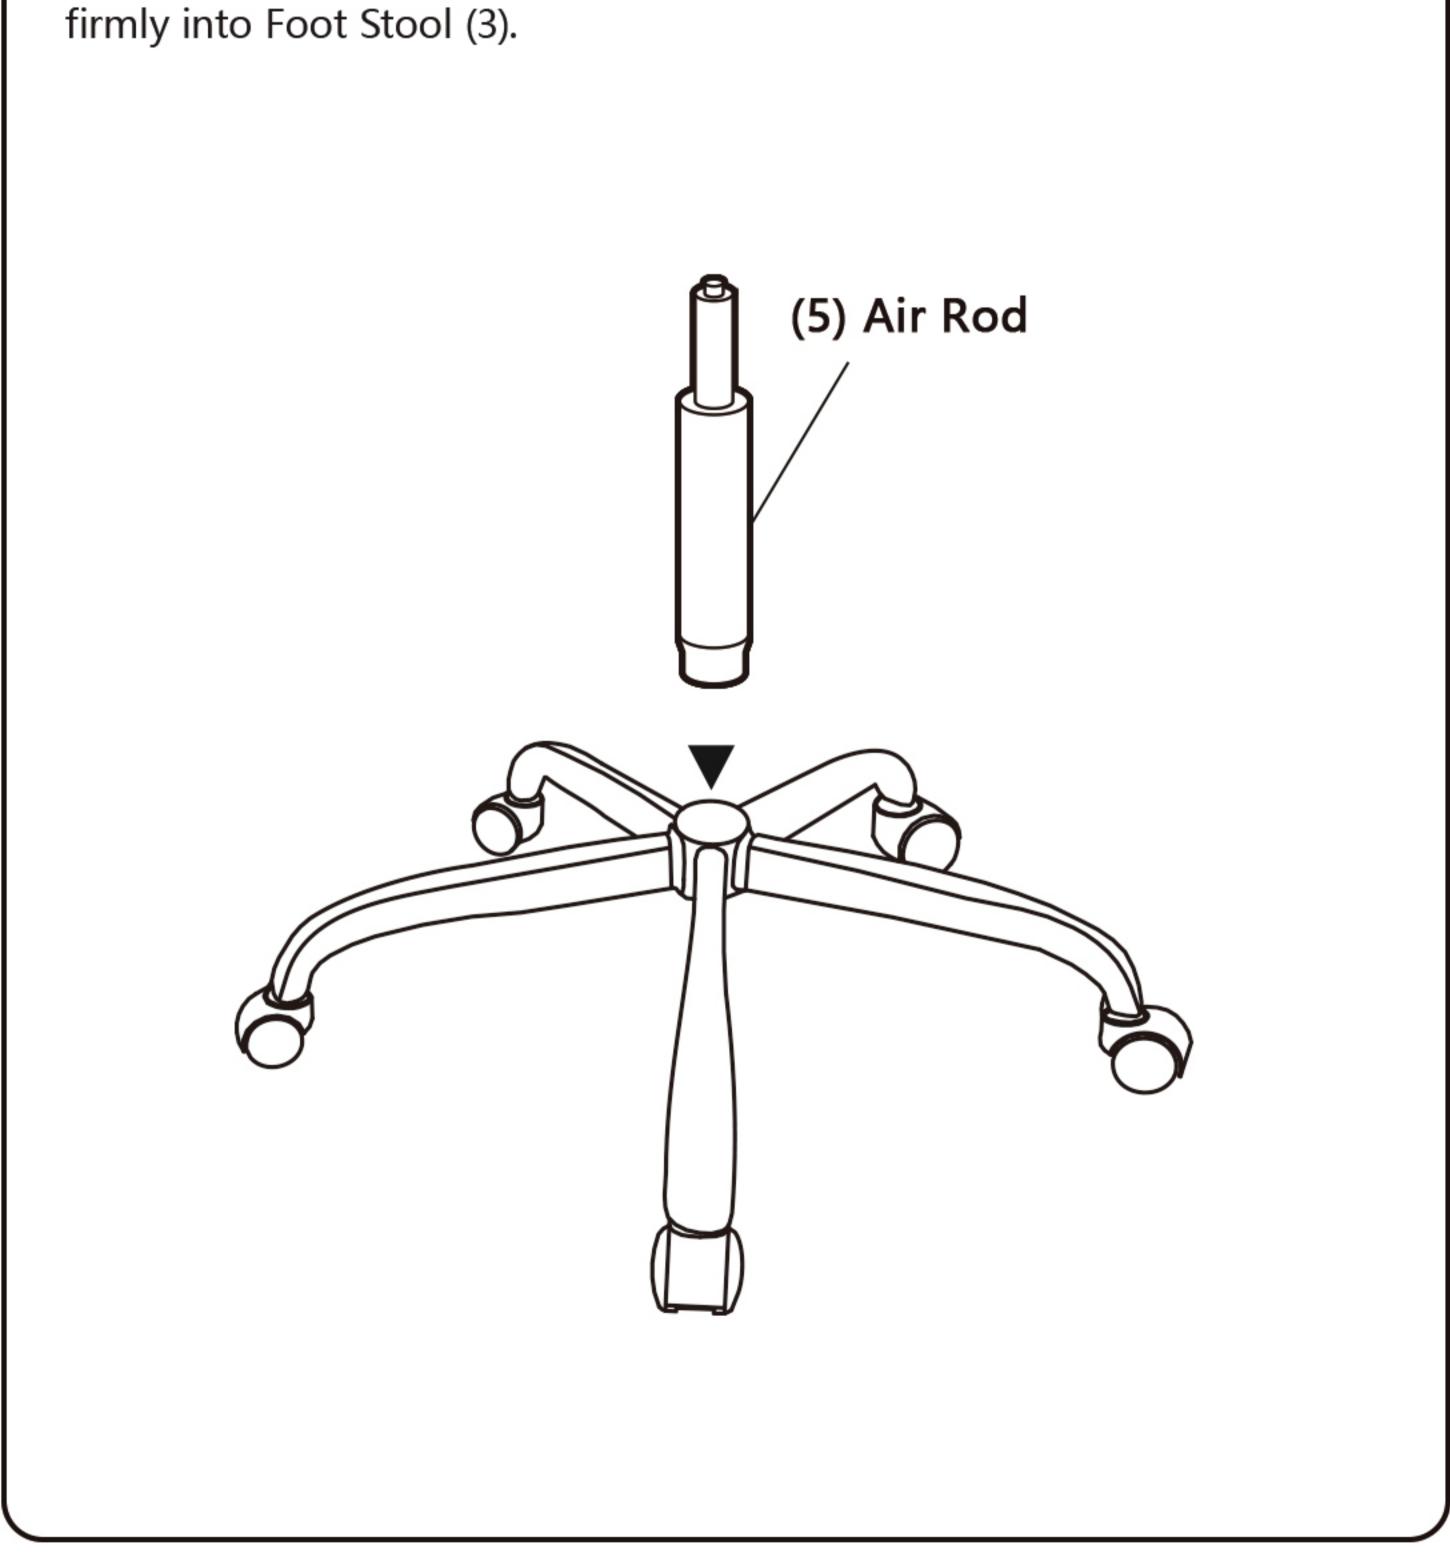


# Step 4

Insert the Foot Ring (15) into the assembled Air Rod (5) at your desired height. But at least one inch from the top of the outer circle of the Air Rod (5) as shown. Please follow the shown direction of the arrow to tighten the knob by hand on the Foot Ring (15). Then put it aside and we will use it in Step 8.

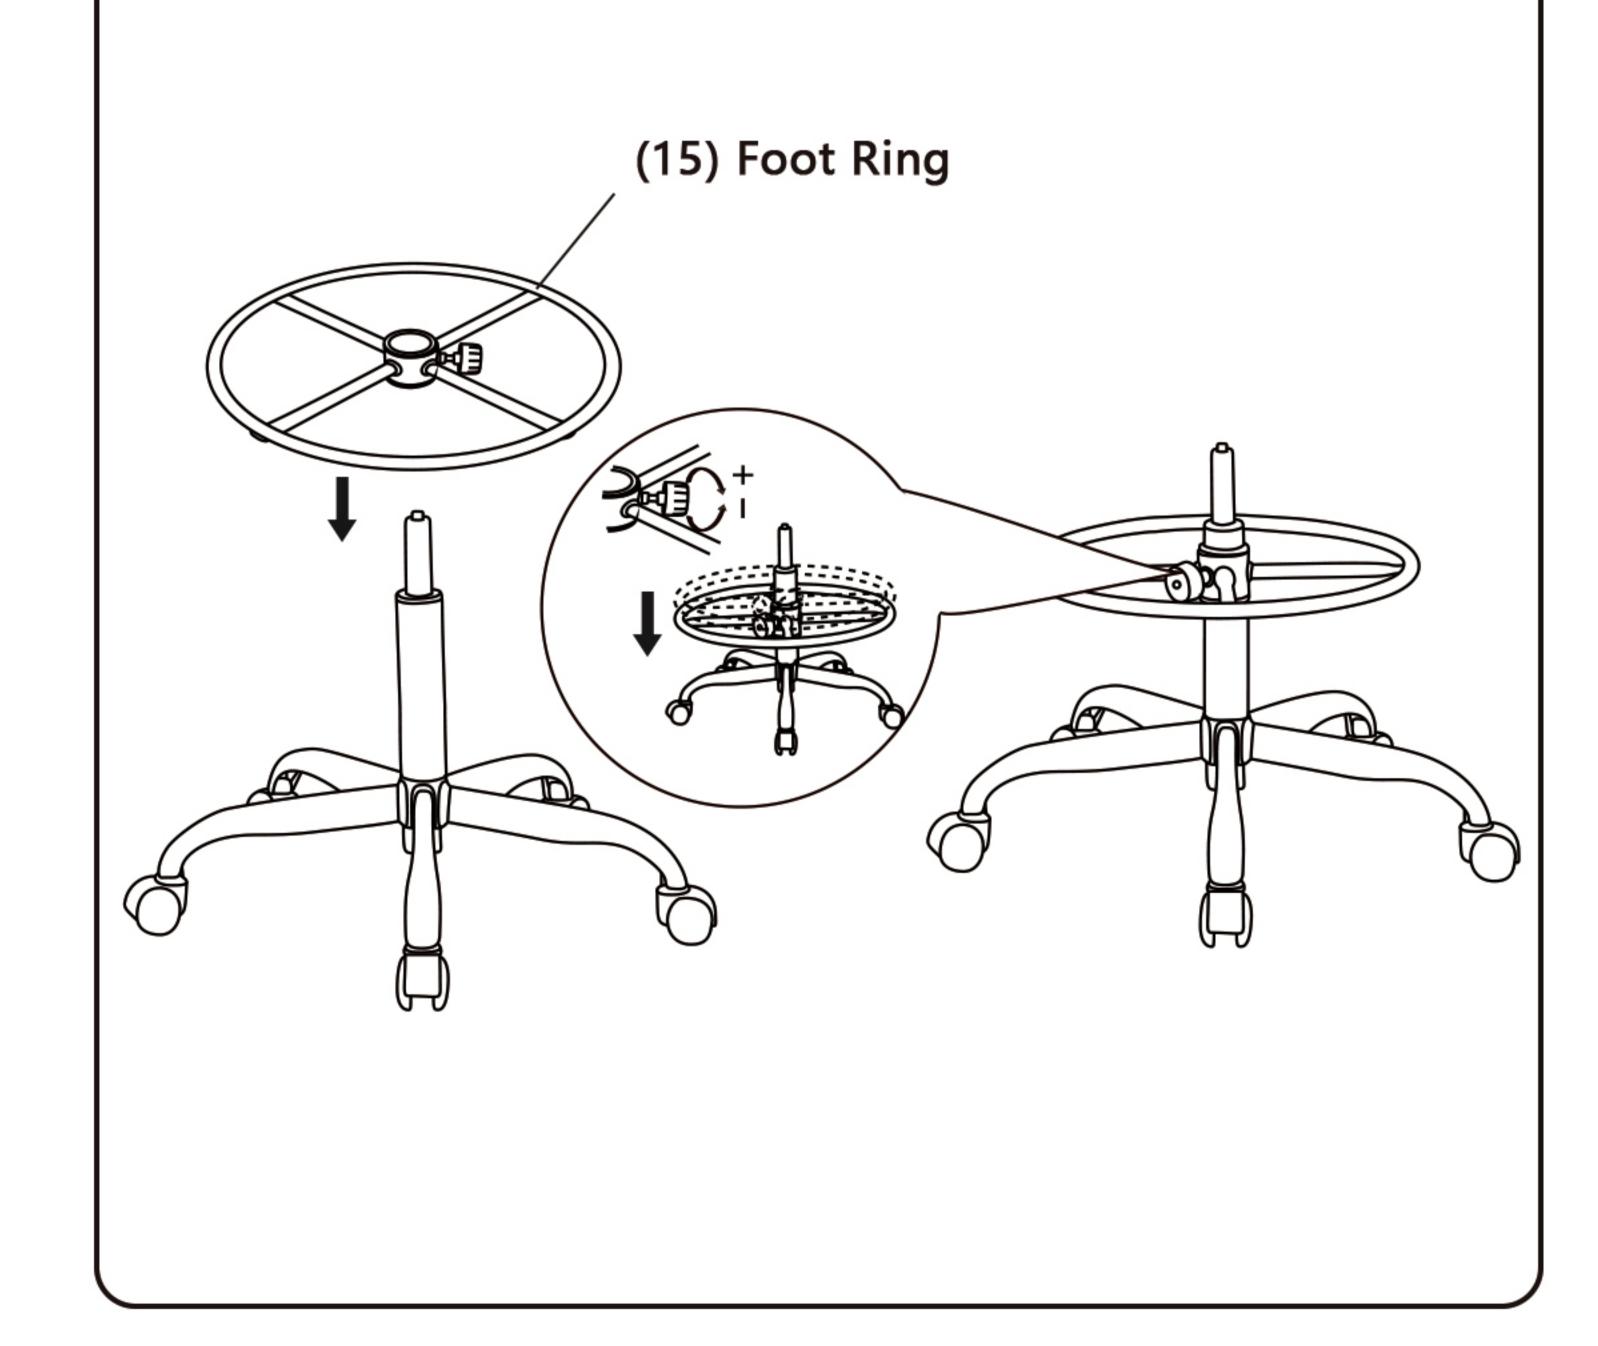

## Step 5


Tighten the Screws M6X30mm (8) with Hexagon Wrench (12) to fix 2 Armrests (6) to the back of the Backrest (1). Tighten the 4 screws firmly and then cover the screws with 4 Decoration Caps (13).

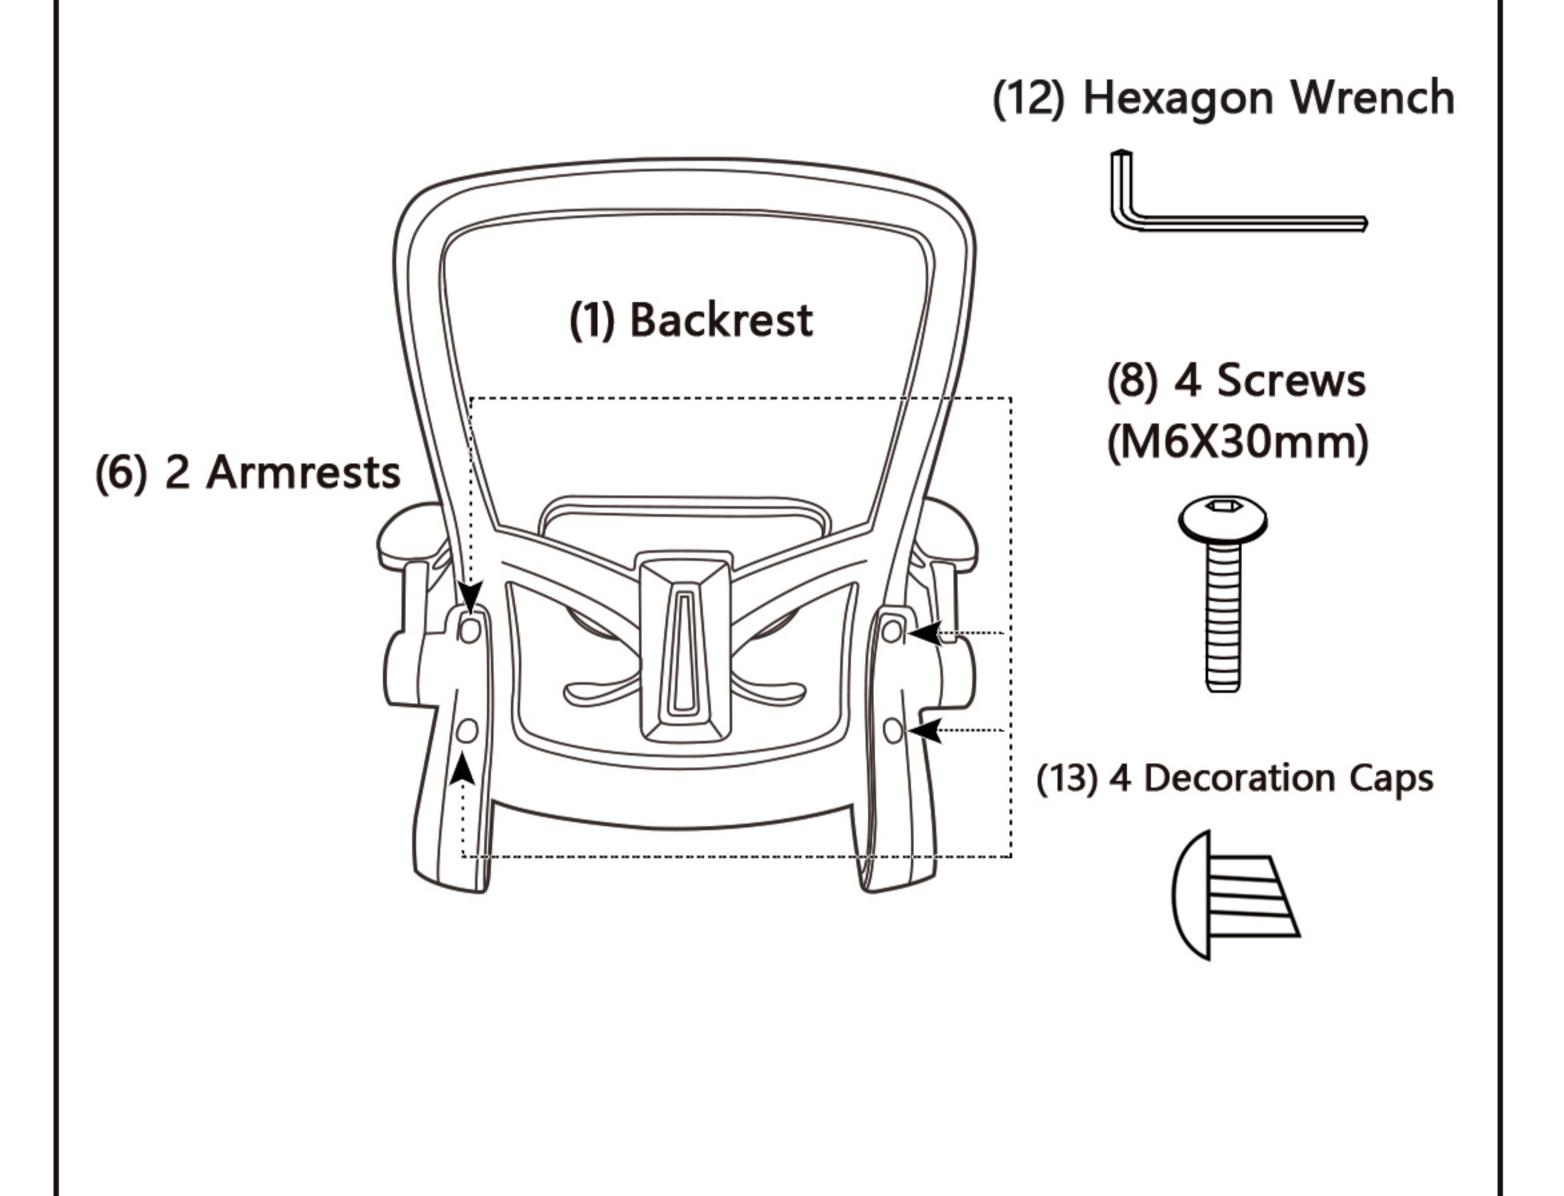

## Step 6

After Step 5, fix the bottom of the Armrests (6) to the back of the Seat Cushion (2). Tighten the 4 Screws M6X35mm (9) and 4 Gaskets (14) with Hexagon Wrench (12) firmly.

\* Caution: There is a FRONT sticker on the front of the Seat Cushion (2).

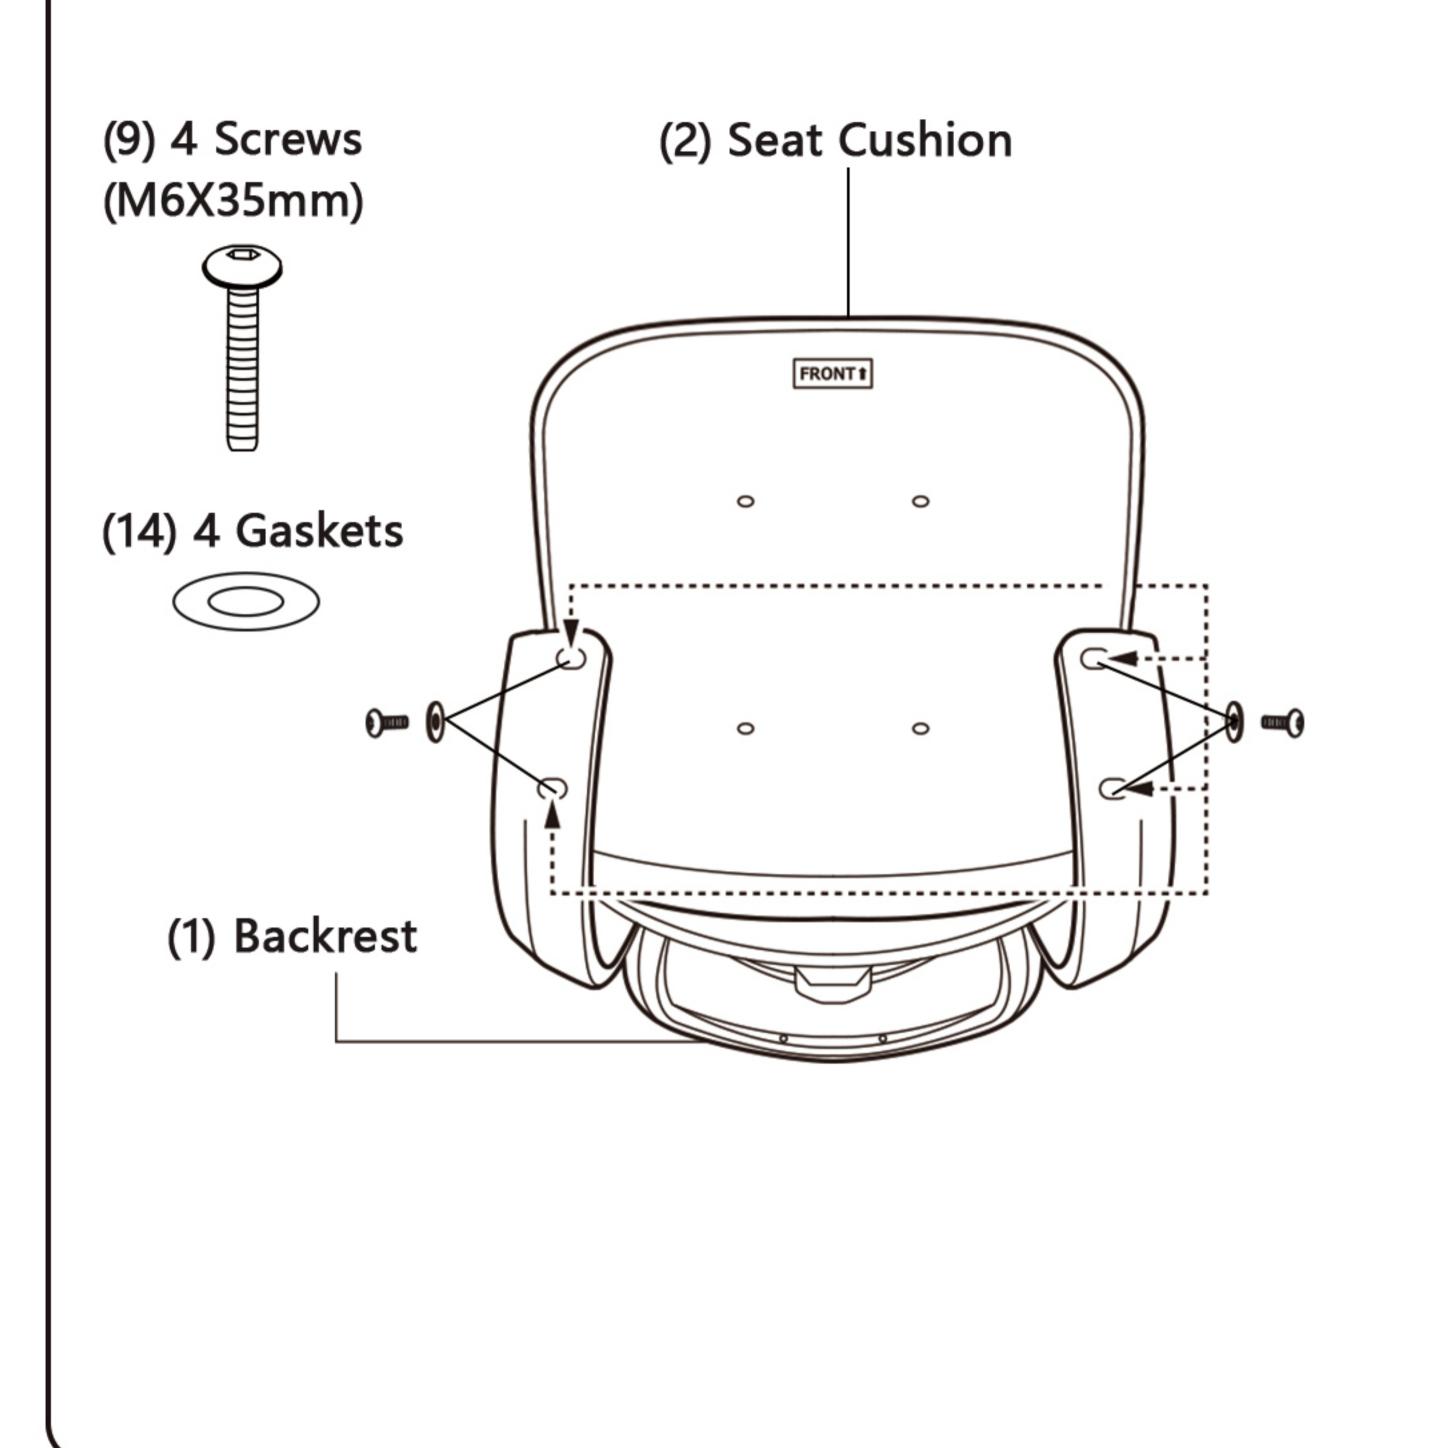

## Step 7

Fix the Base Plate (7) to the bottom of the Seat Cushion (2).

Tighten the Screws M6X18mm (10) with Hexagon Wrench (12) firmly.

Caution: There is a FRONT letter print on the front of the Base Plate (7).

(10) 4 Screws (M6X18mm)

(7) Base Plate

## Step 8

Pick up the Step 4's Air Rod (5) and Foot Stool (3). Insert the Air Rod (5) into Step 7's Base Plate (7). There's a hole in the middle of the Base Plate (7). Press the Seat Cushion (2) from top to bottom, and use your whole body's strength to insert it firmly the assembly is complete now.

