




80064 Product Installation Instructions

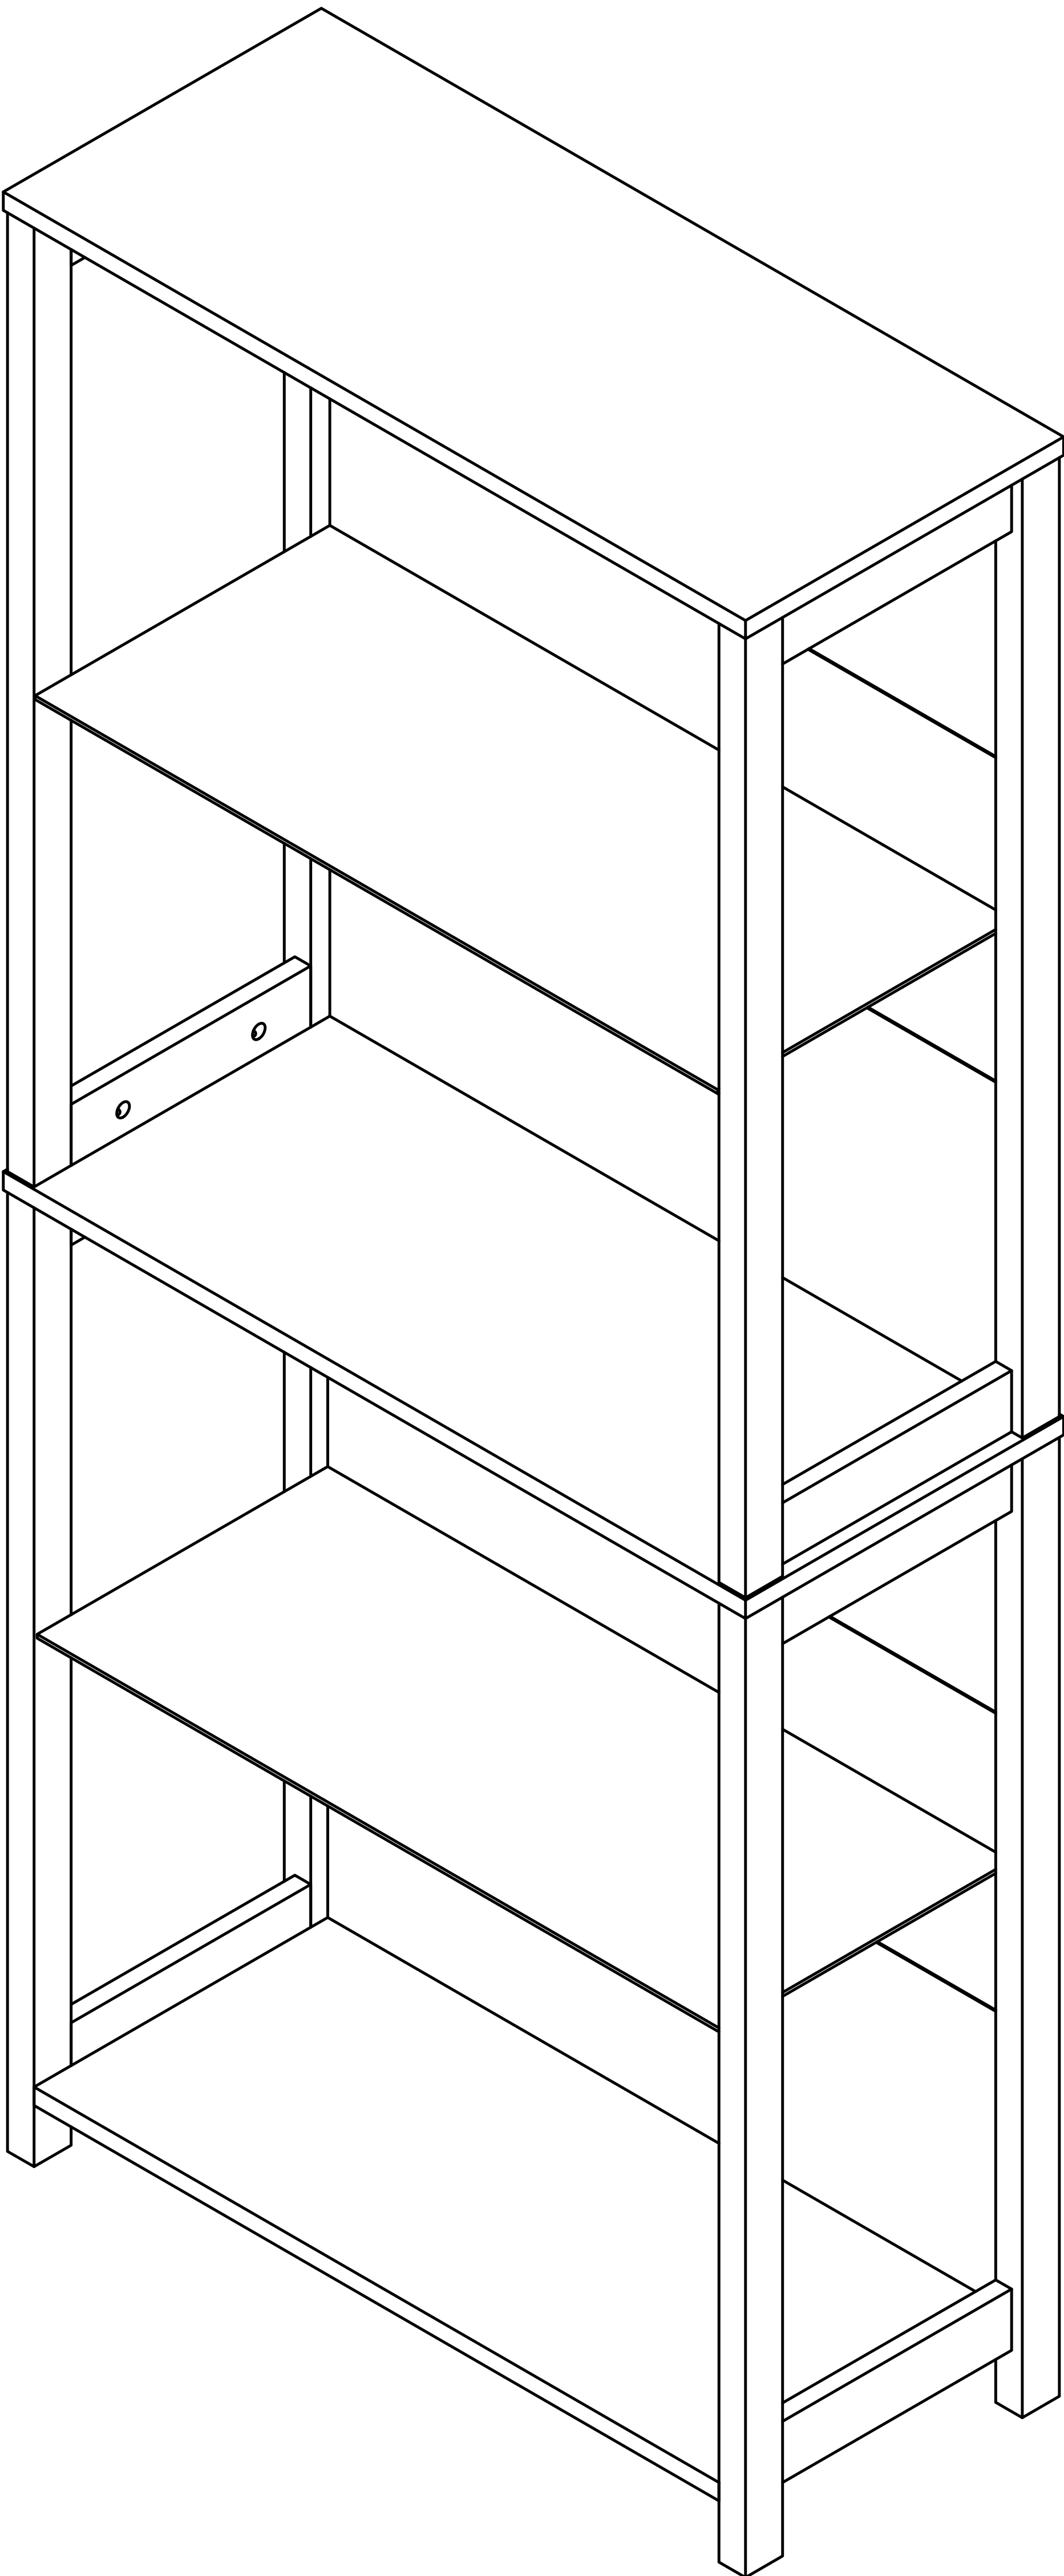


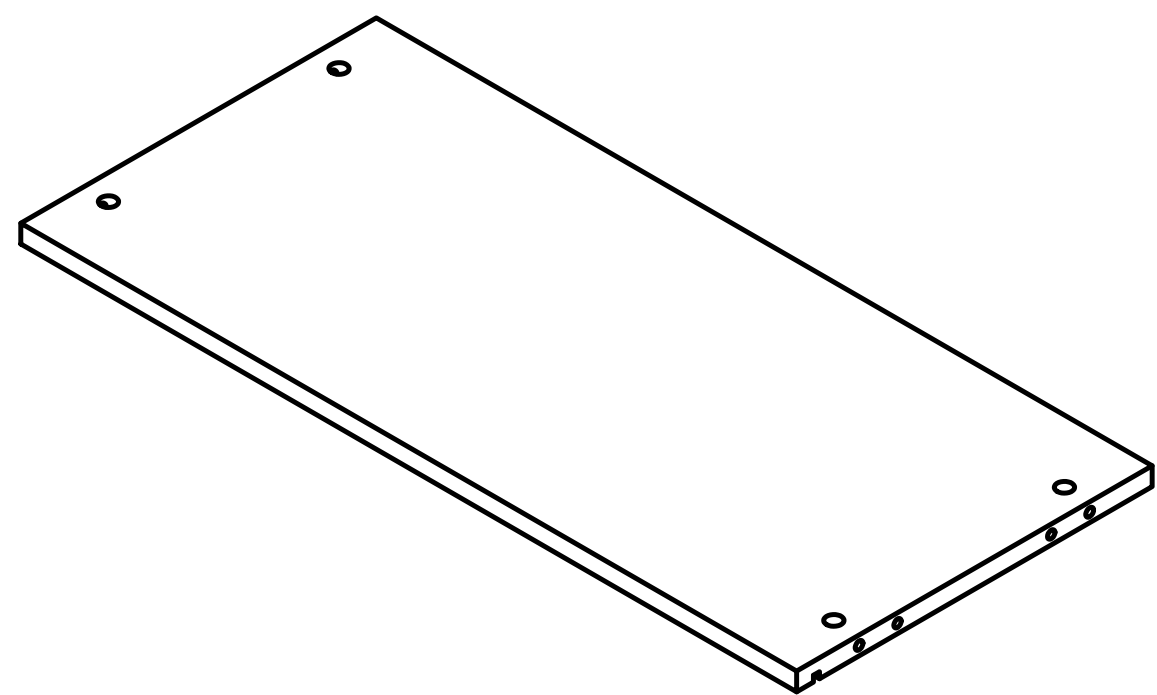


Ax1

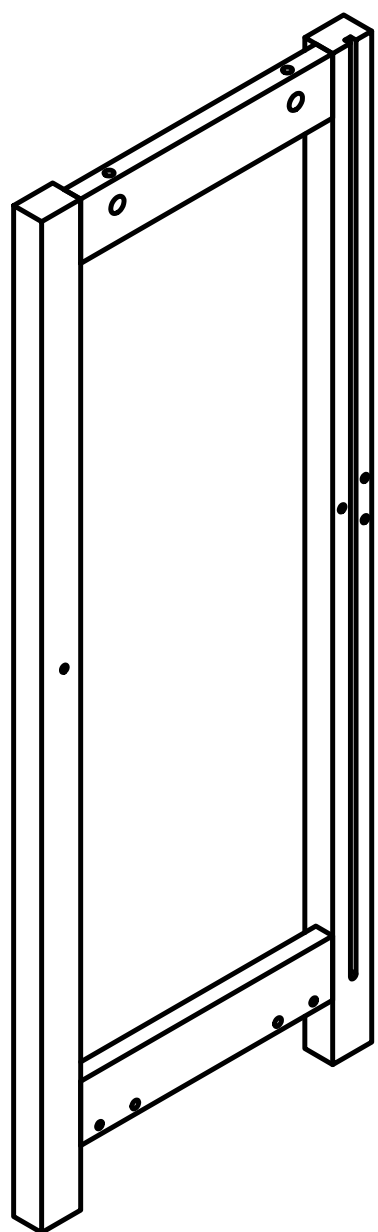


Bx1

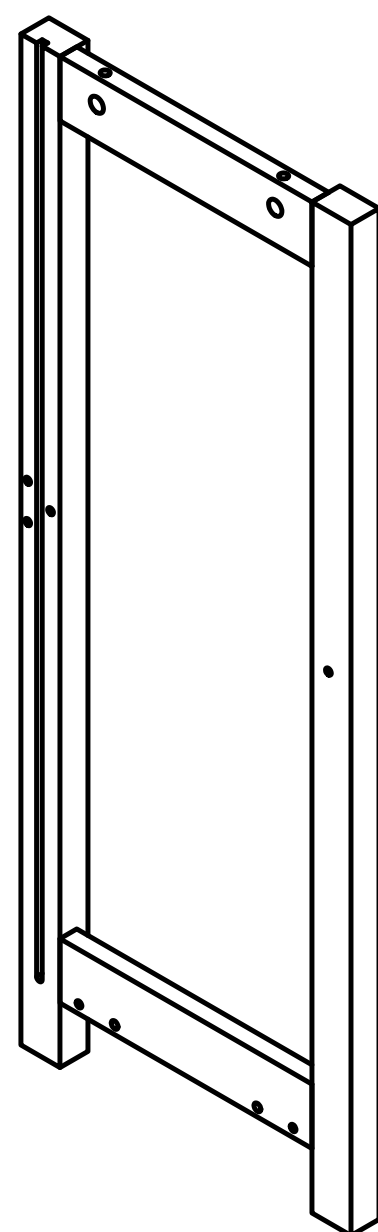


Cx1

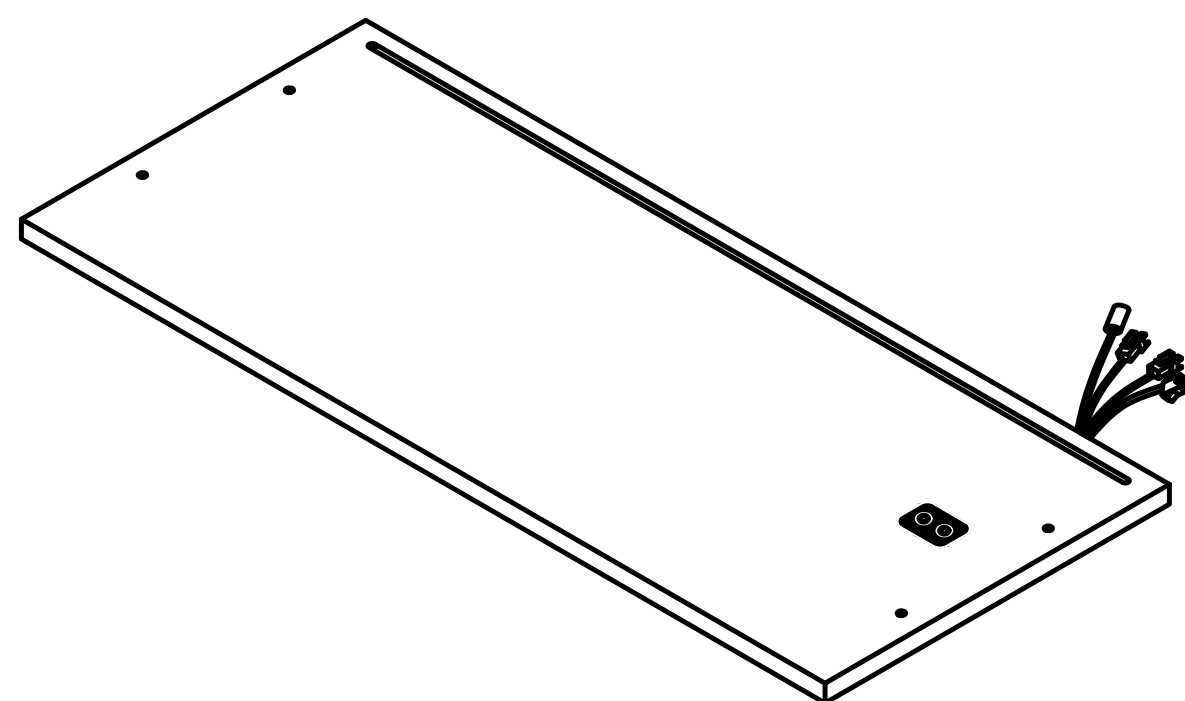


Dx1

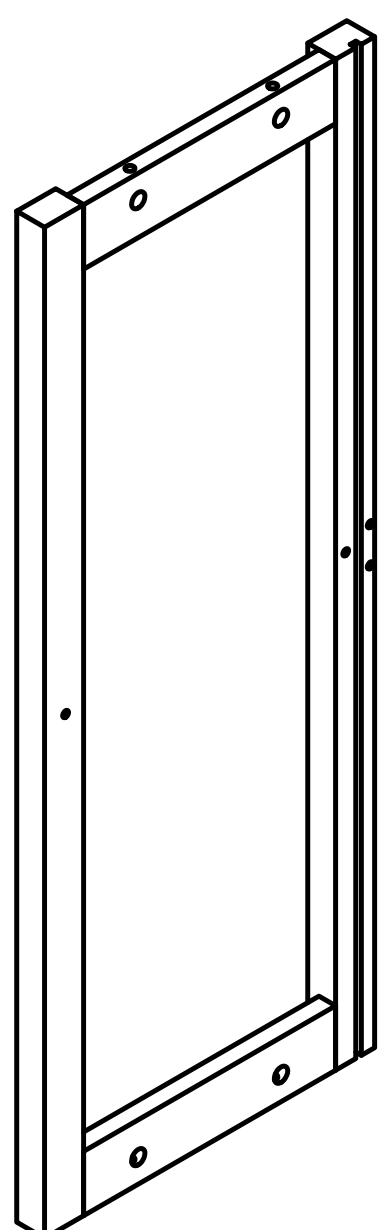


Ex2

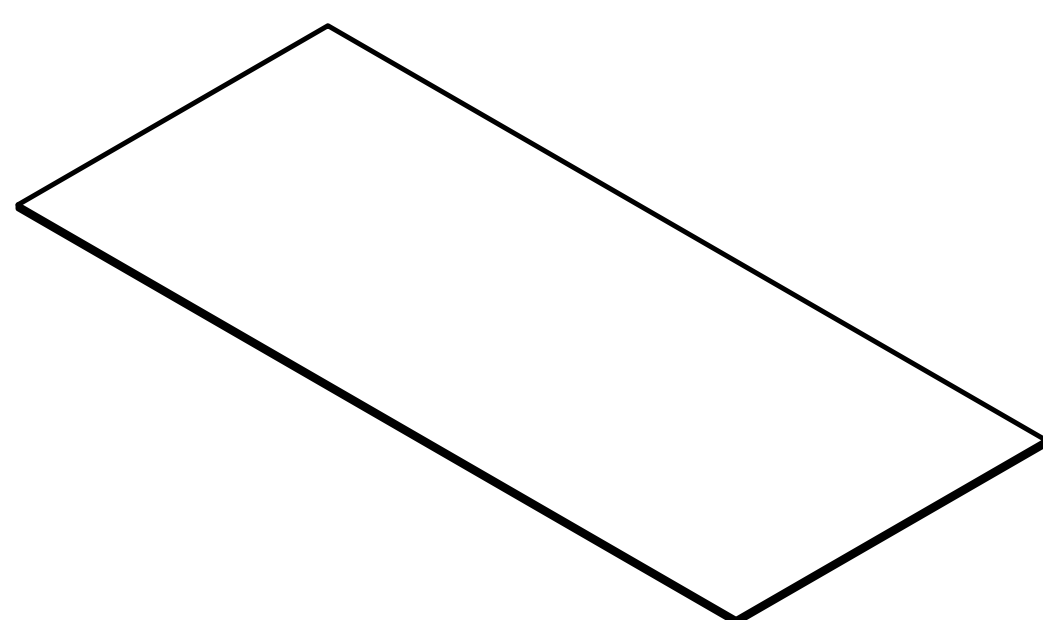


Fx2

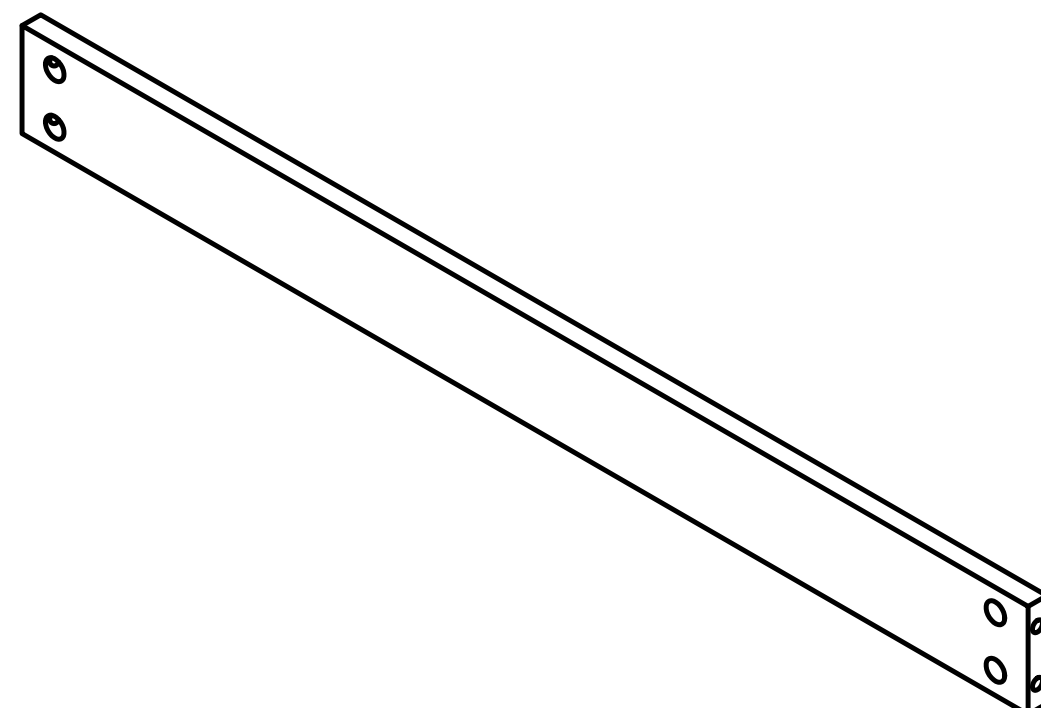


Gx2

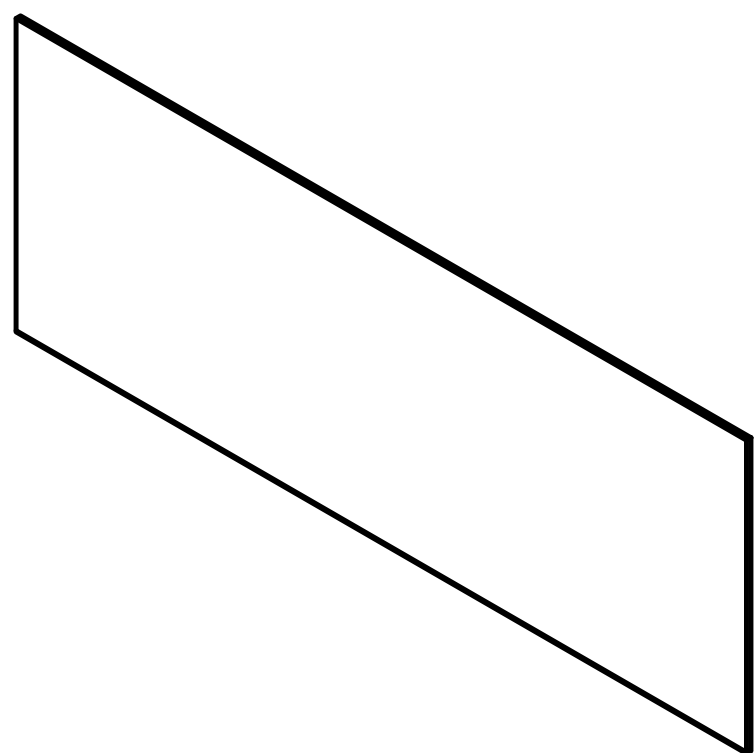


Hx3

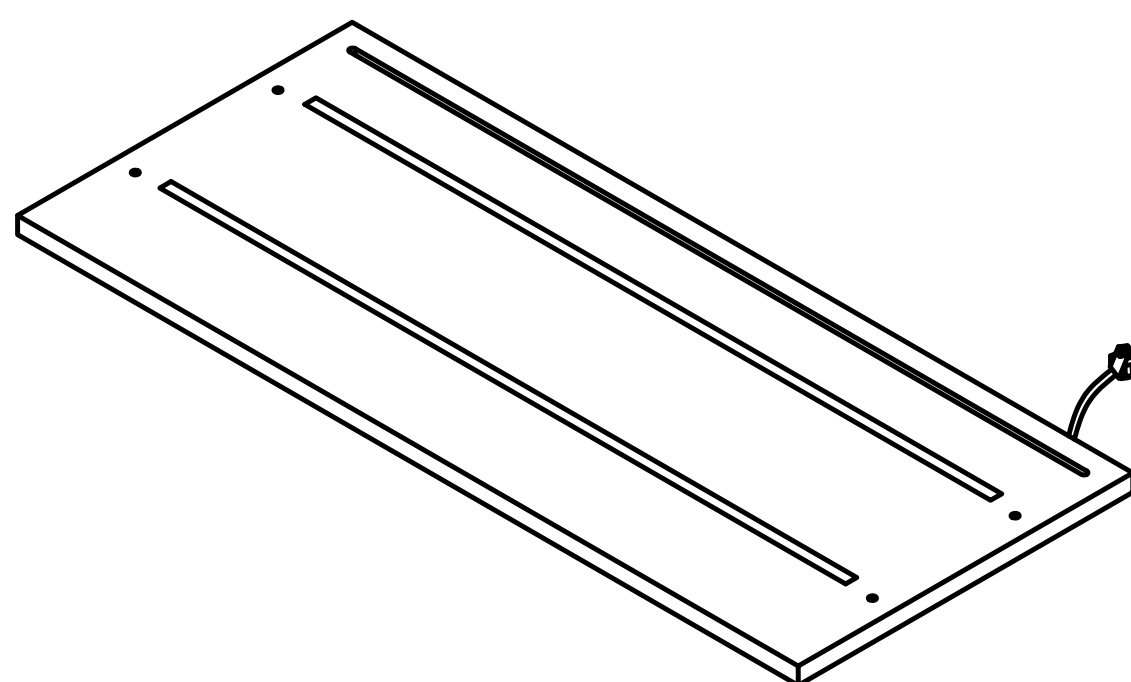














I x1

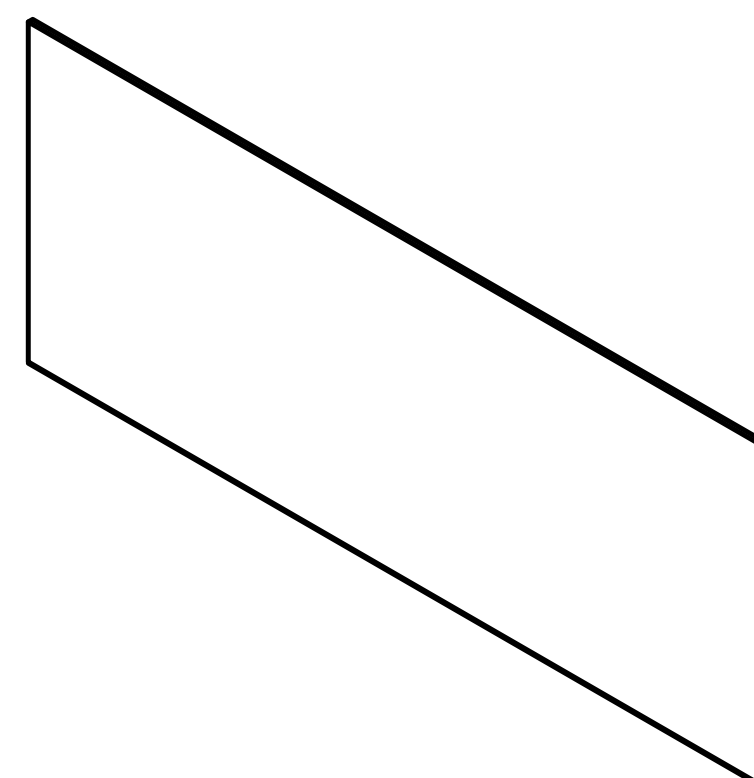


Jx3

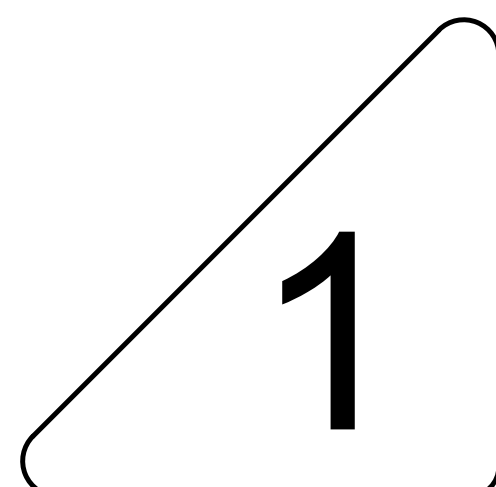

1

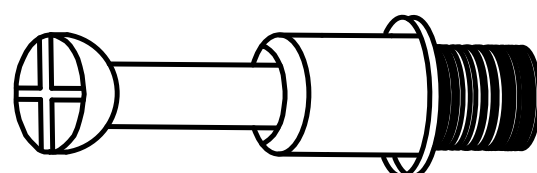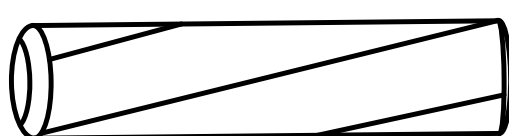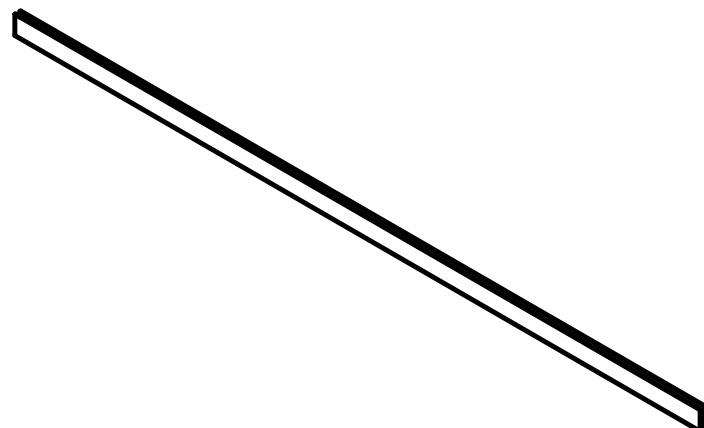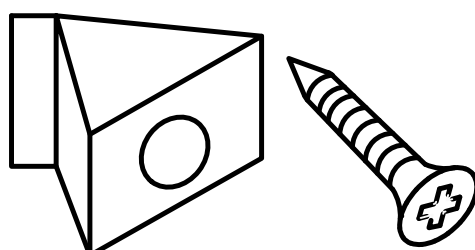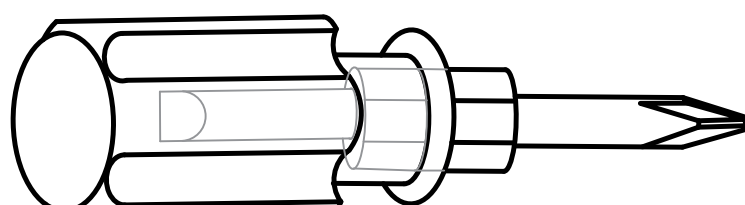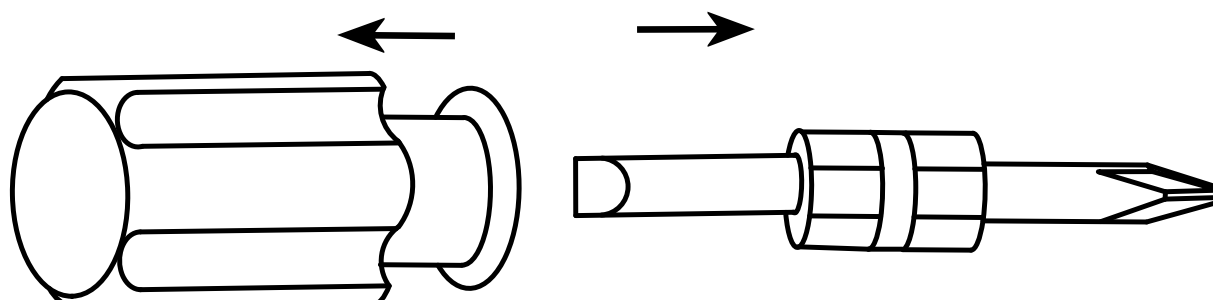
Accessories list						
①		Two in one screw (6x28mm)			24pcs +3pcs	
②		Two in one nut (10x12mm)			24pcs +3pcs	
③		Wood chipping (6x30mm)			4pcs +2pcs	
④		Non-slip pads (25x25)			4pcs +2pcs	
⑤		Backboard card strip(644mm)			4pcs	
⑥		Wire clamp			3pcs +1pcs	
⑦		Fixing clip & screw (3x16mm)			20pcs +3pcs	
⑧		Laminate Support Nail			8pcs +1pcs	
⑨	Anti Fall Hardware	 x2	(3. 5x14mm)  x2	 x2	 x2 (4x45mm)	 x4
	AC/DC Adapter (12V==2. 0A)			1pcs		
Double-head screwdriver, use as required   1pcs						
2						

Product structure decomposition

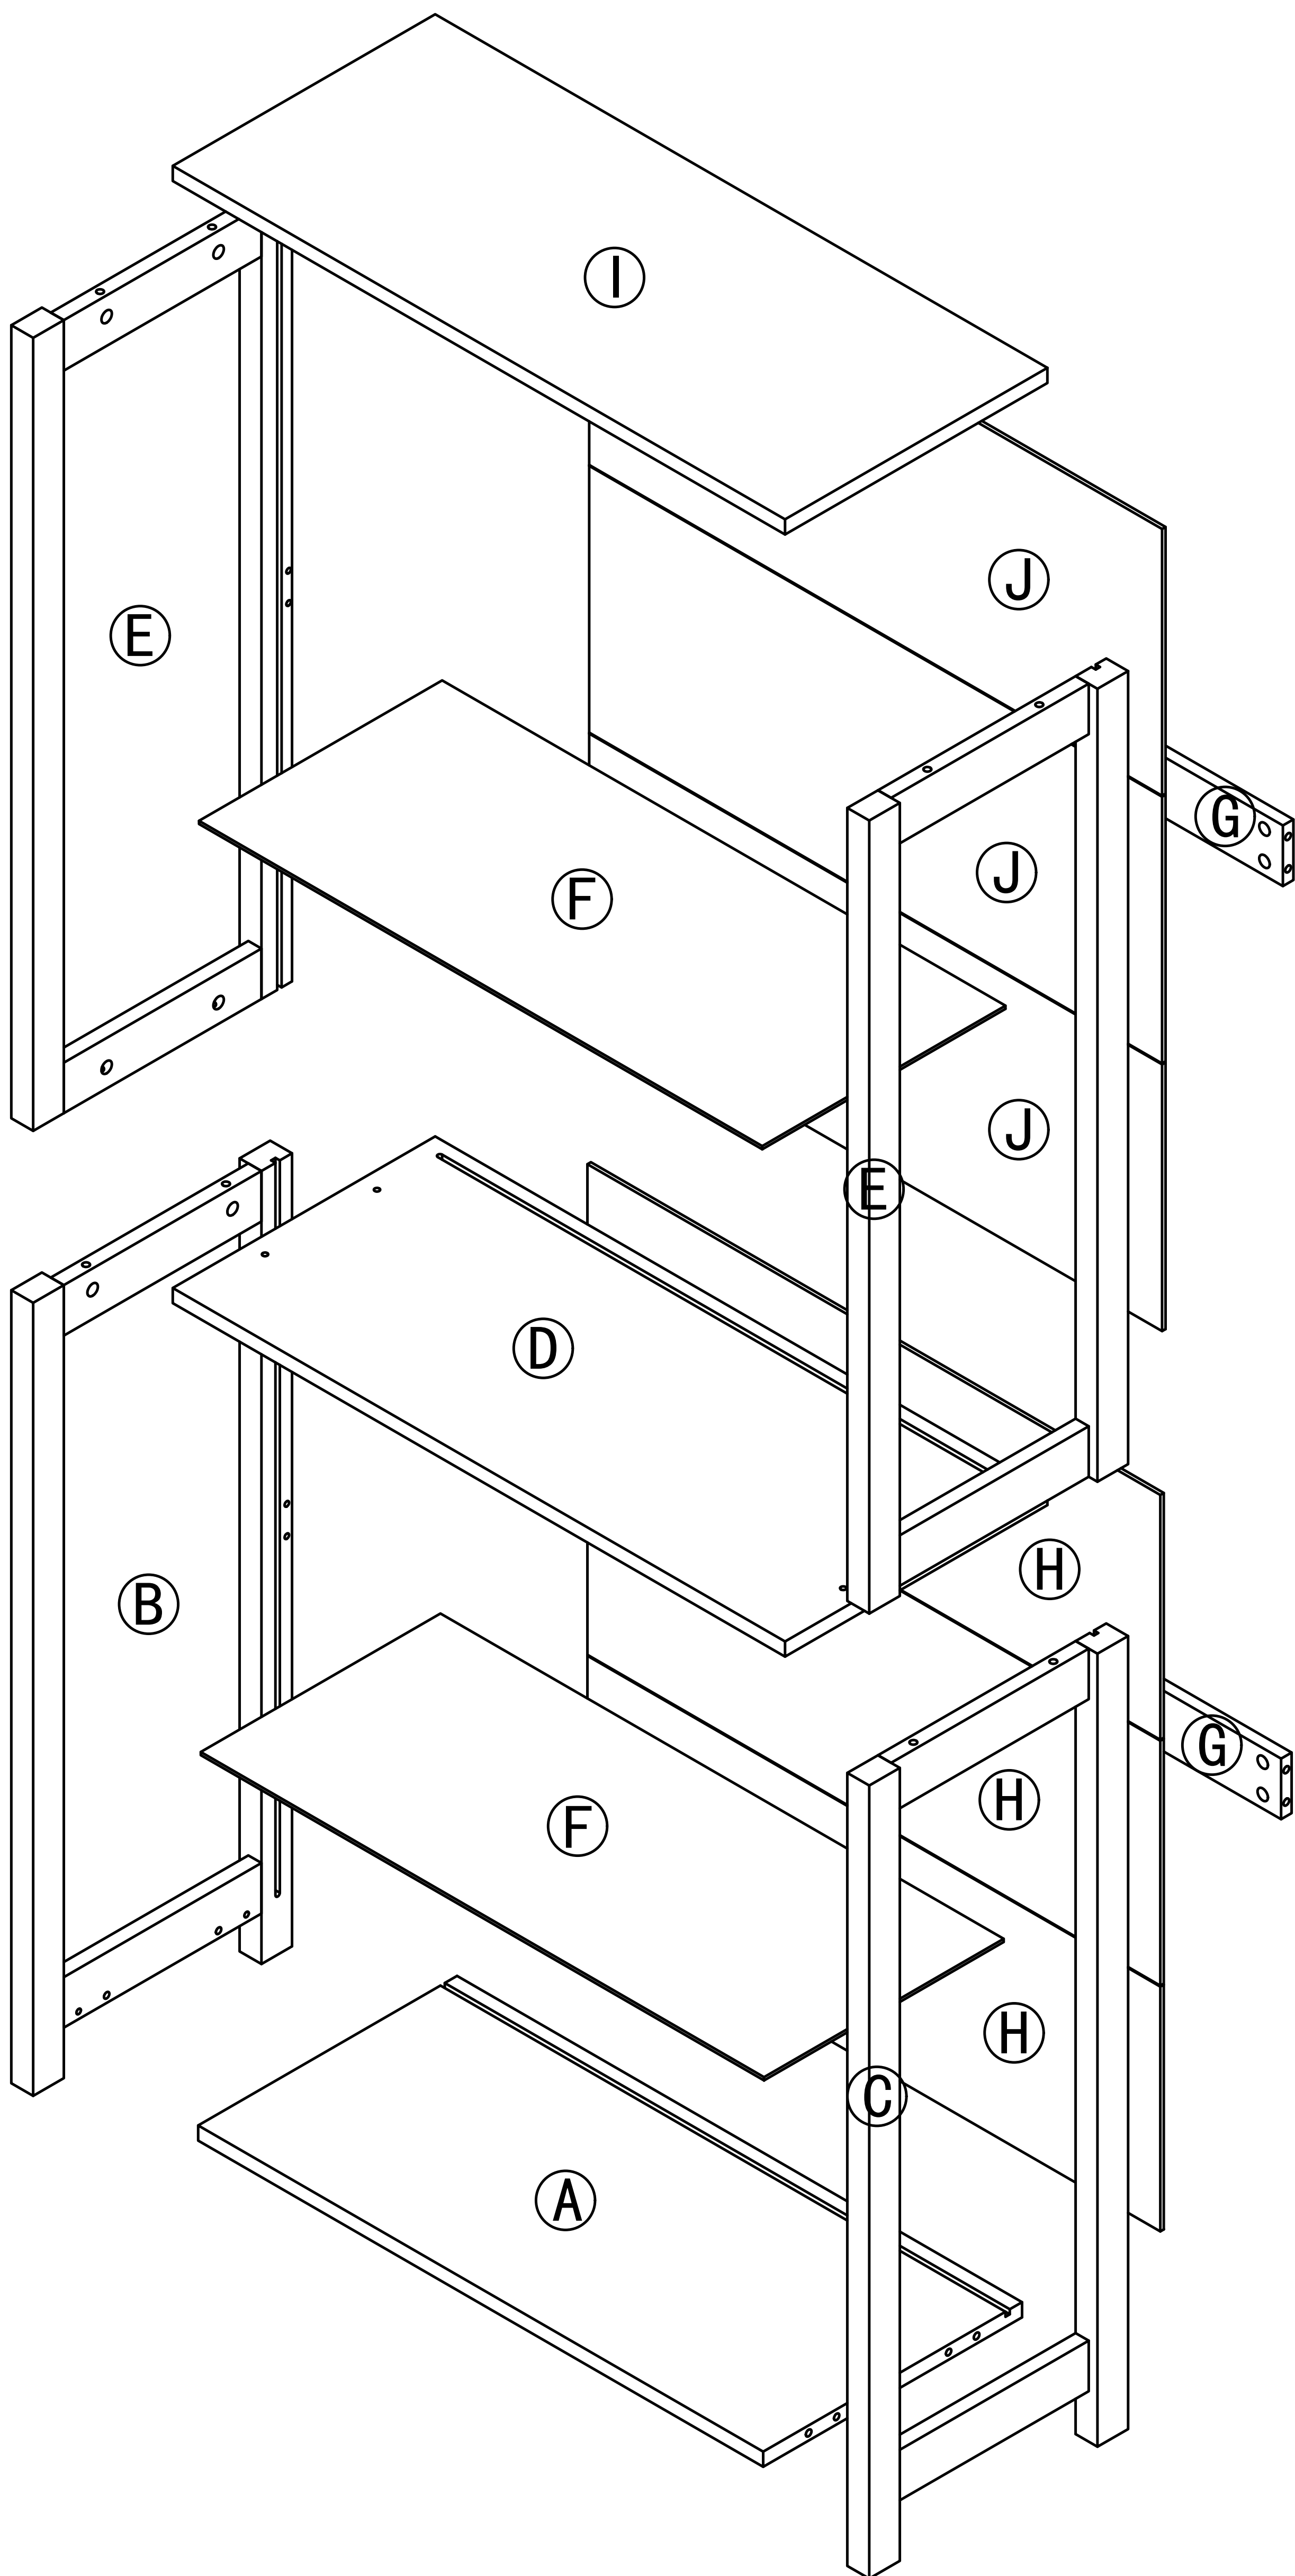


Use parts ① and ②




Step1

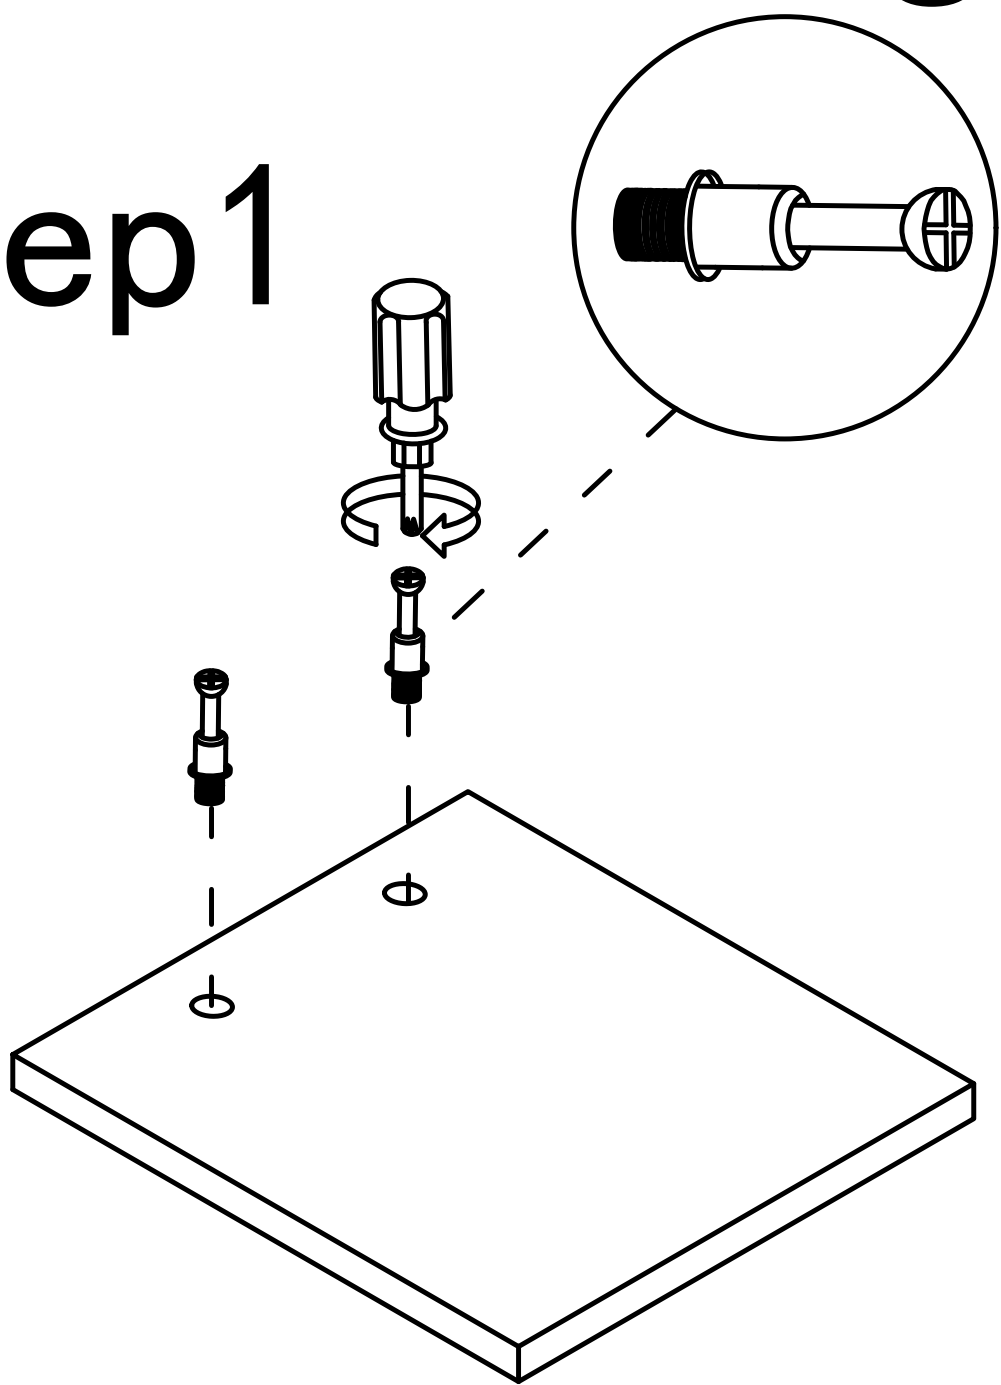

Step2

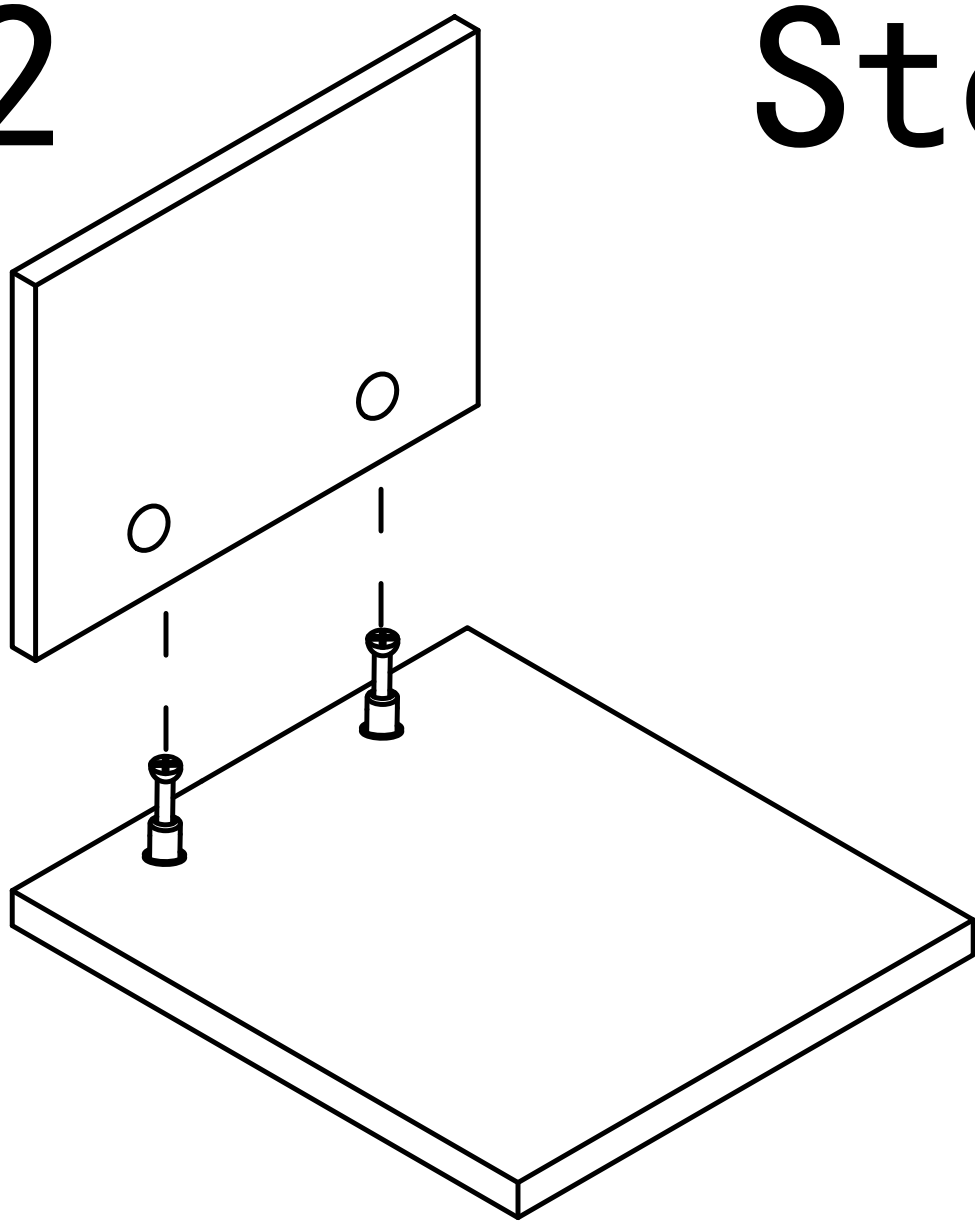


Step3

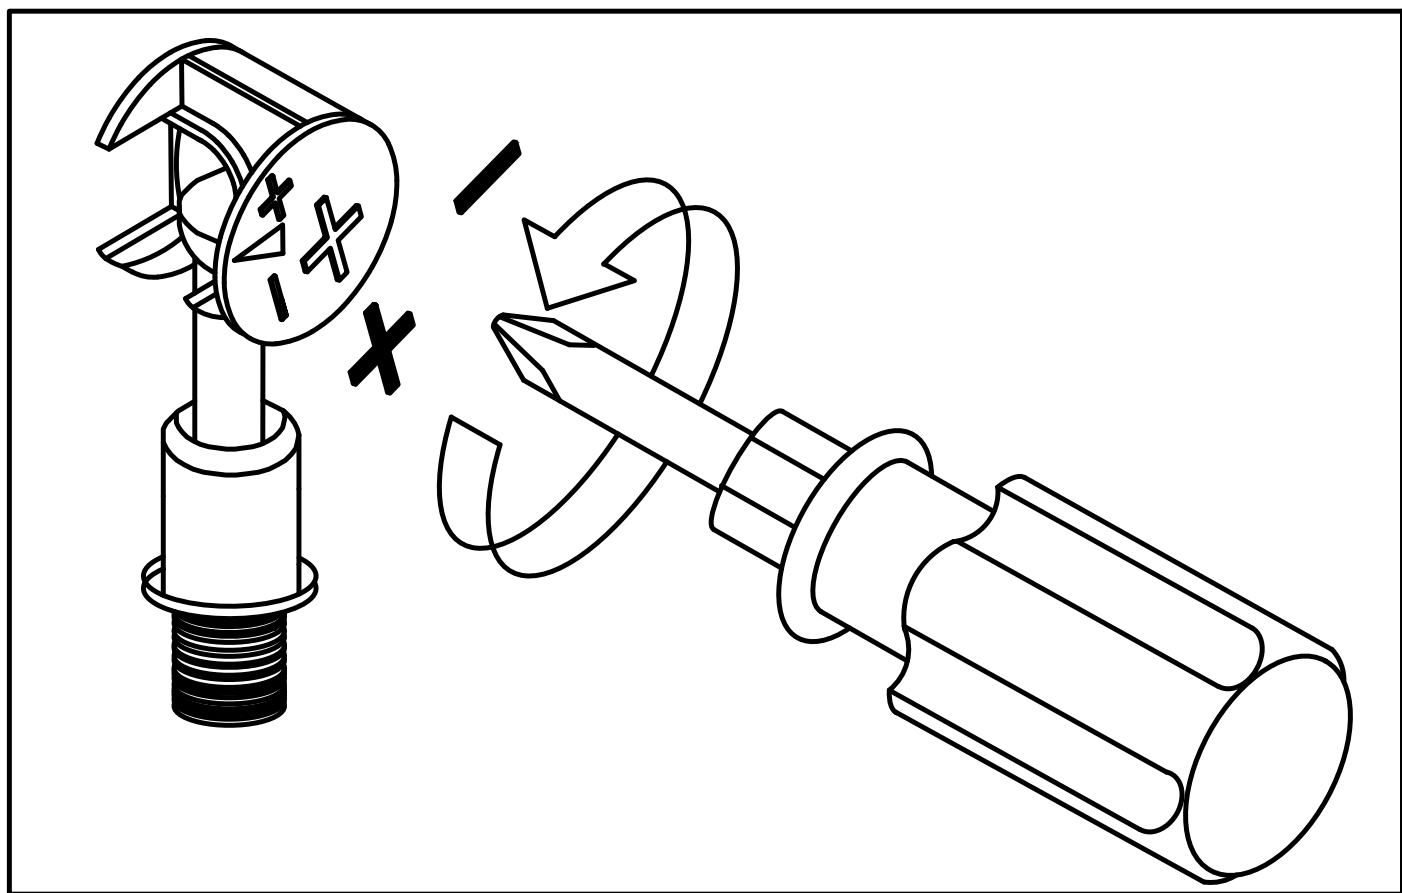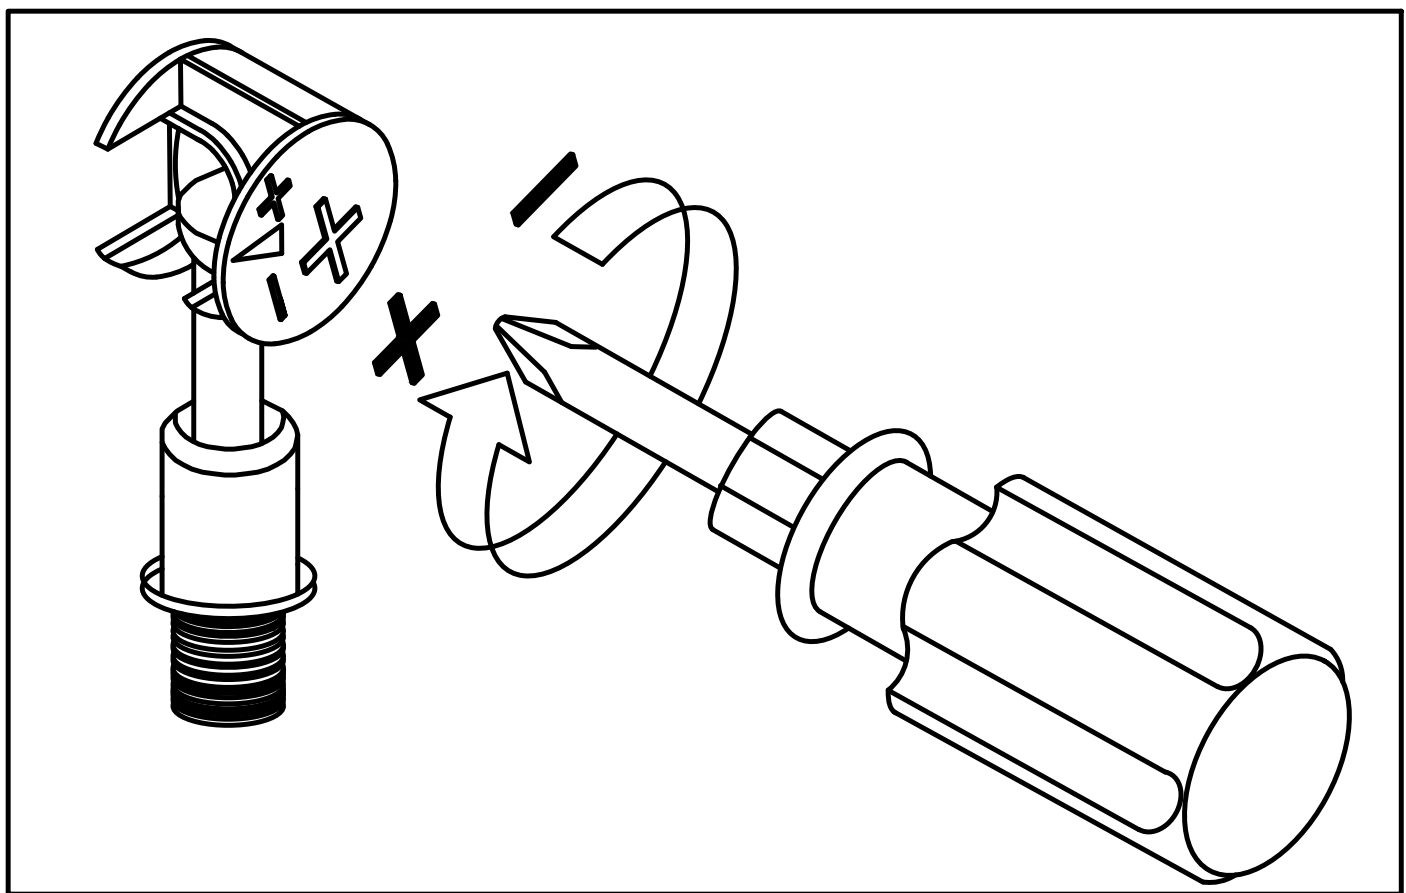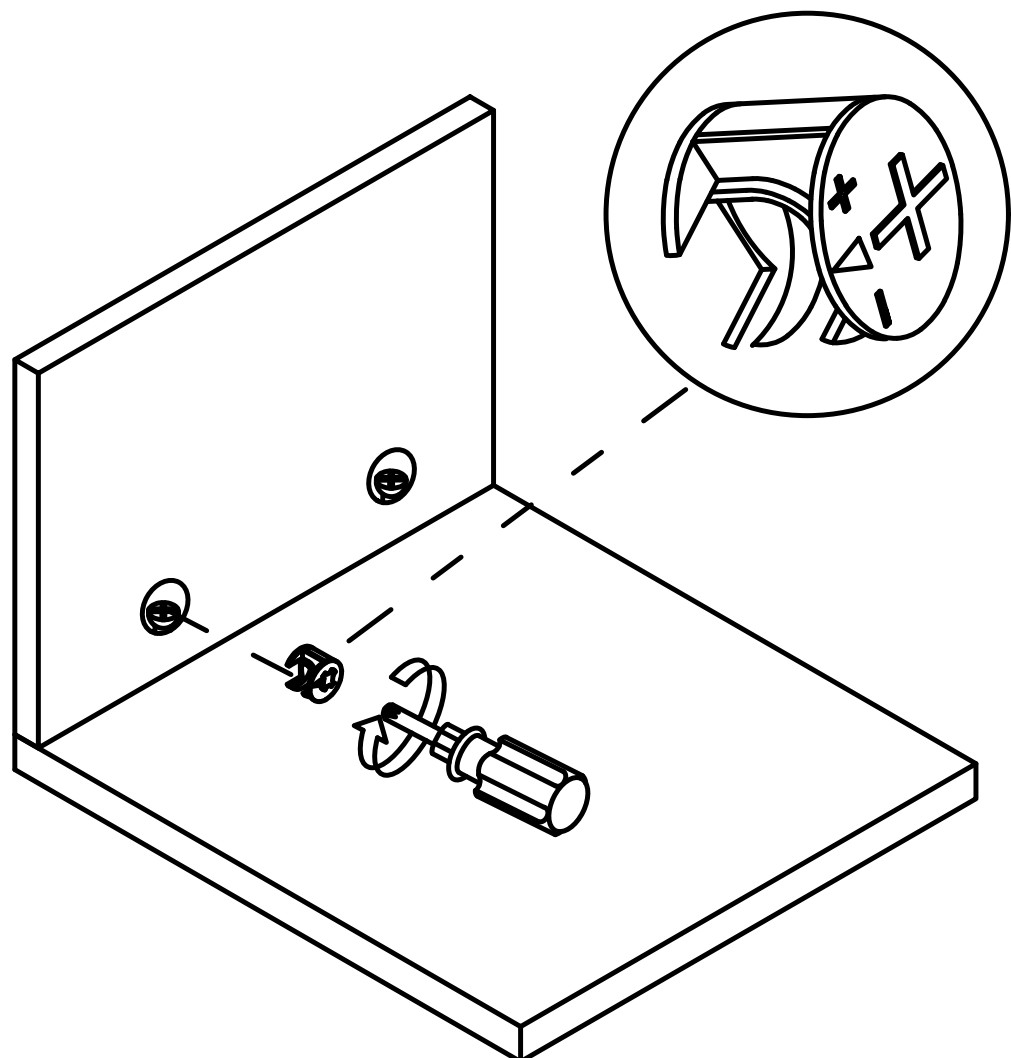


Use a screwdriver to lock in the direction of the "+" sign

Disassemble along the direction of "-" sign

Step 1

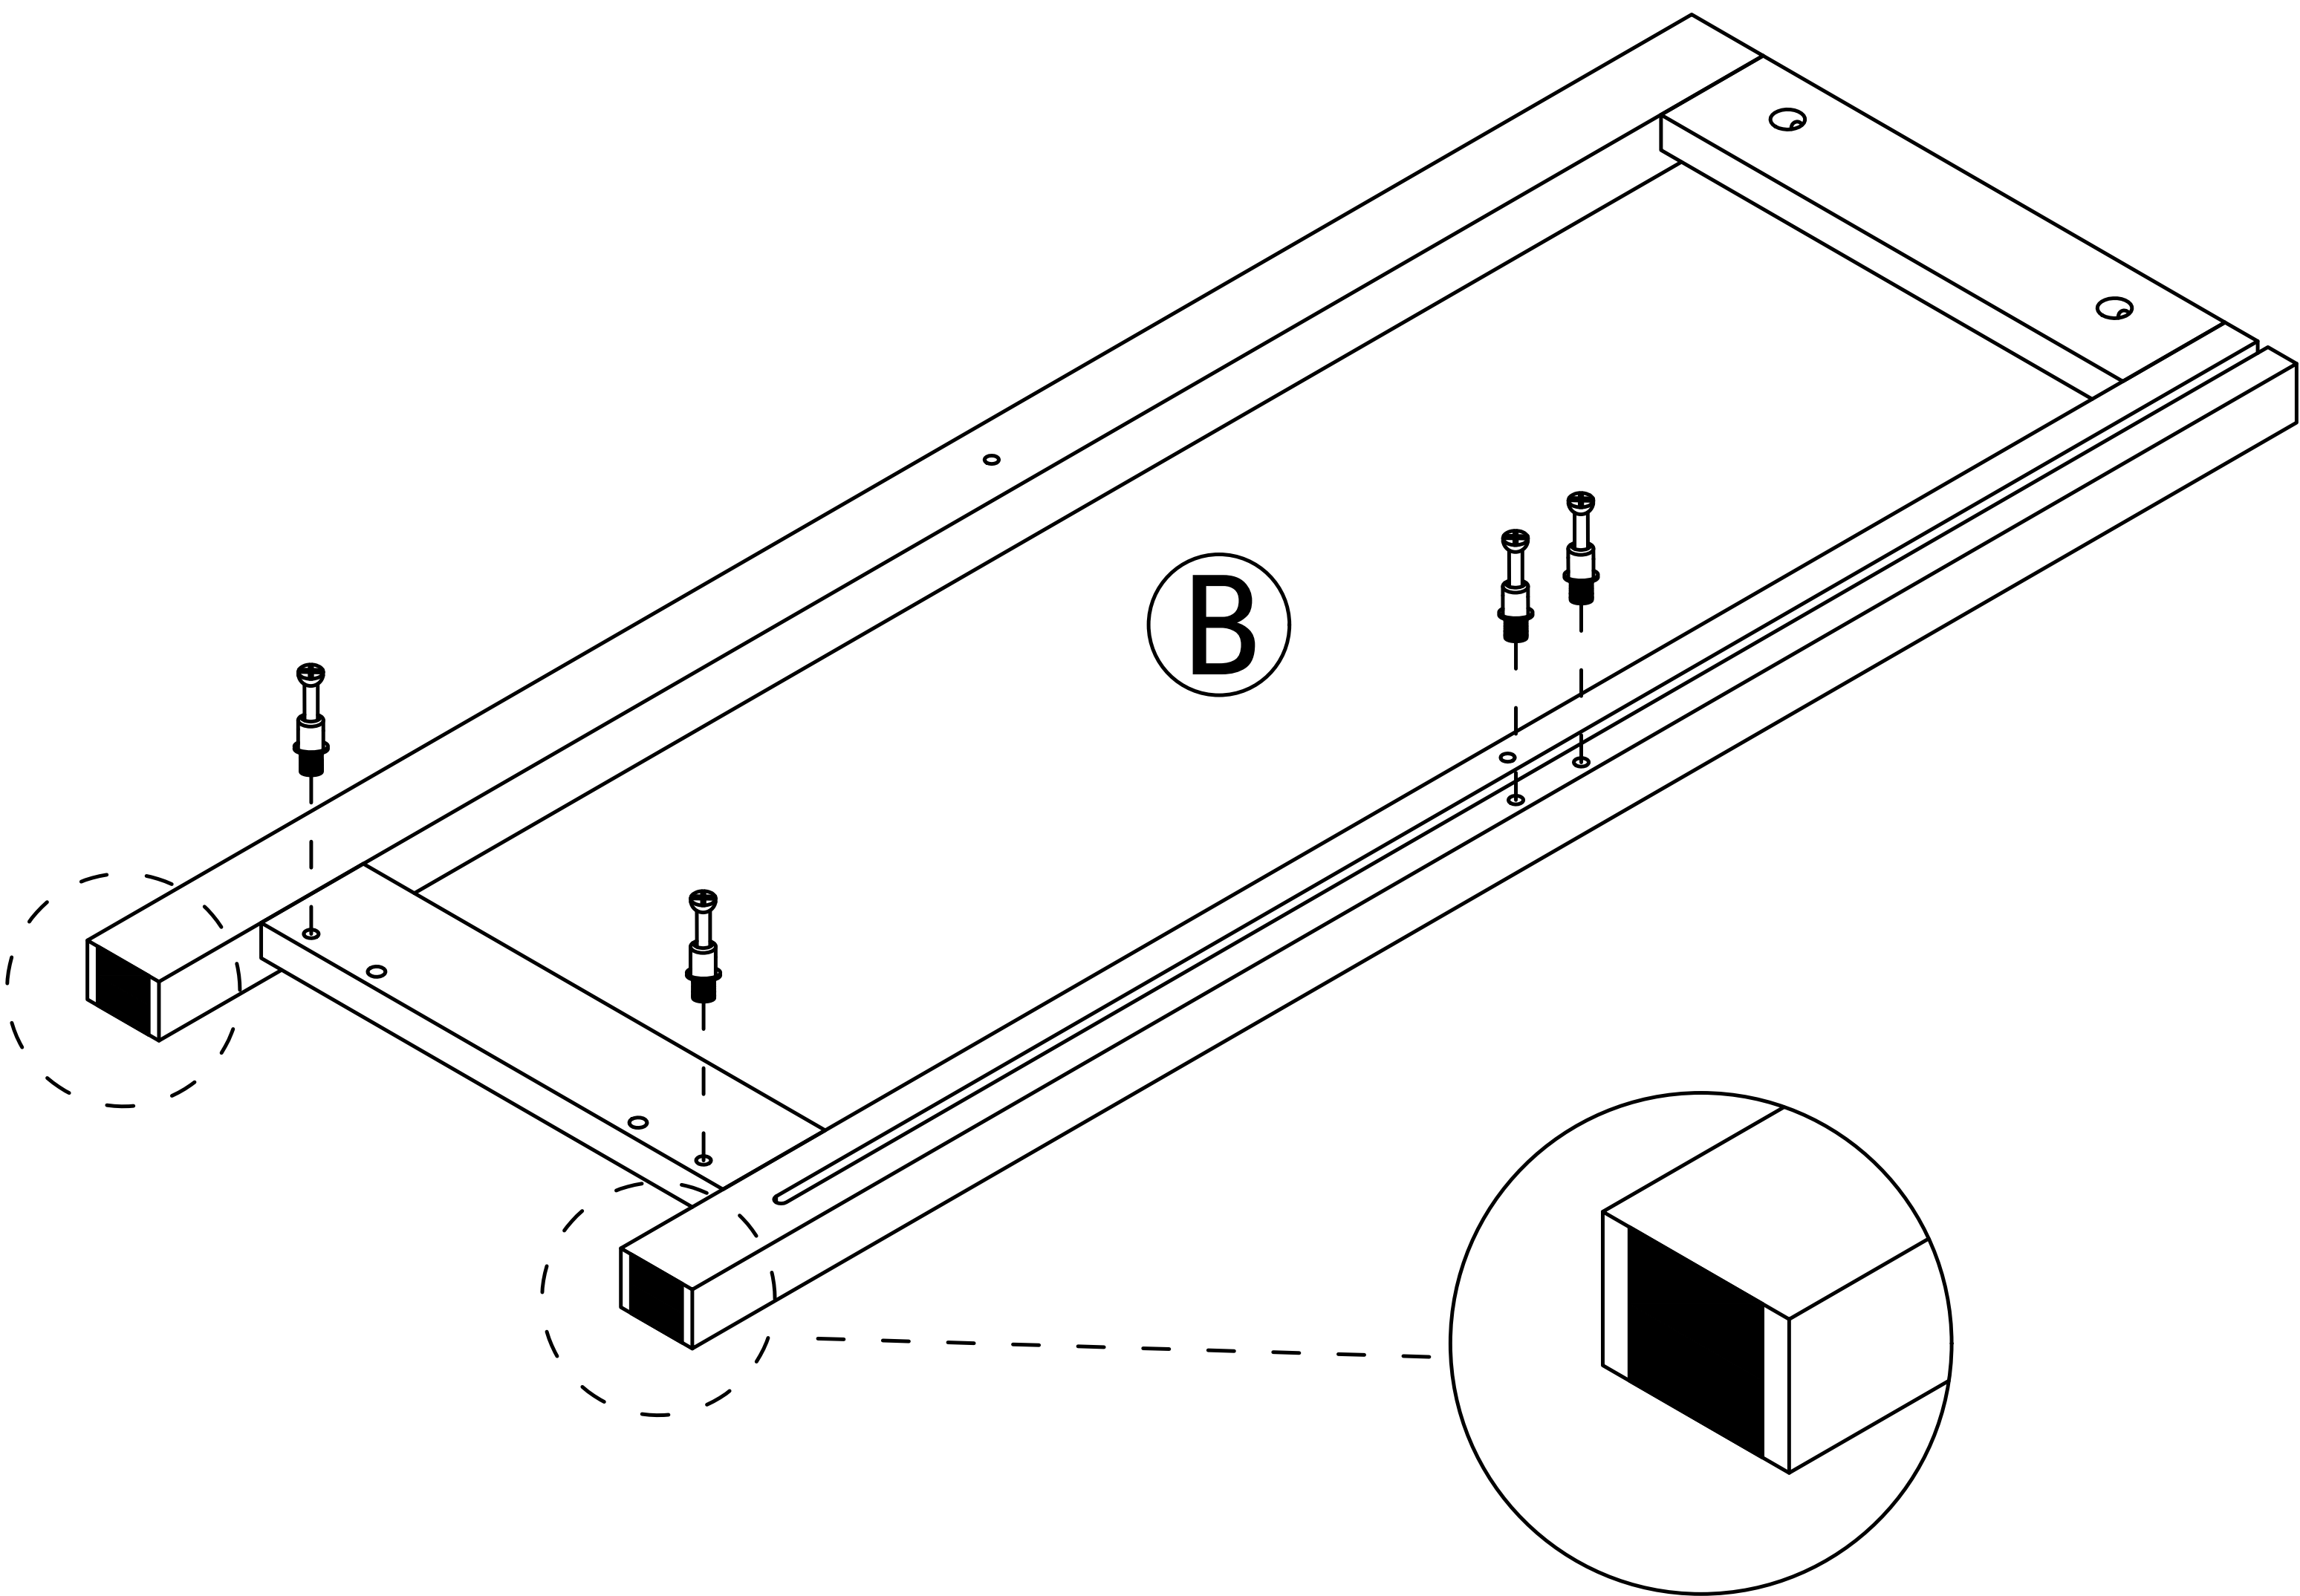


①

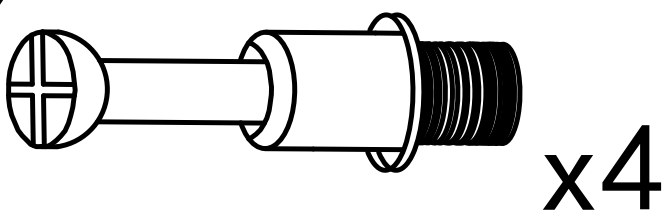

x4

④


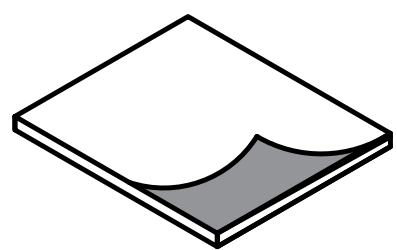


x2


Tear off release paper and stick the black foot pad on the board

4



Step 2

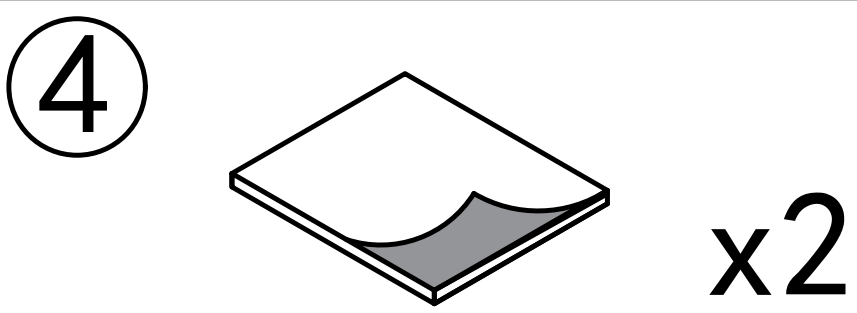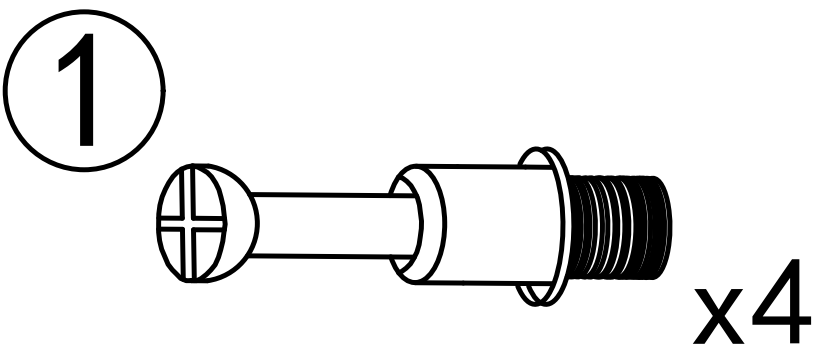

Tear off release paper and stick the black foot pad on the board

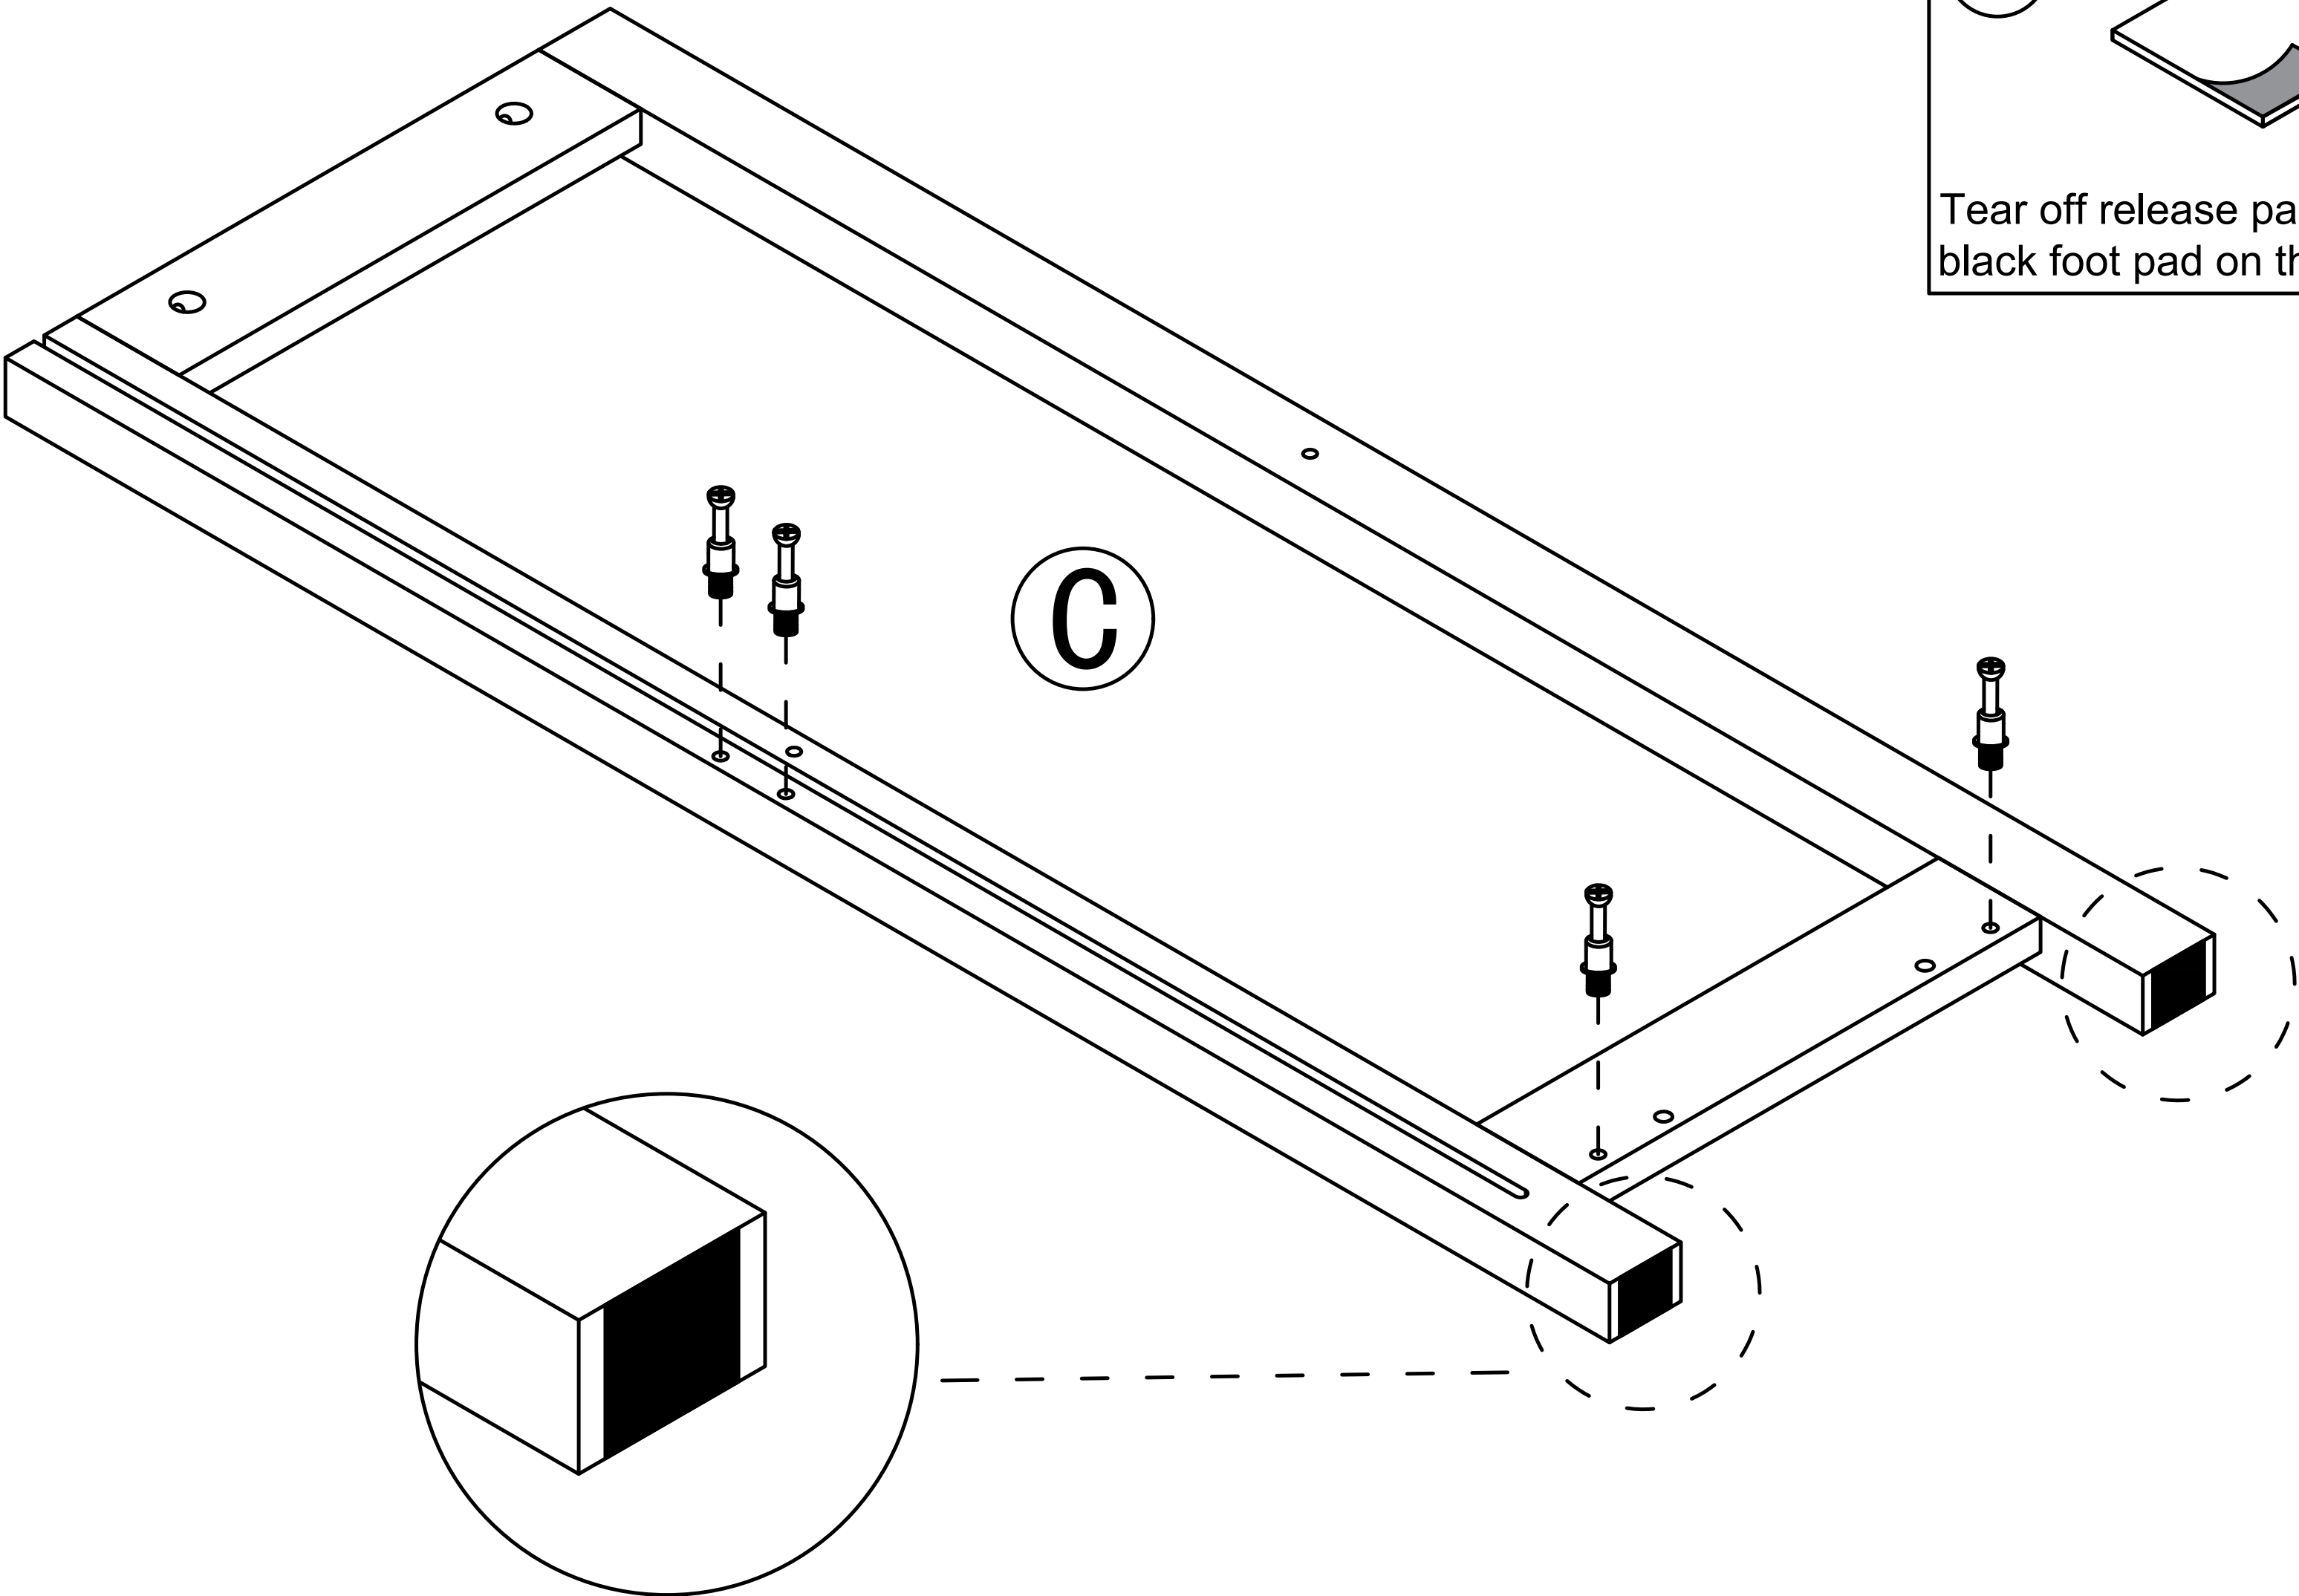


Step 3

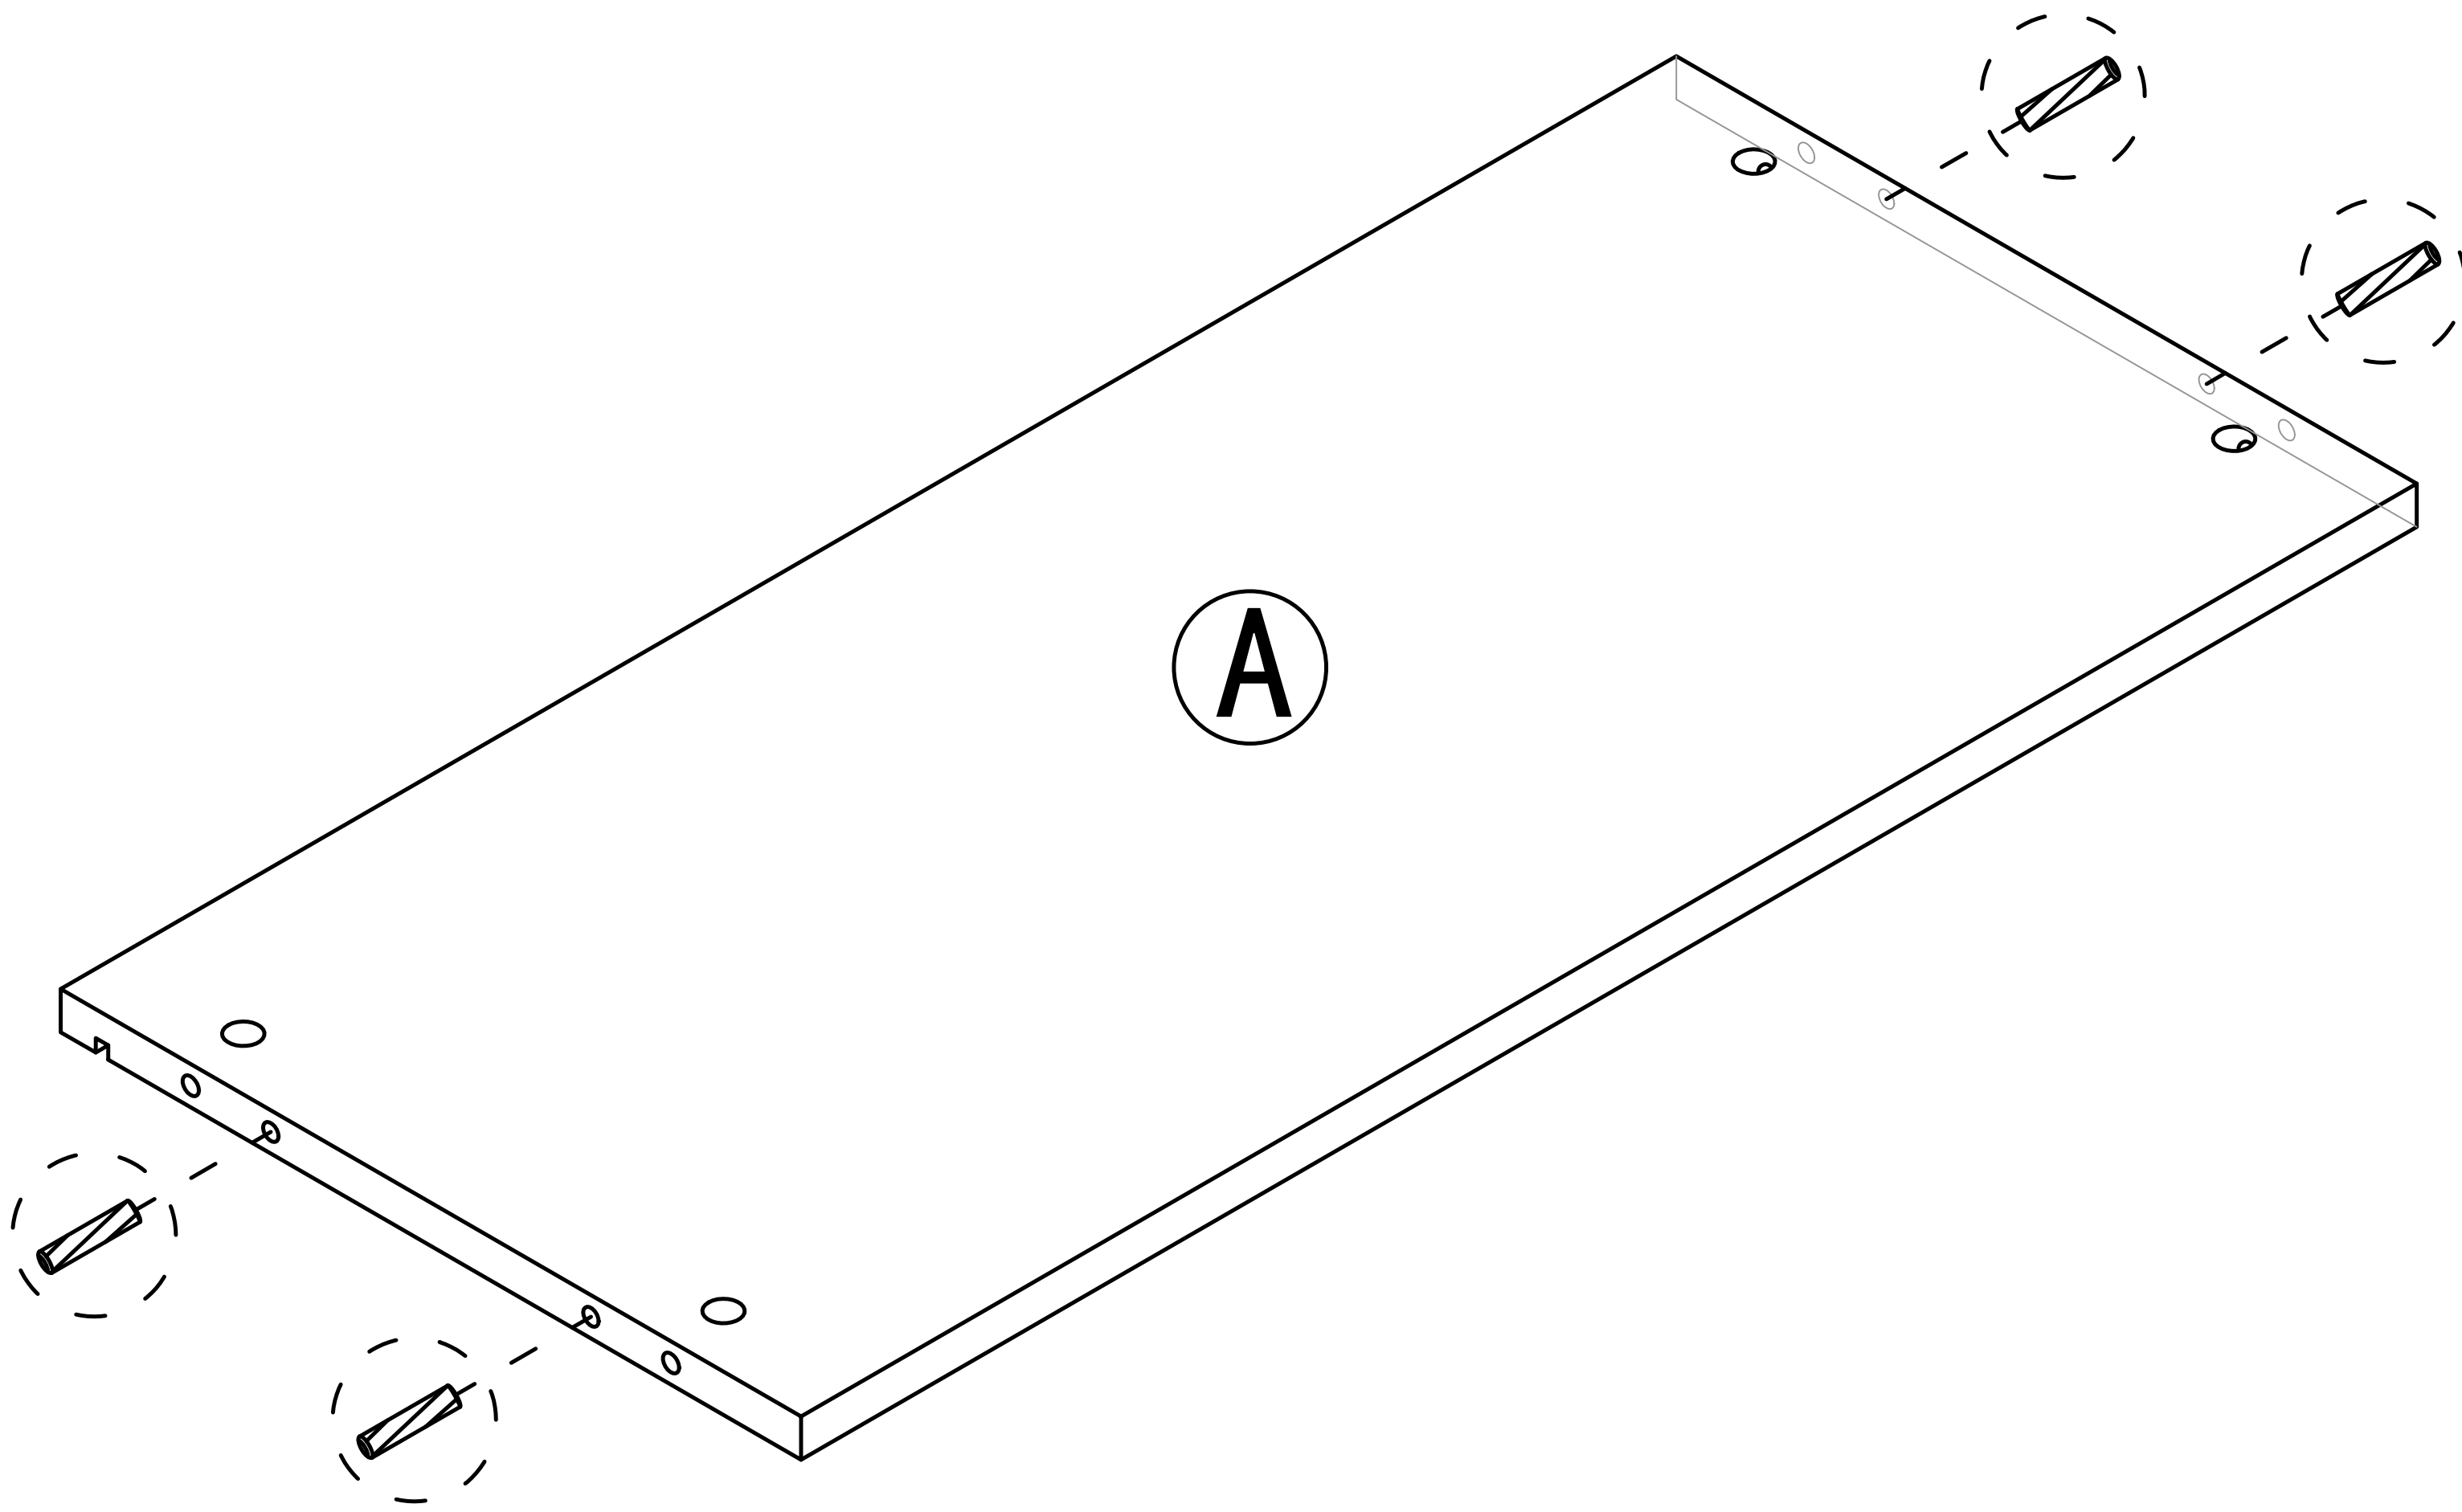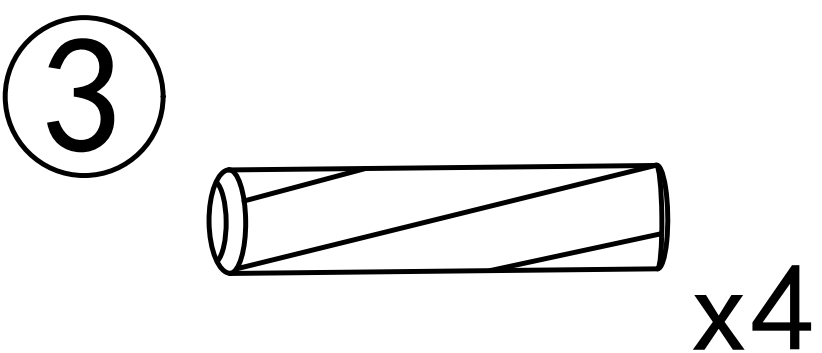


Step 4

2




x2

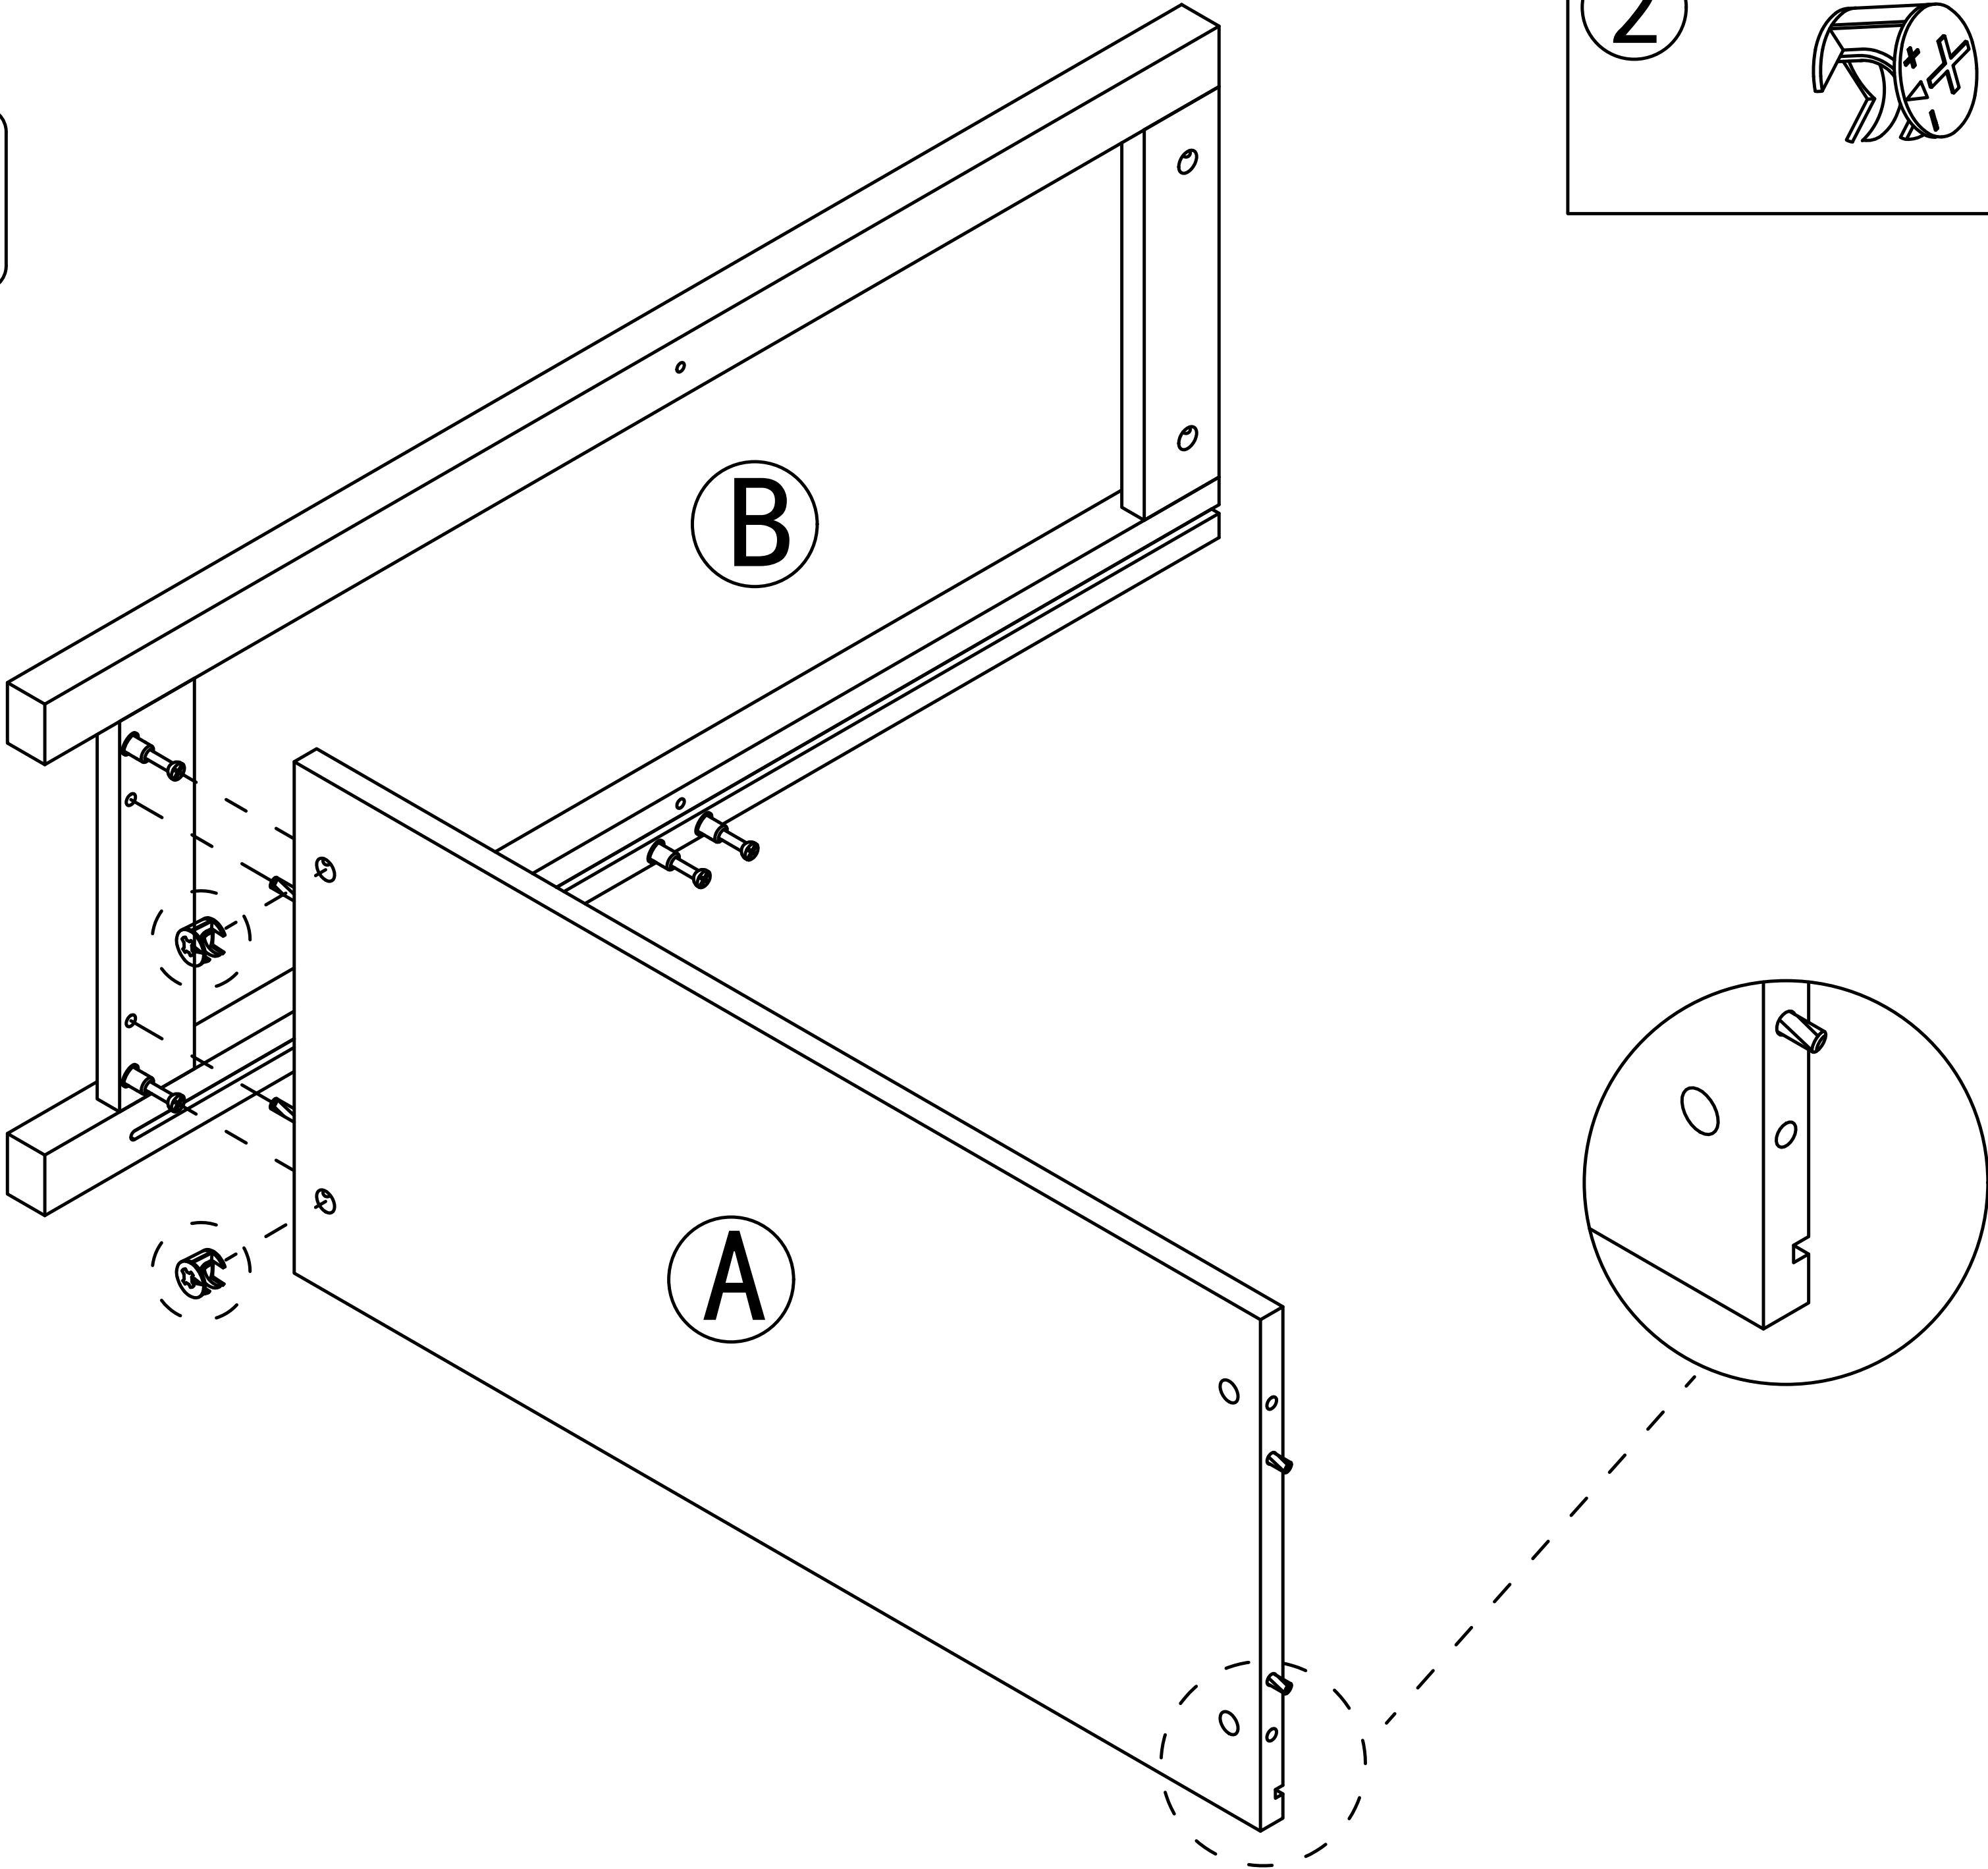


Step 5

2





x2

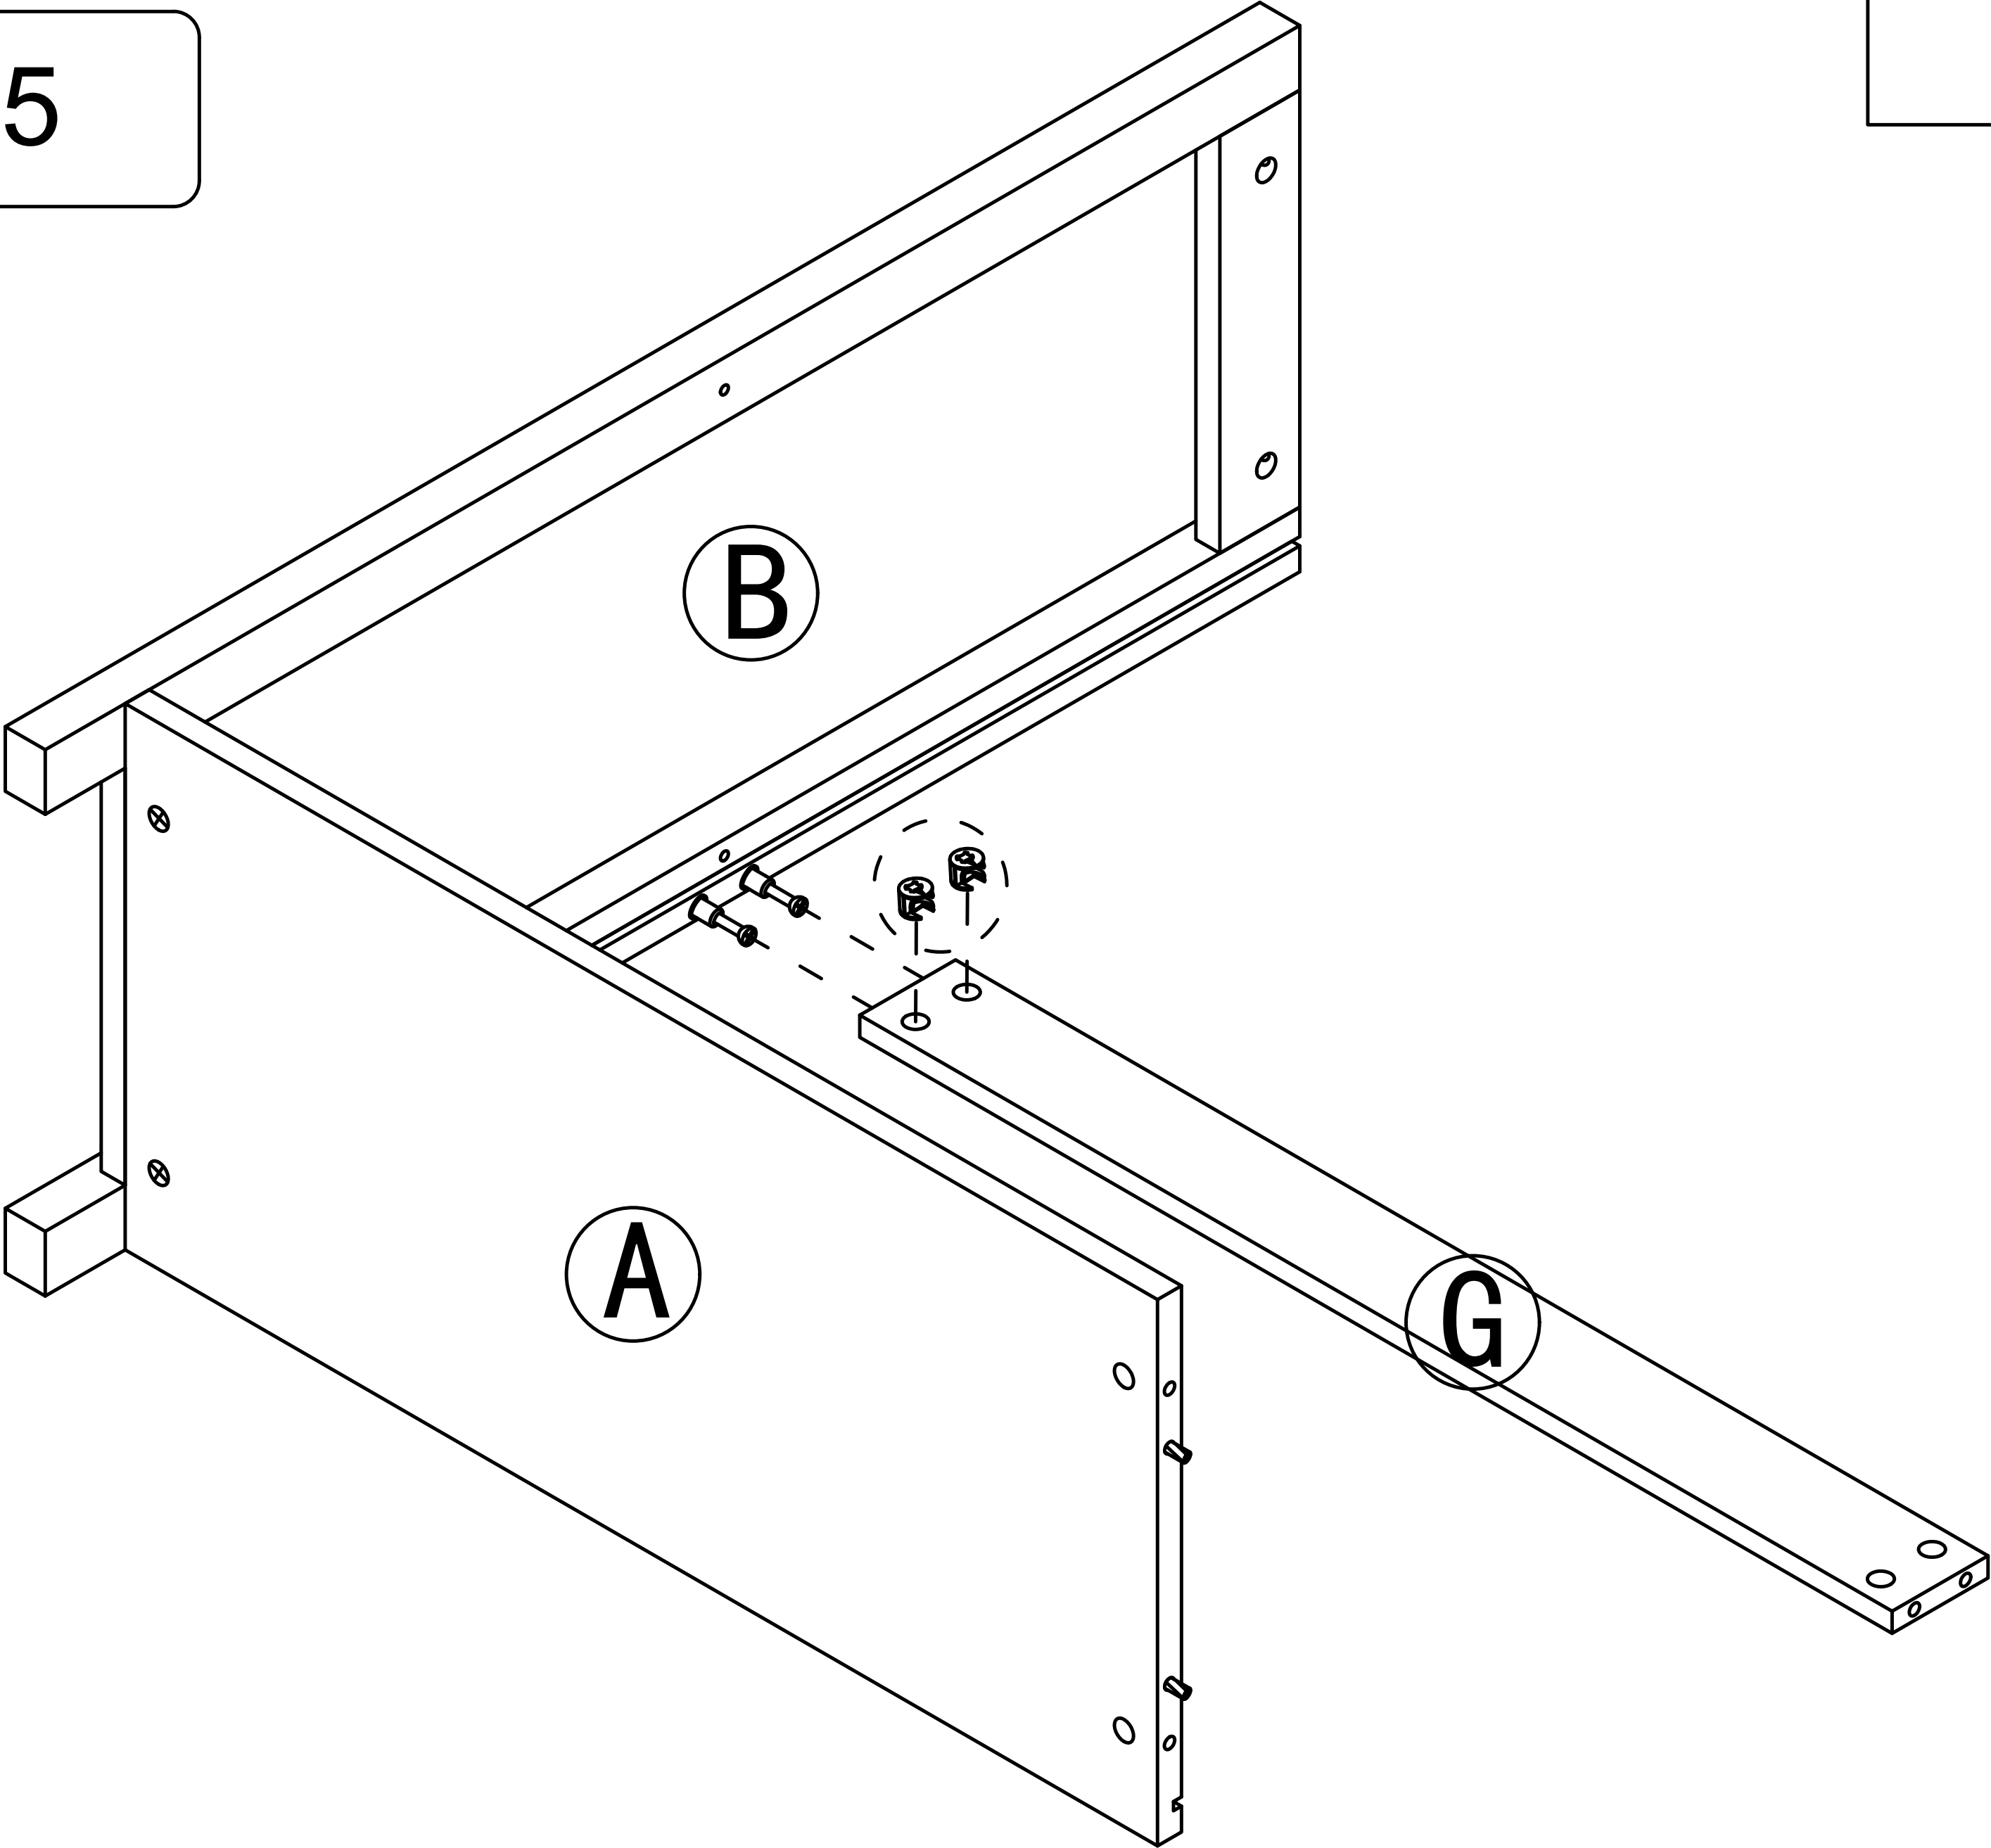

Step 6


2


 x4

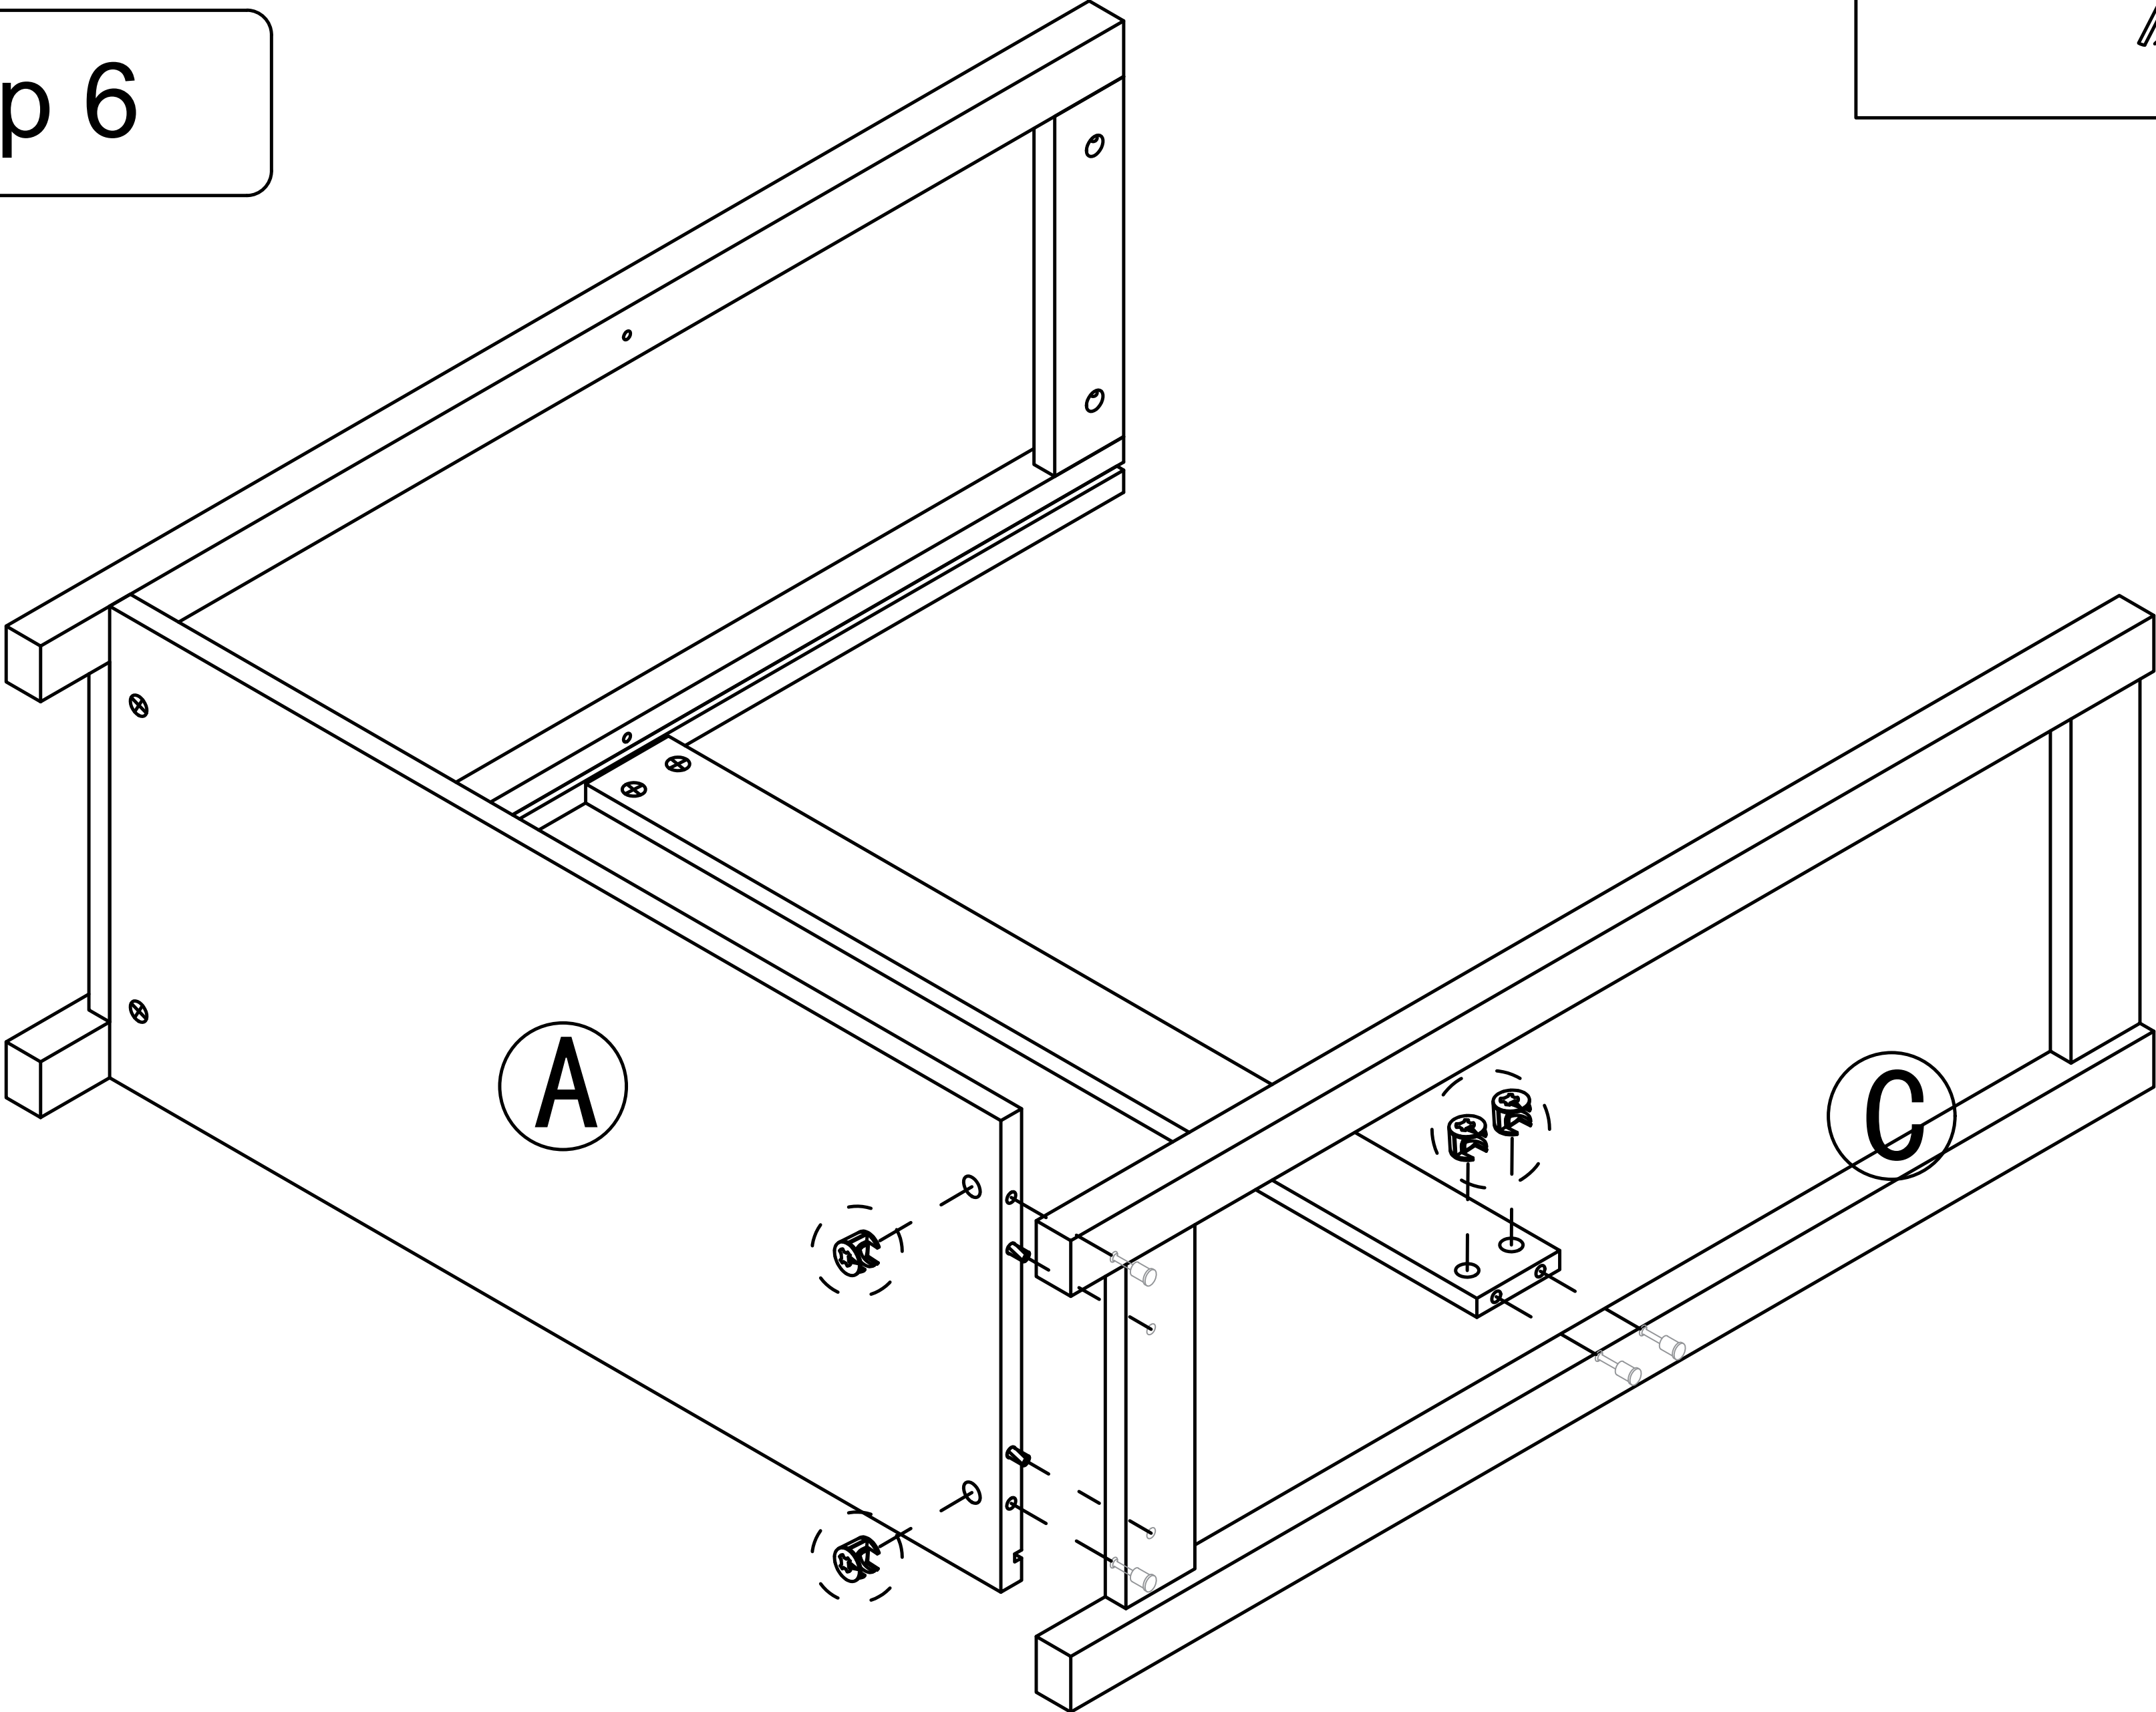


Step 7

1



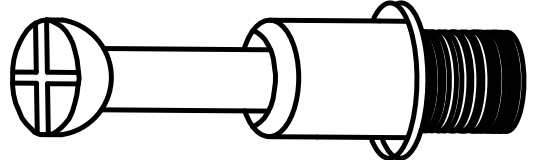
 x4

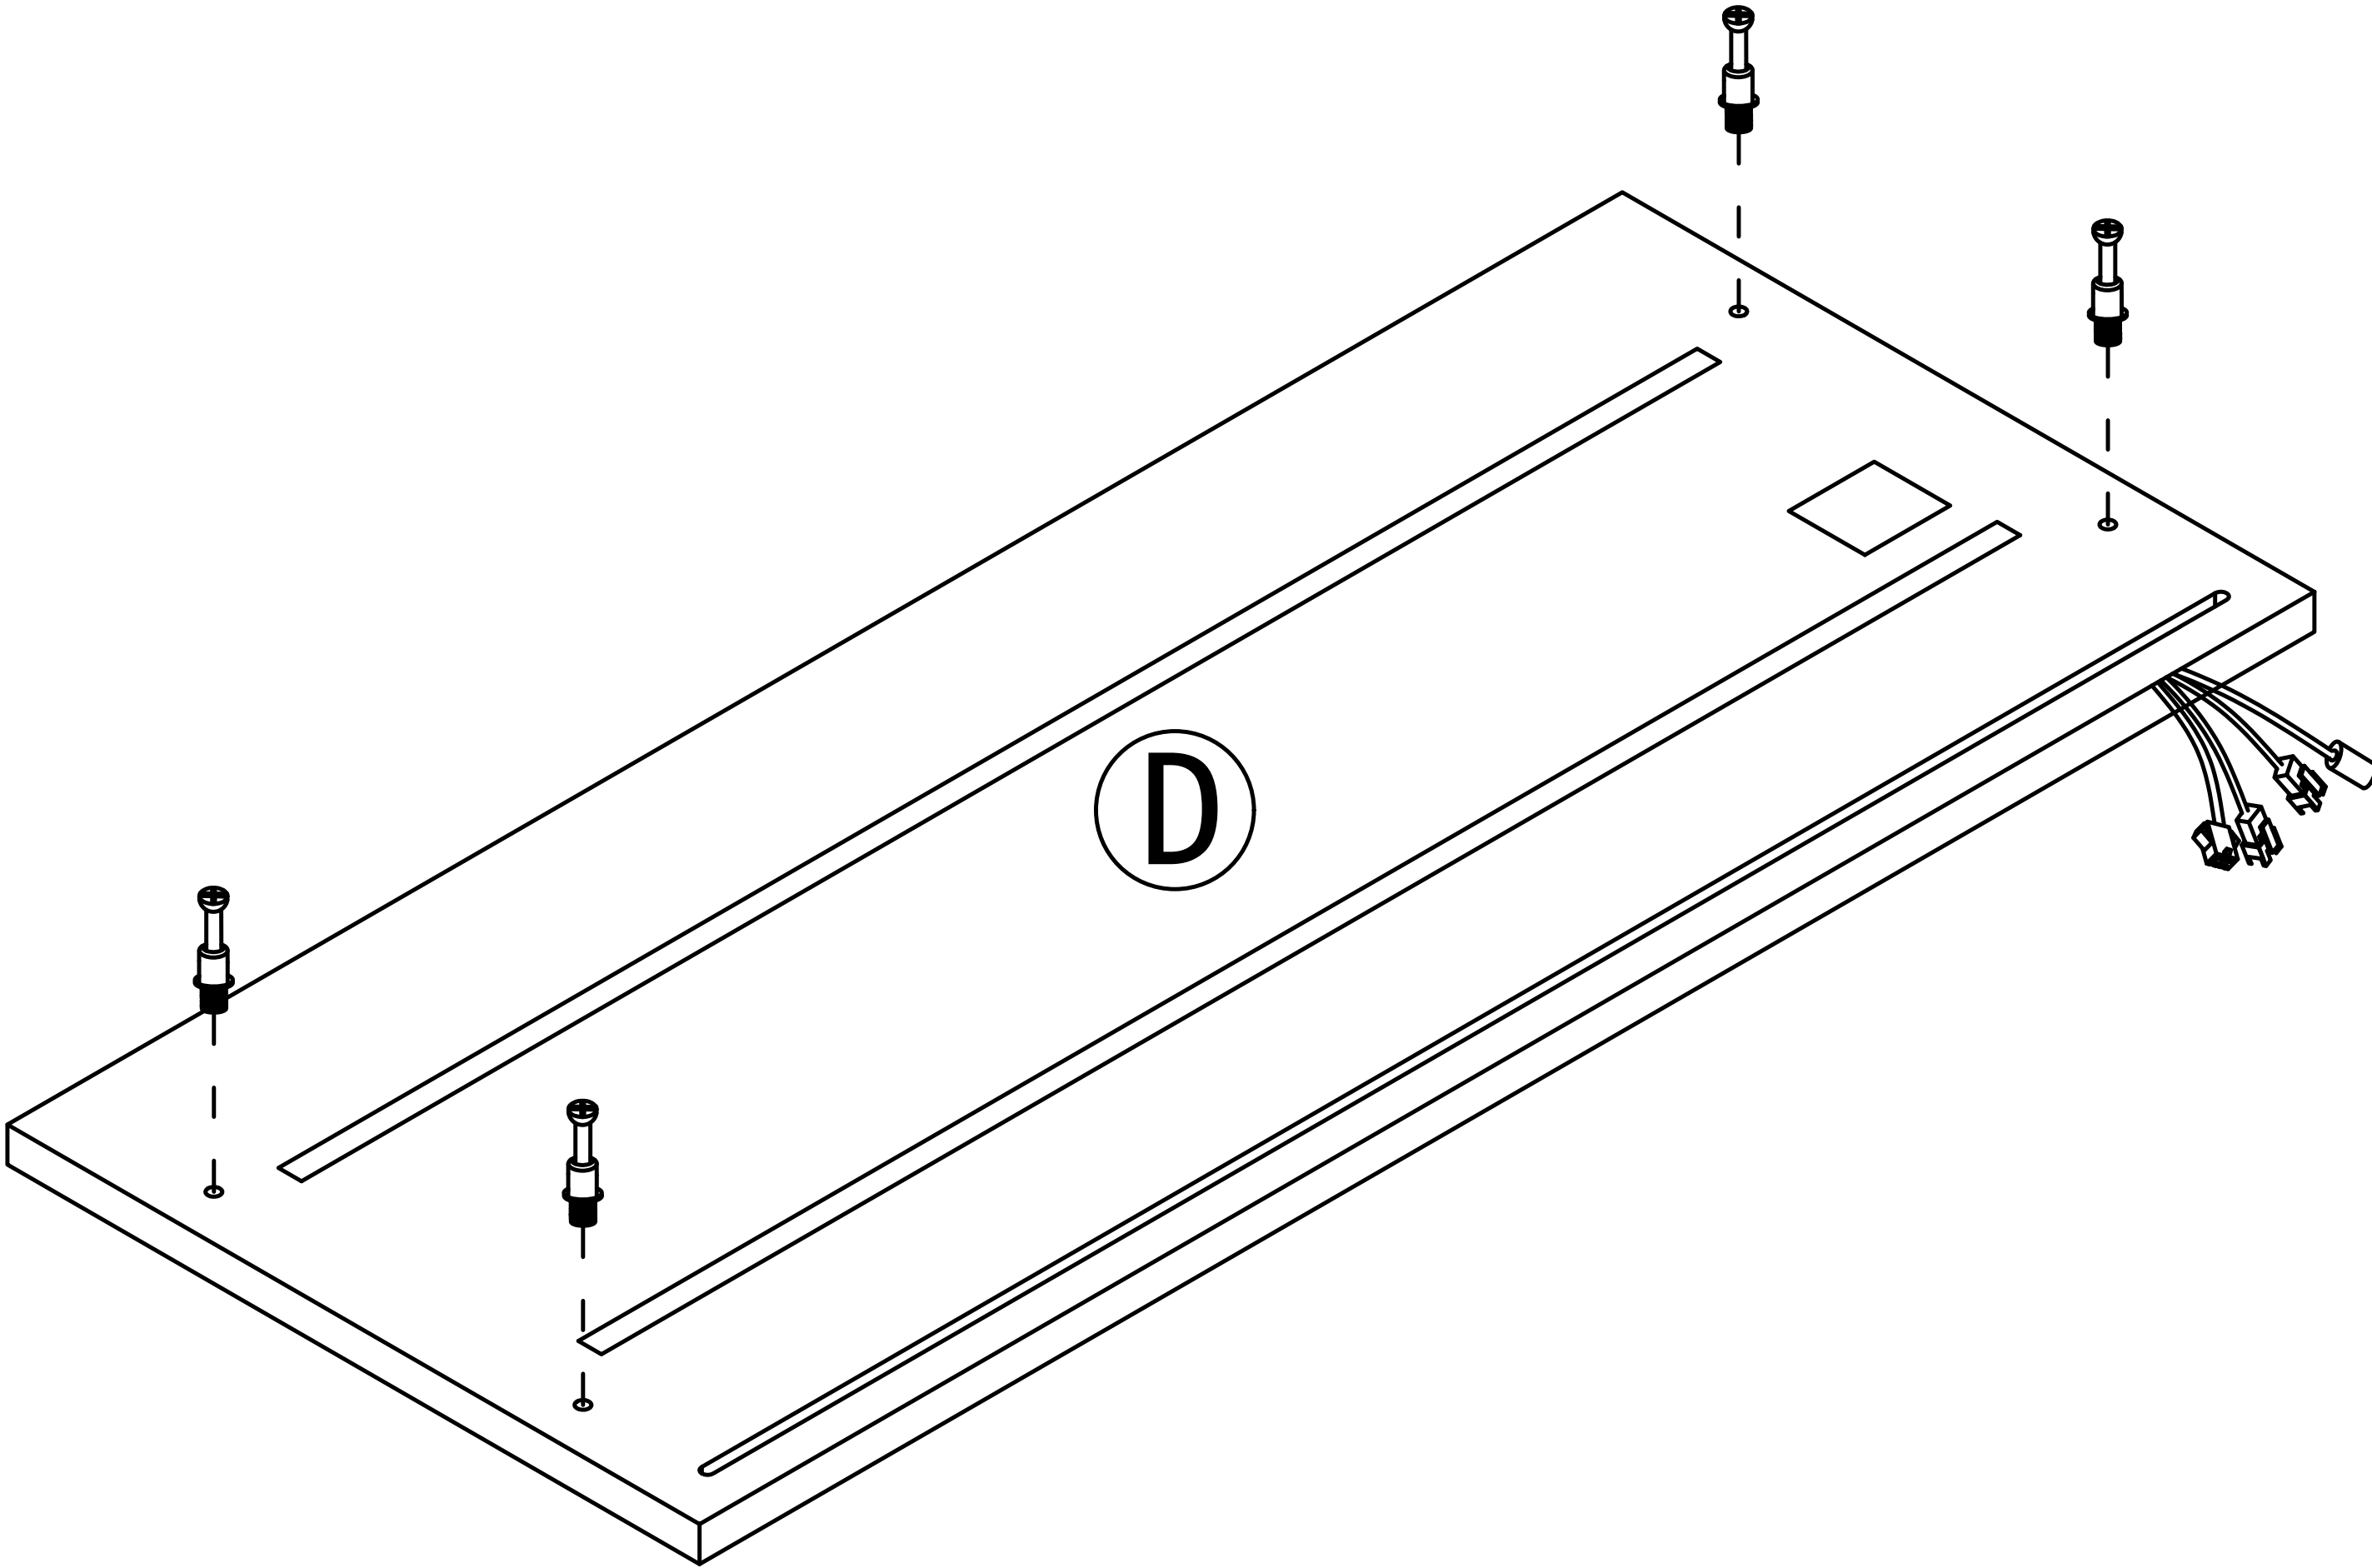

Step 8

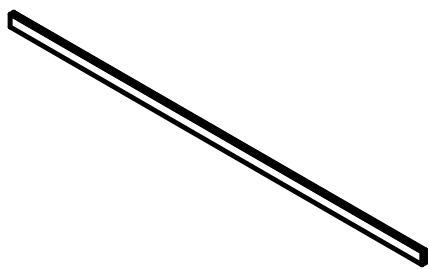
⑤  x2

Place the "H" board, Backboard card strip, and "H" board in order

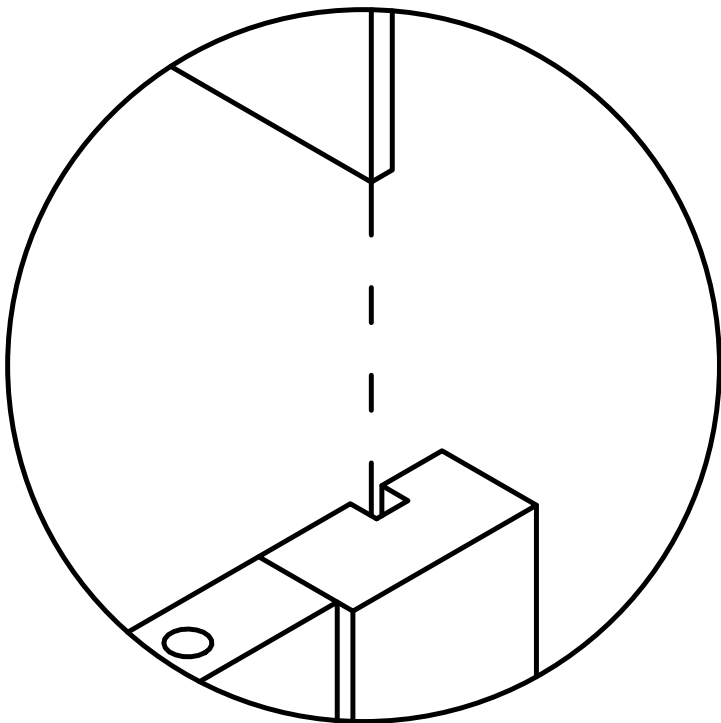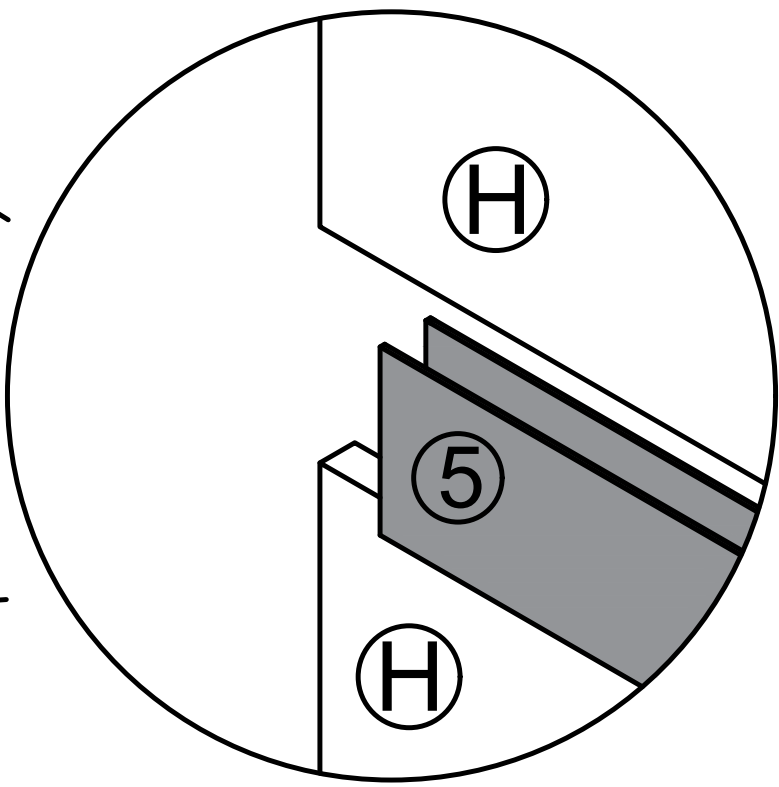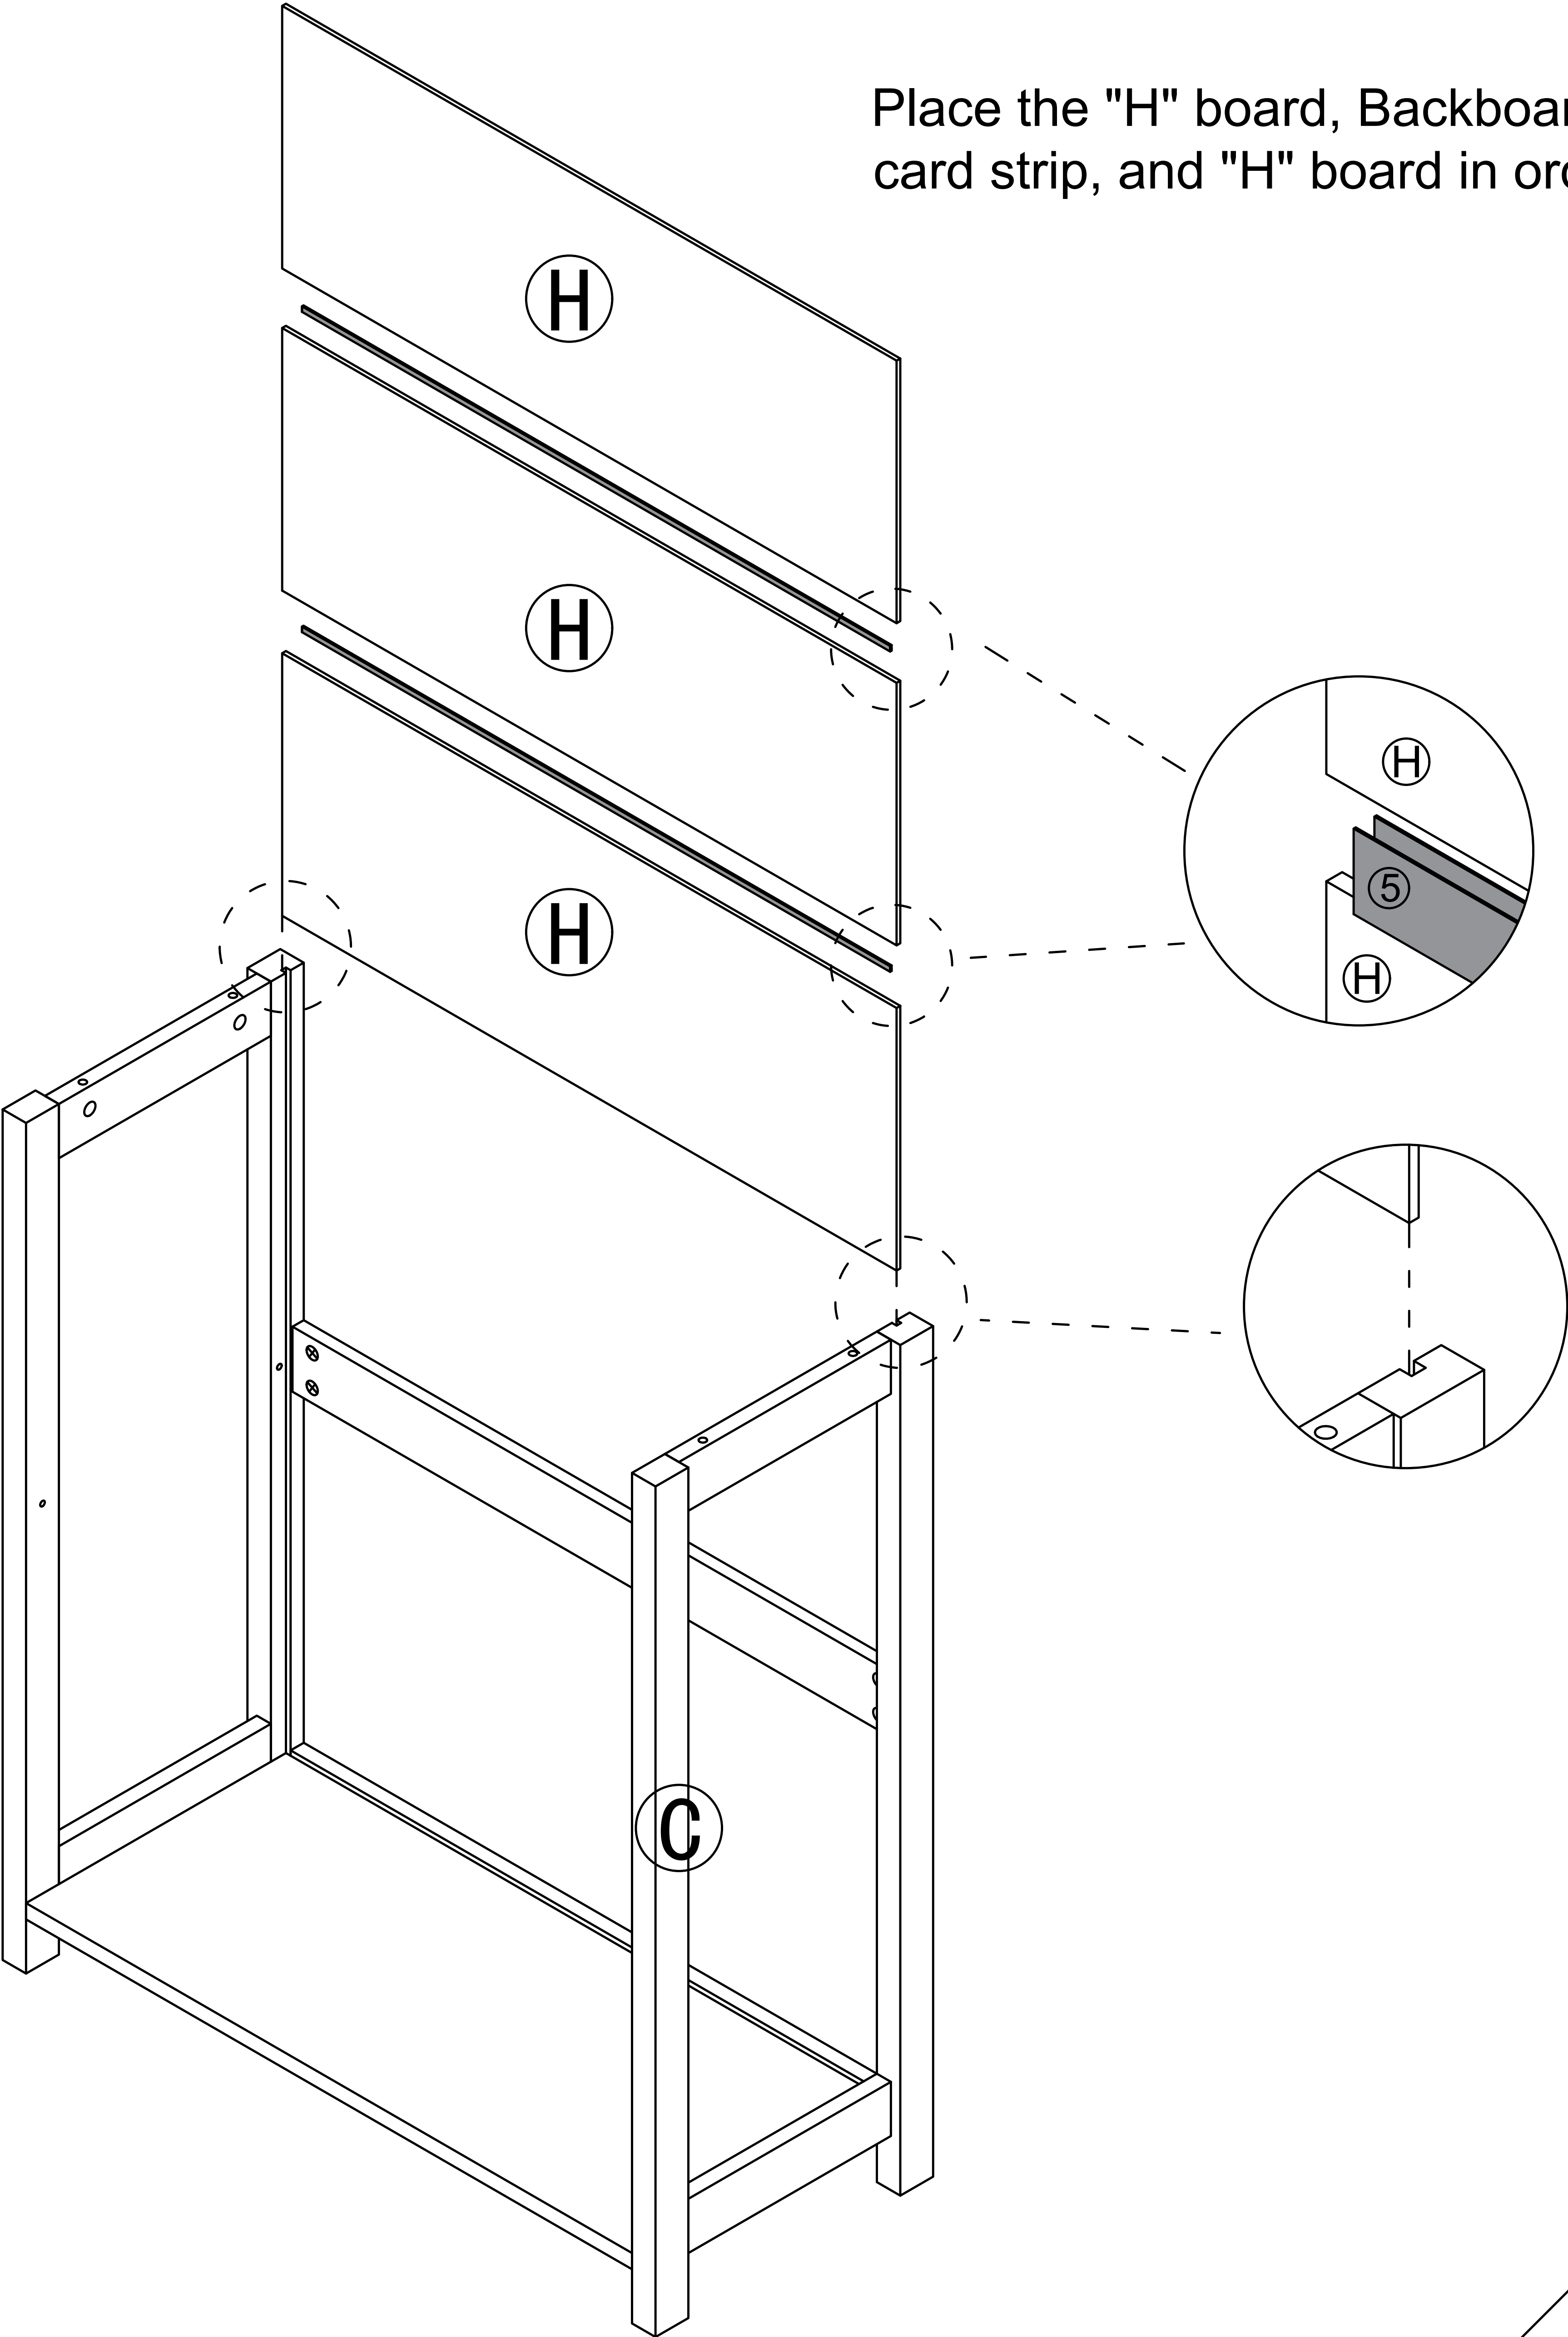


Step 9

2




x4

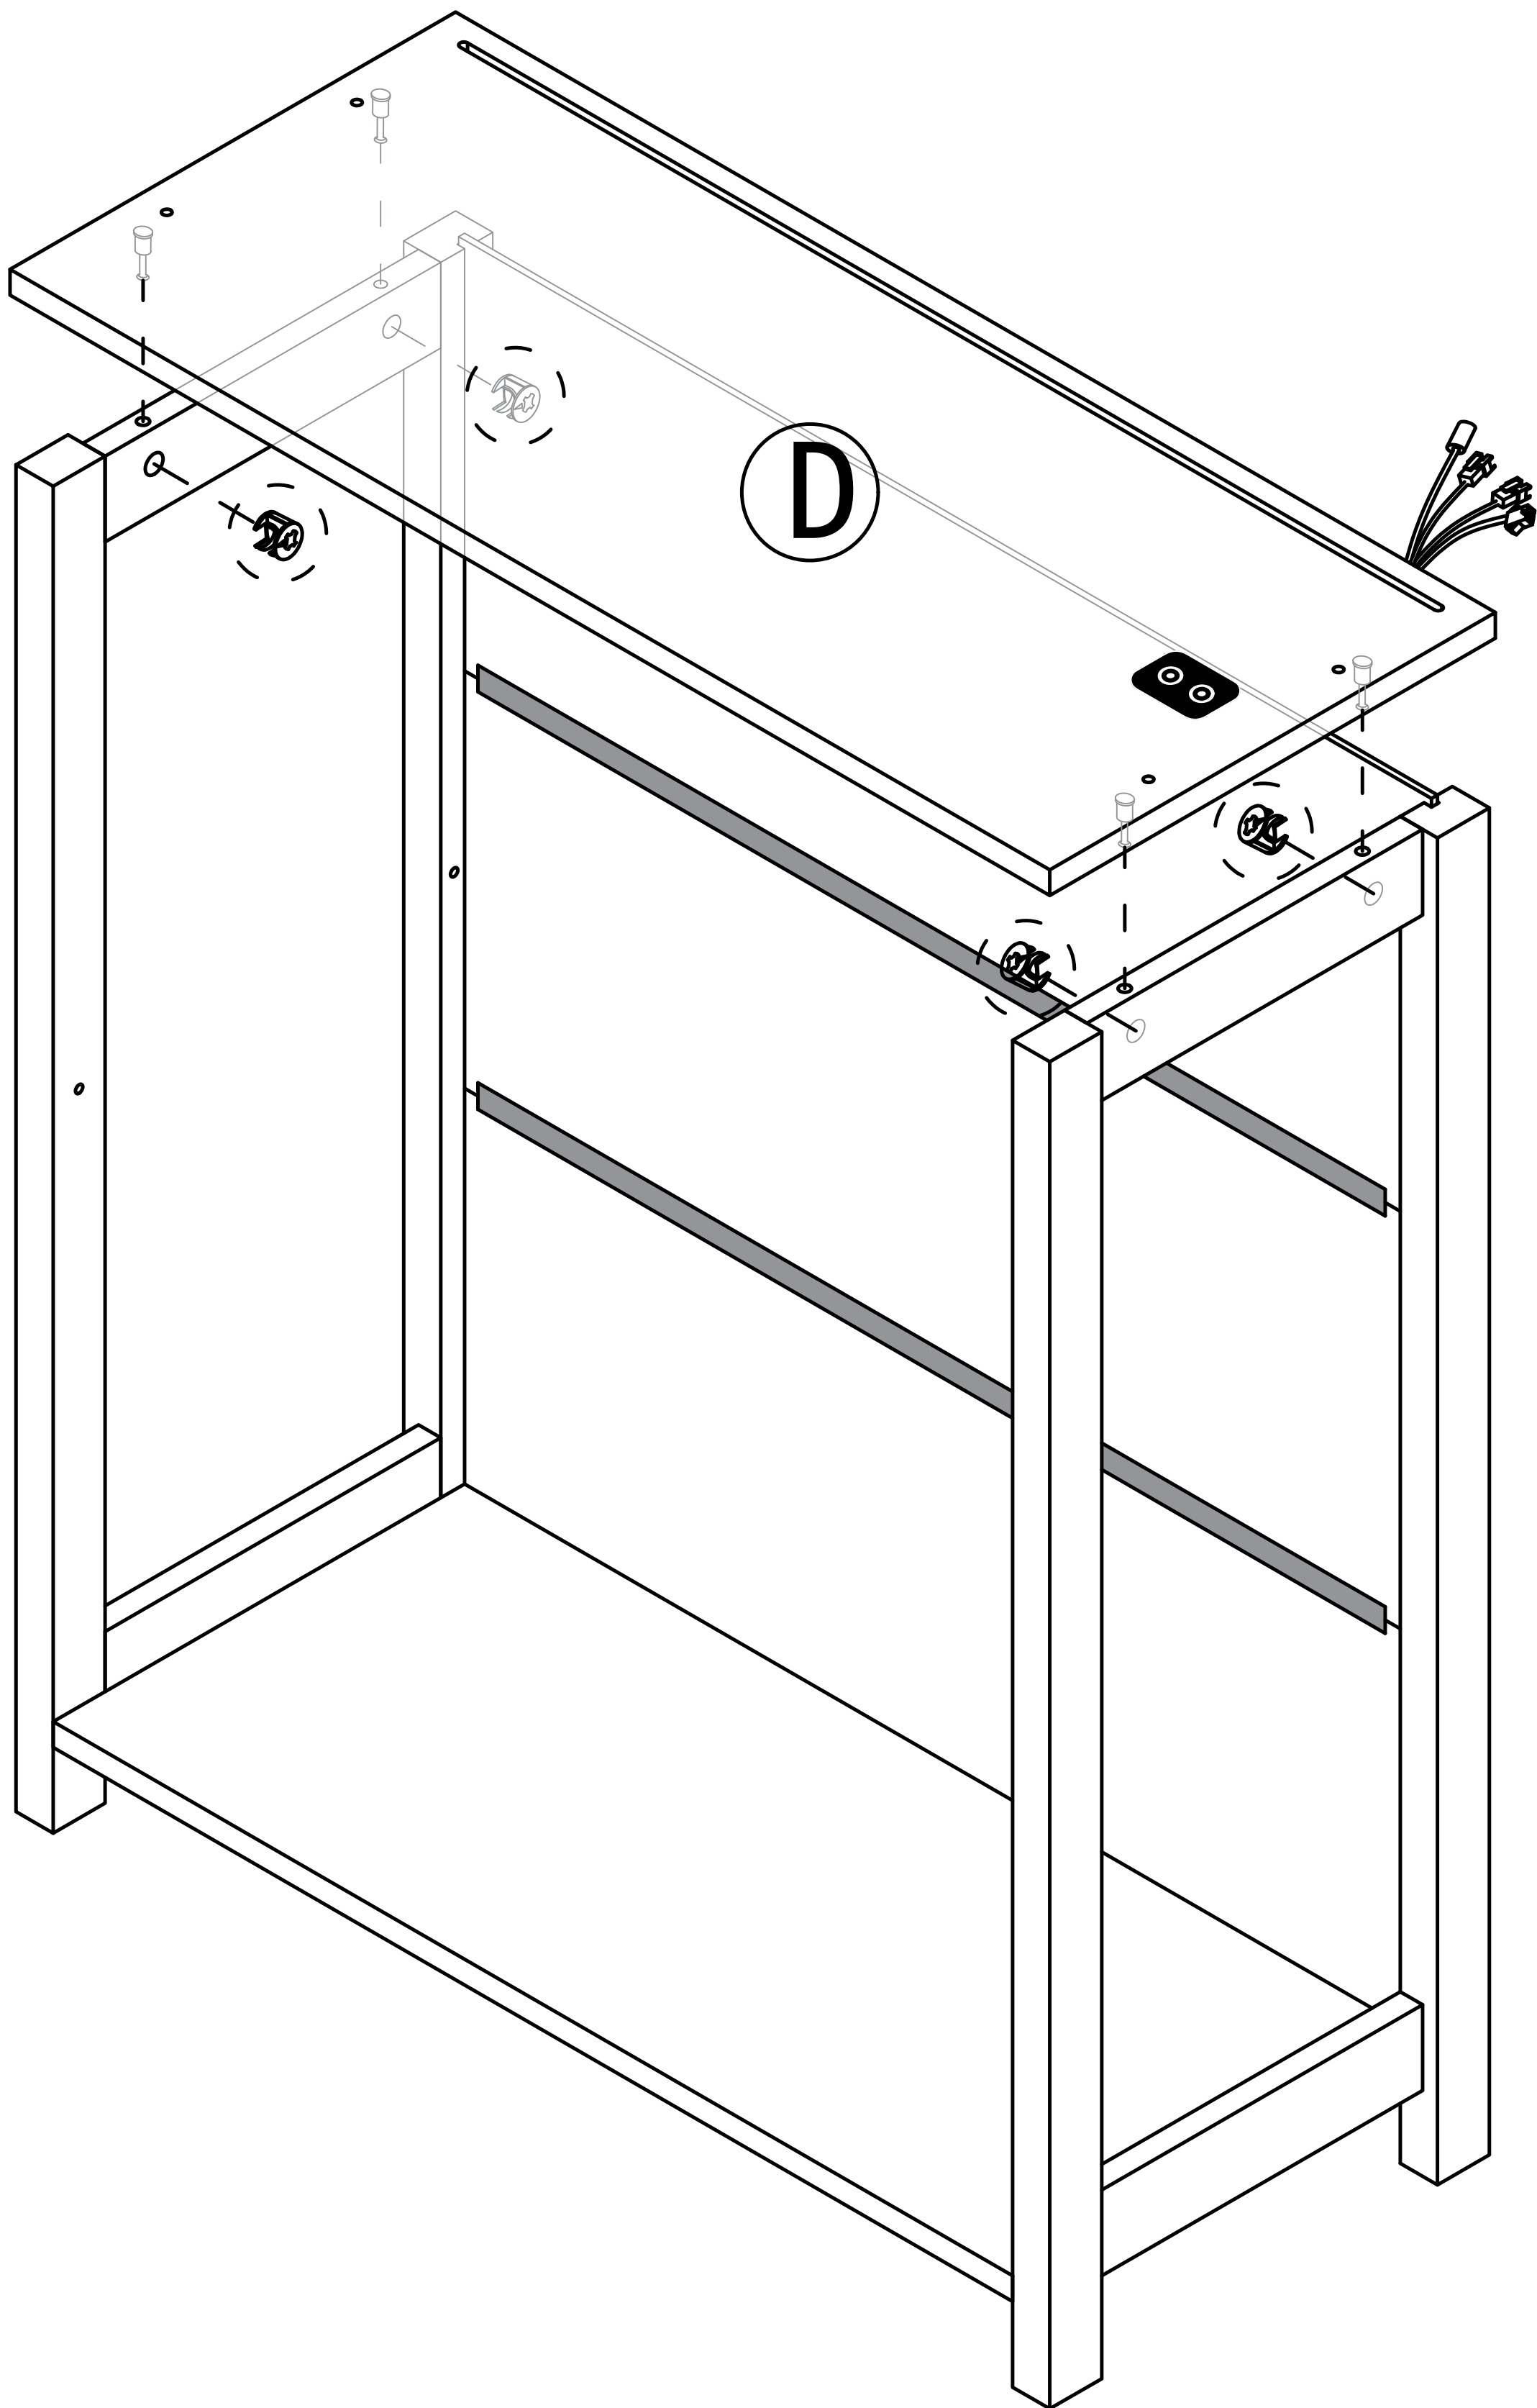


Step 10

1

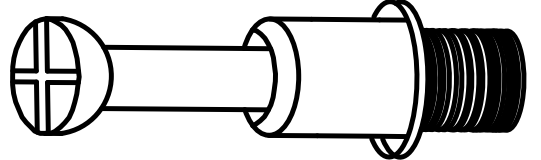


x4

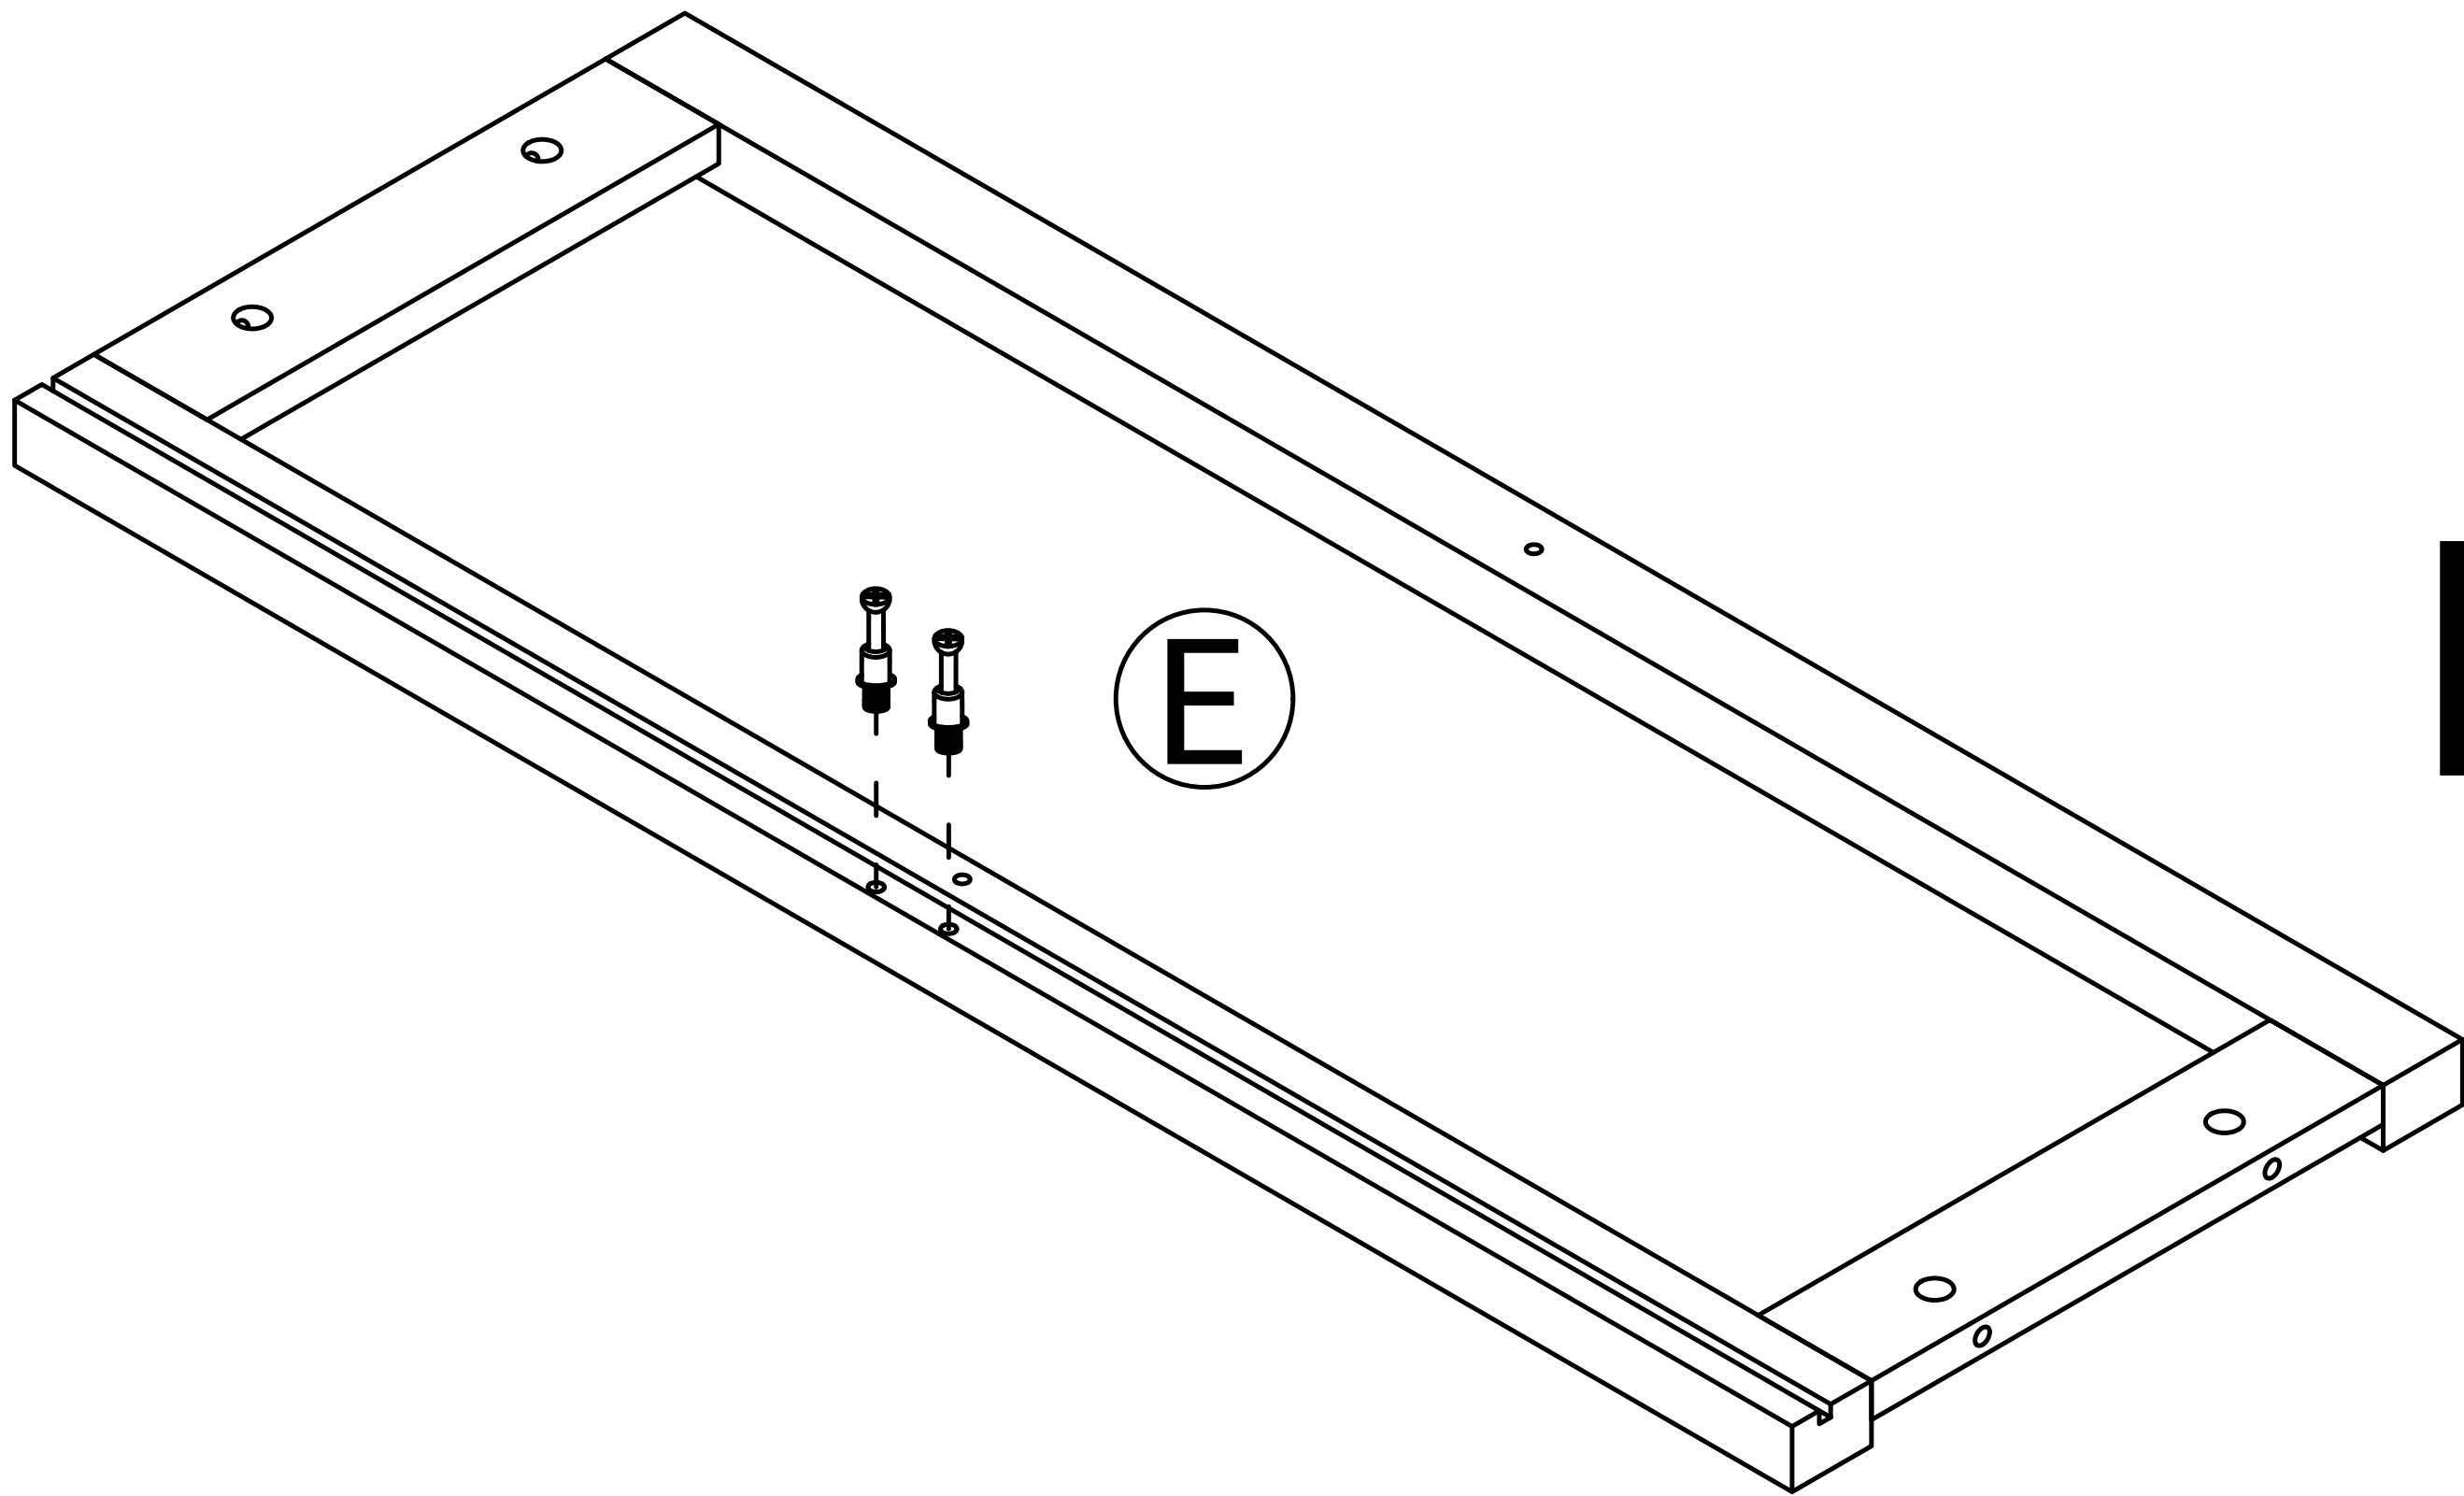


Ex2

Step 11

②




x2

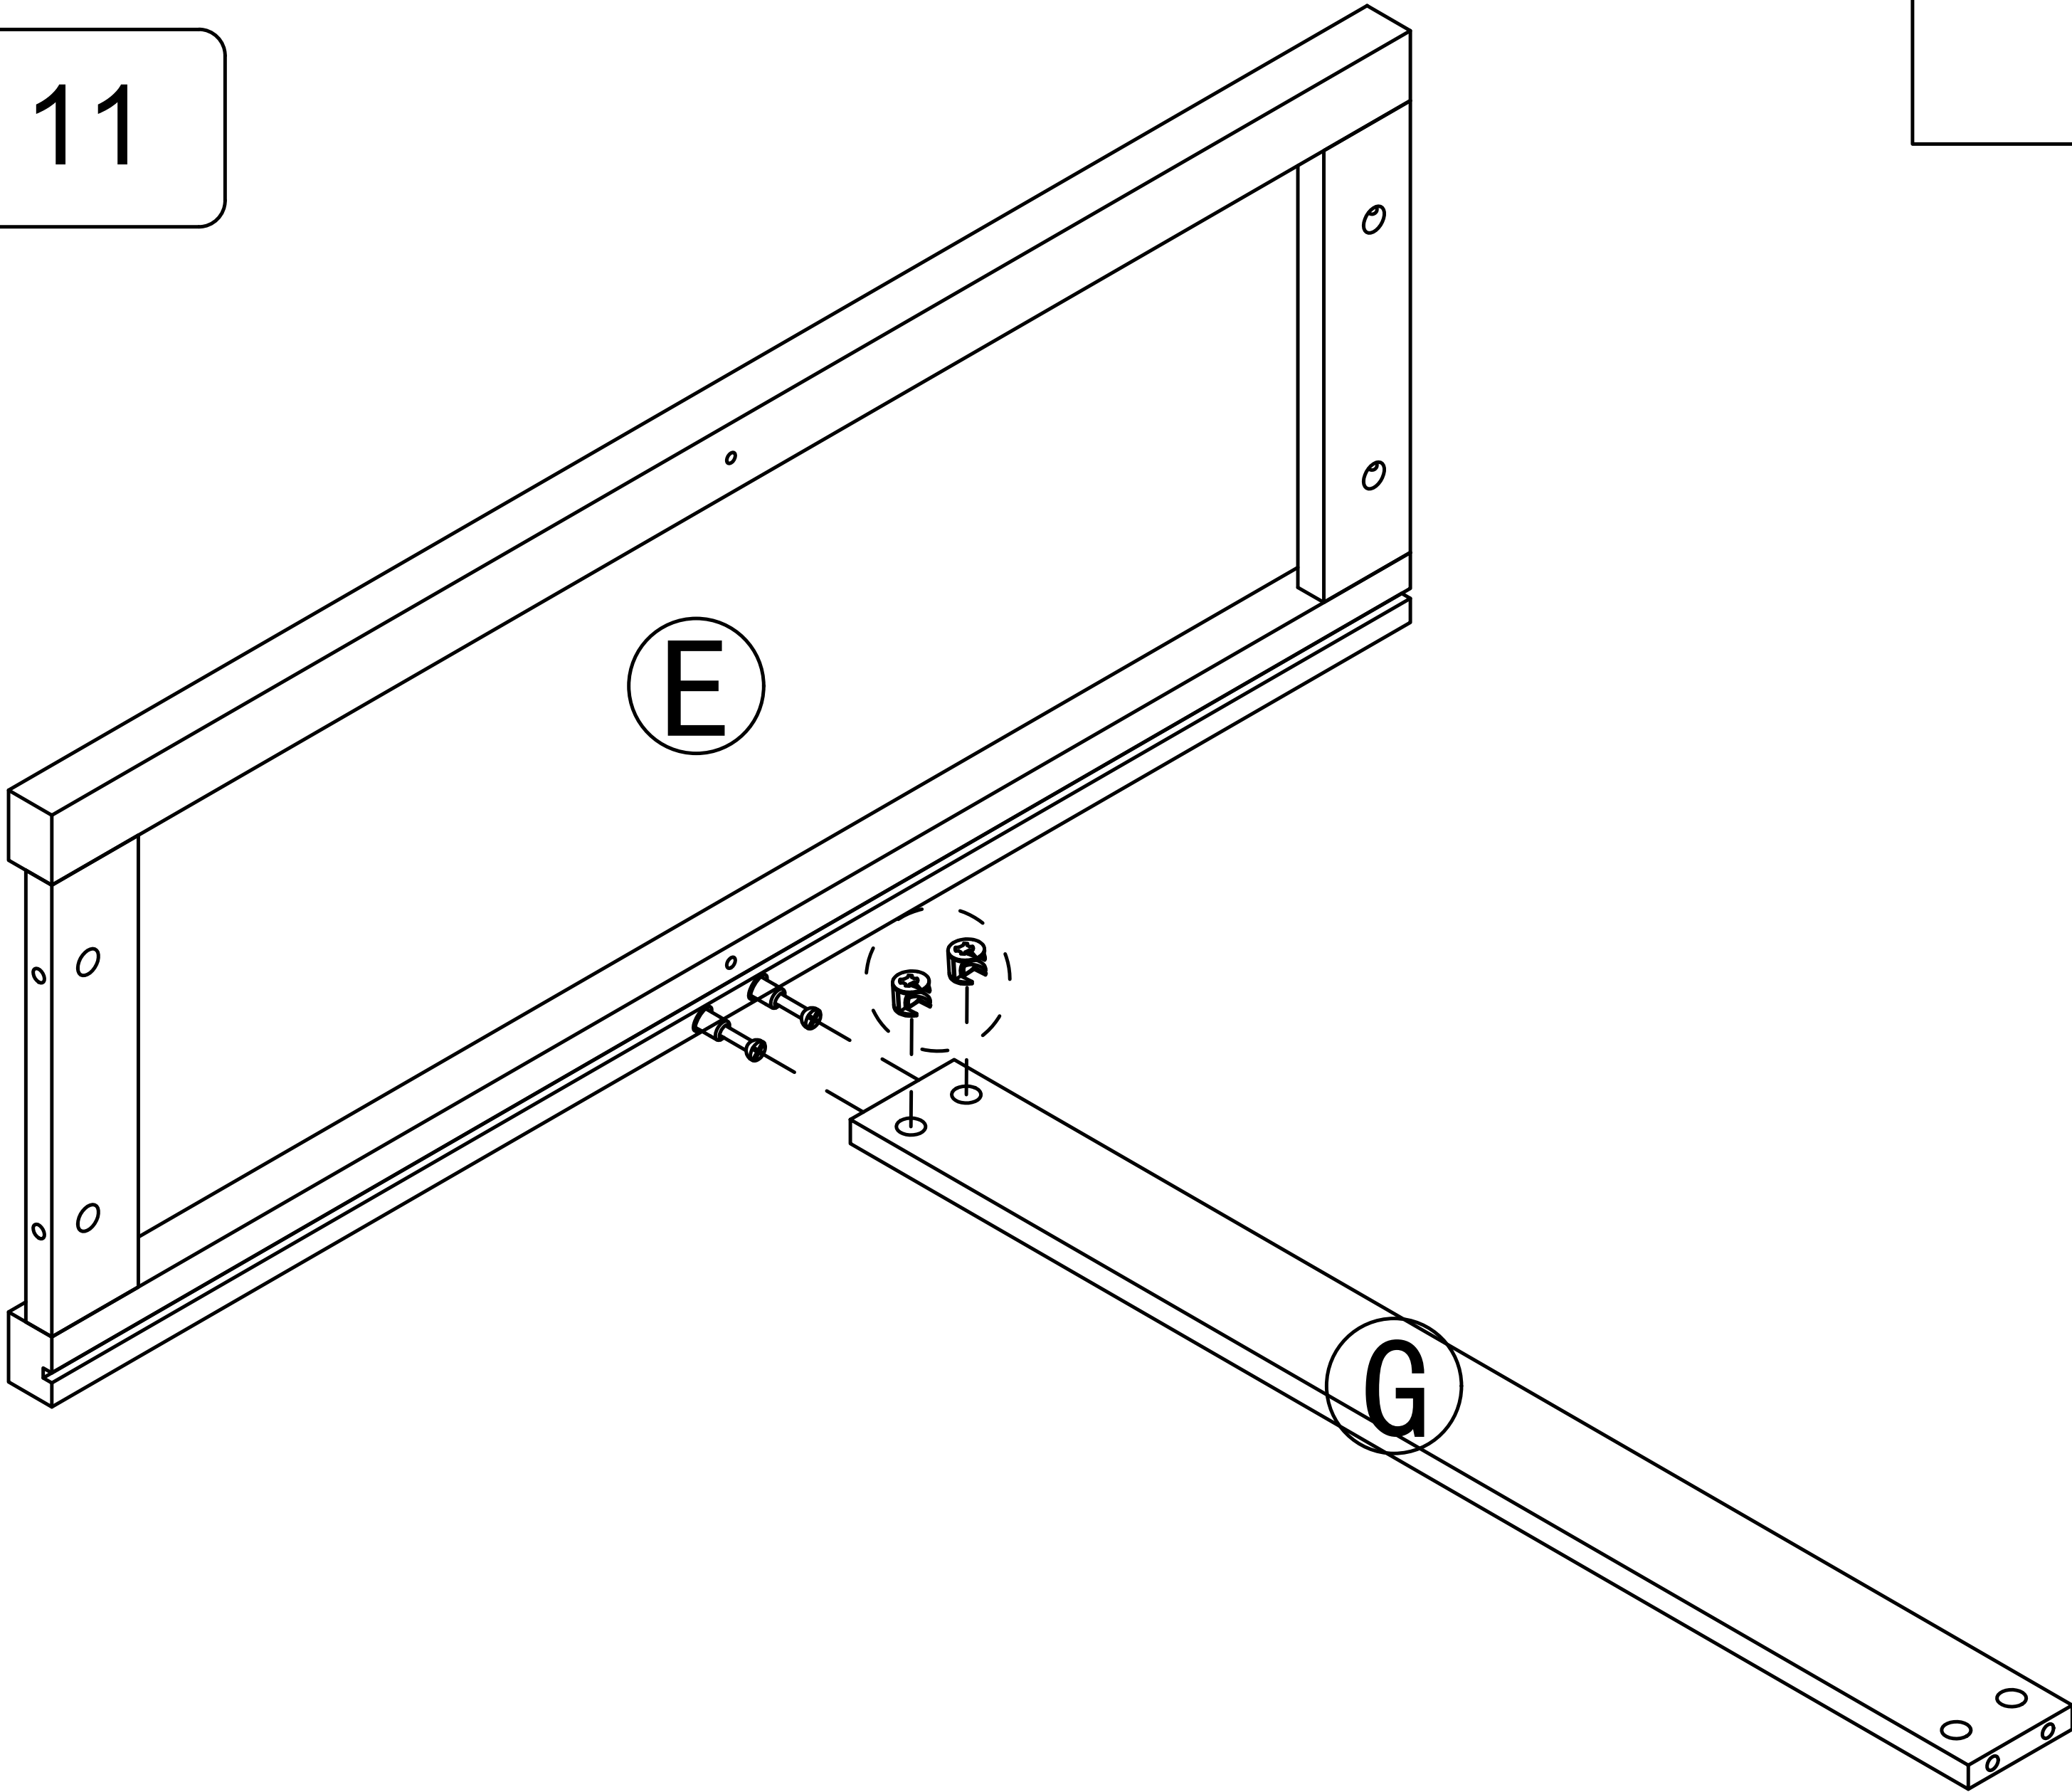


Step 12



②





x2

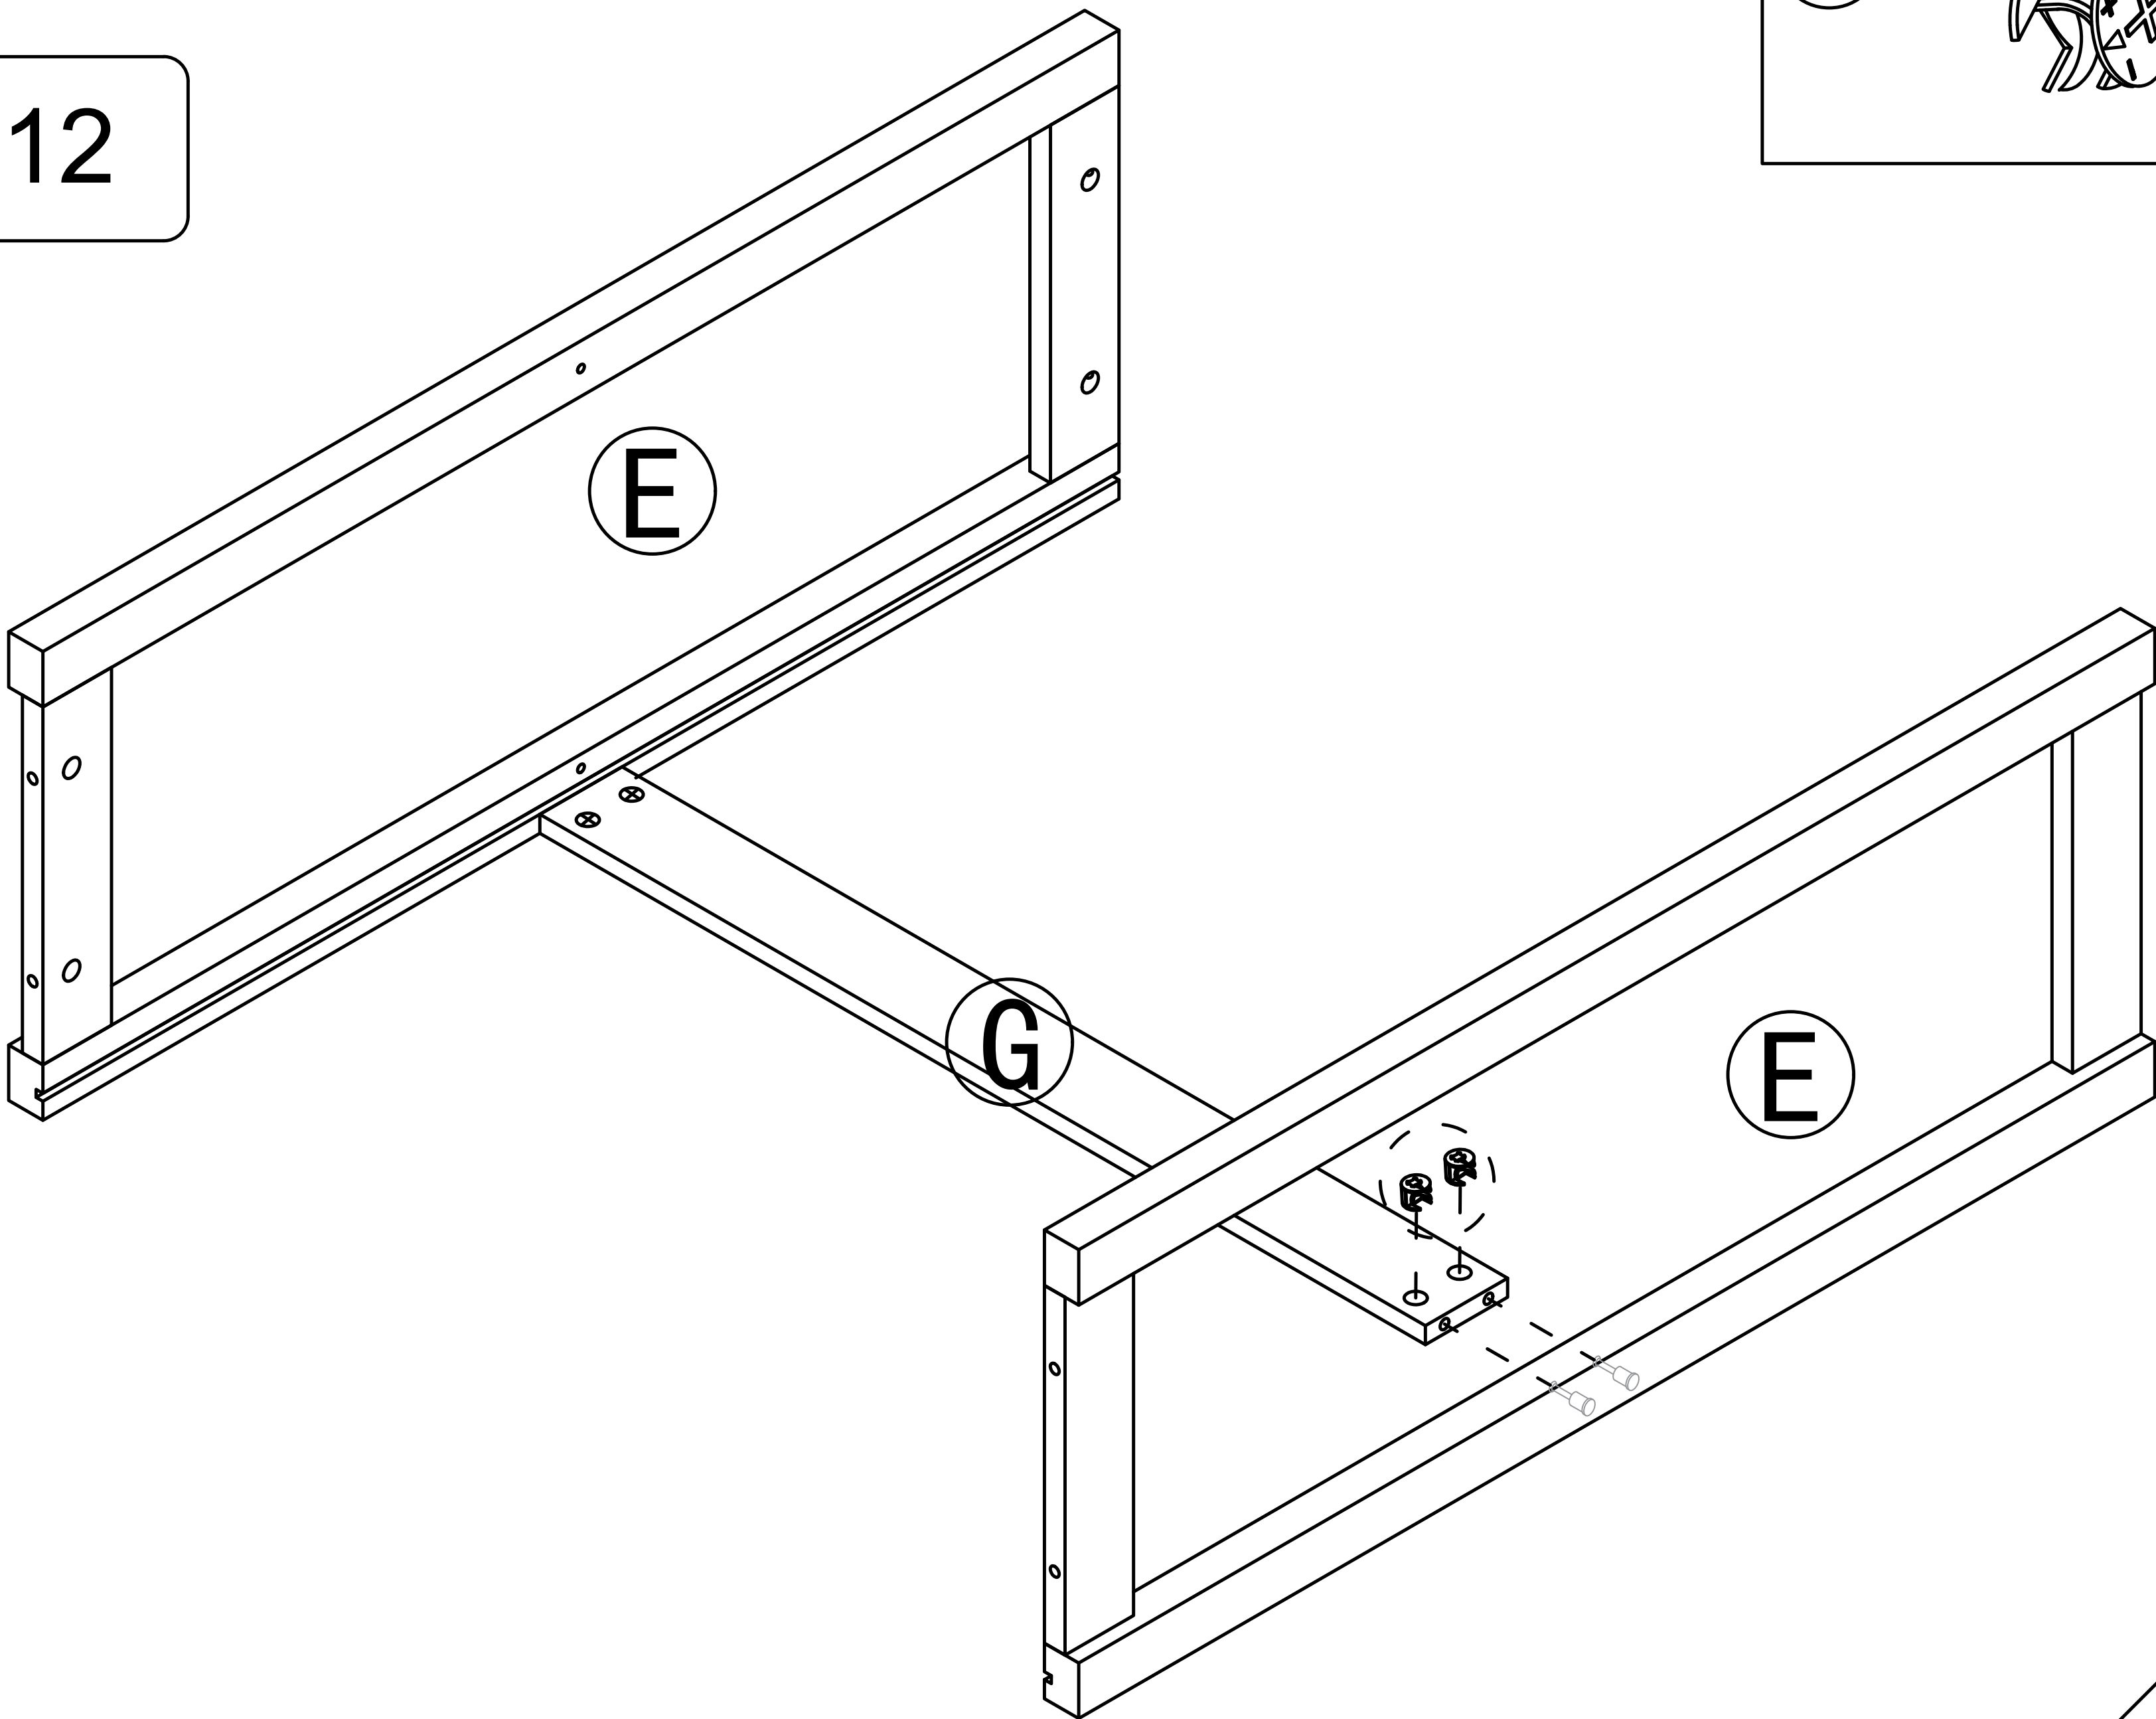

Step 13

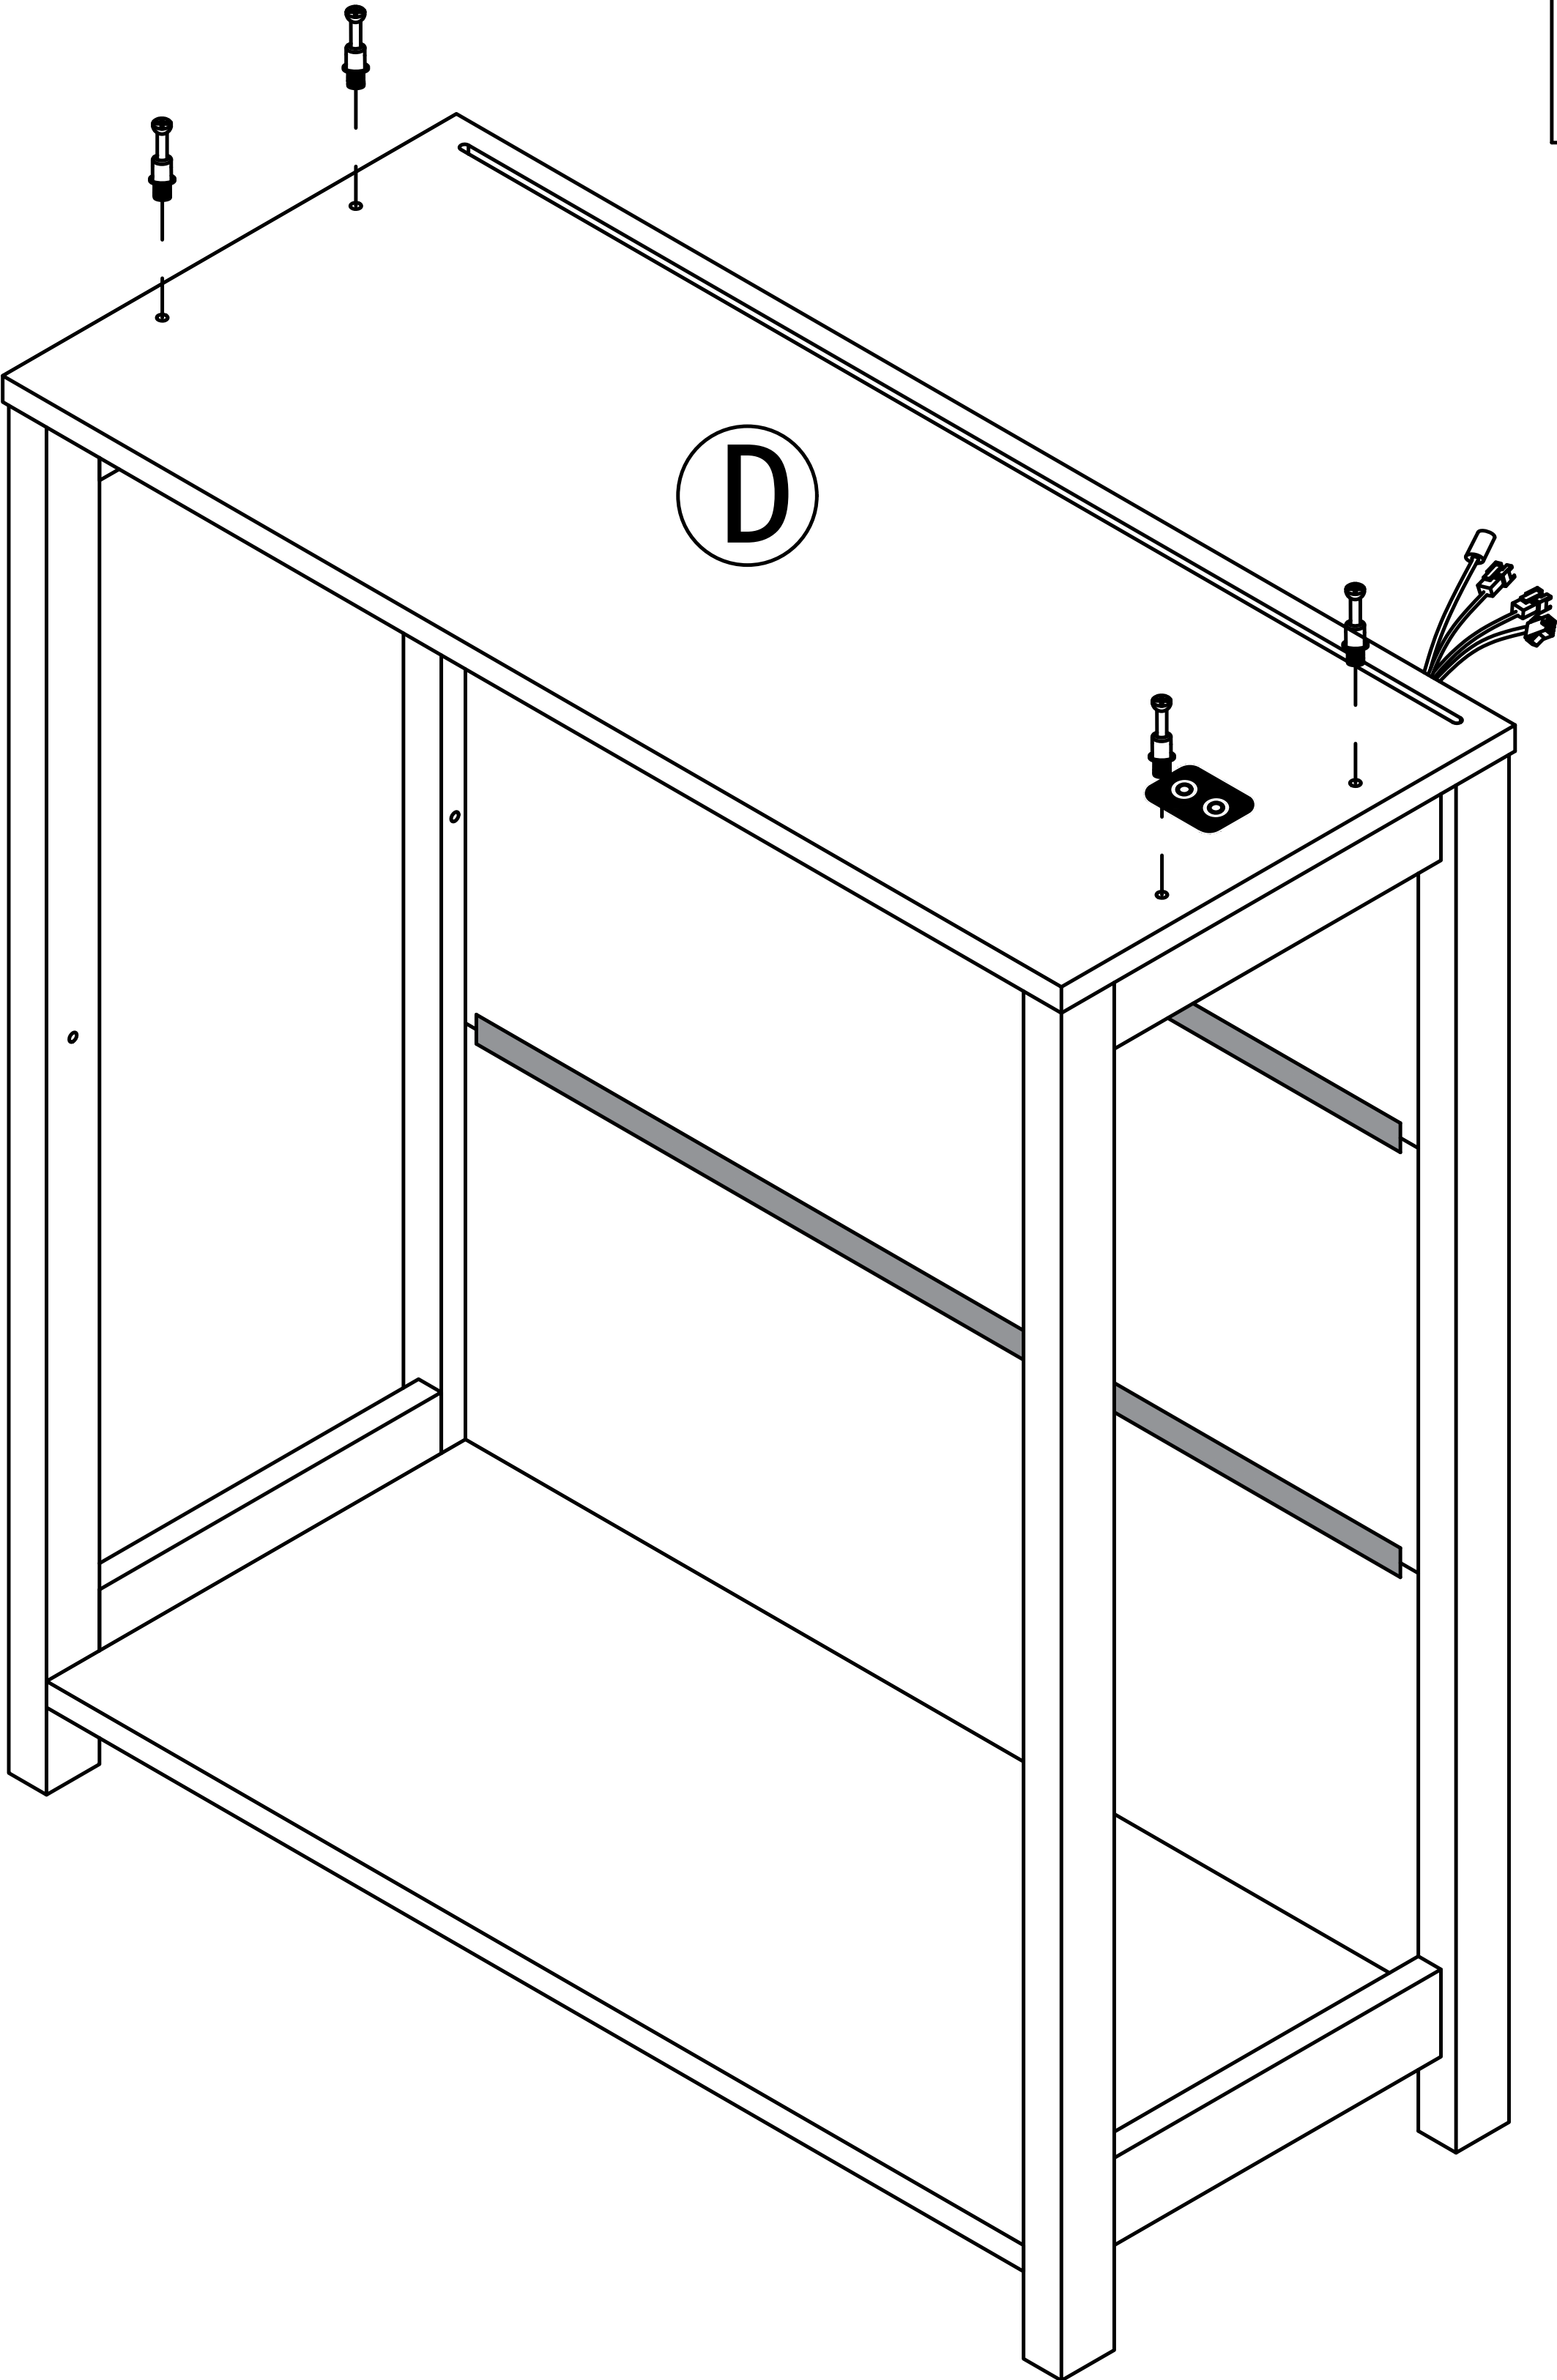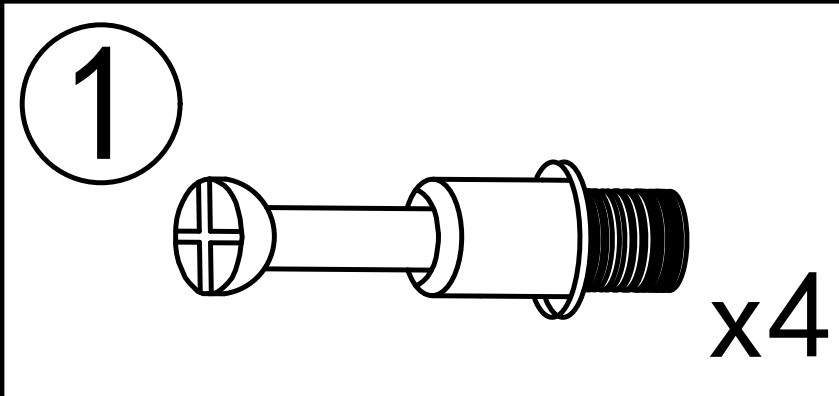


Step 14

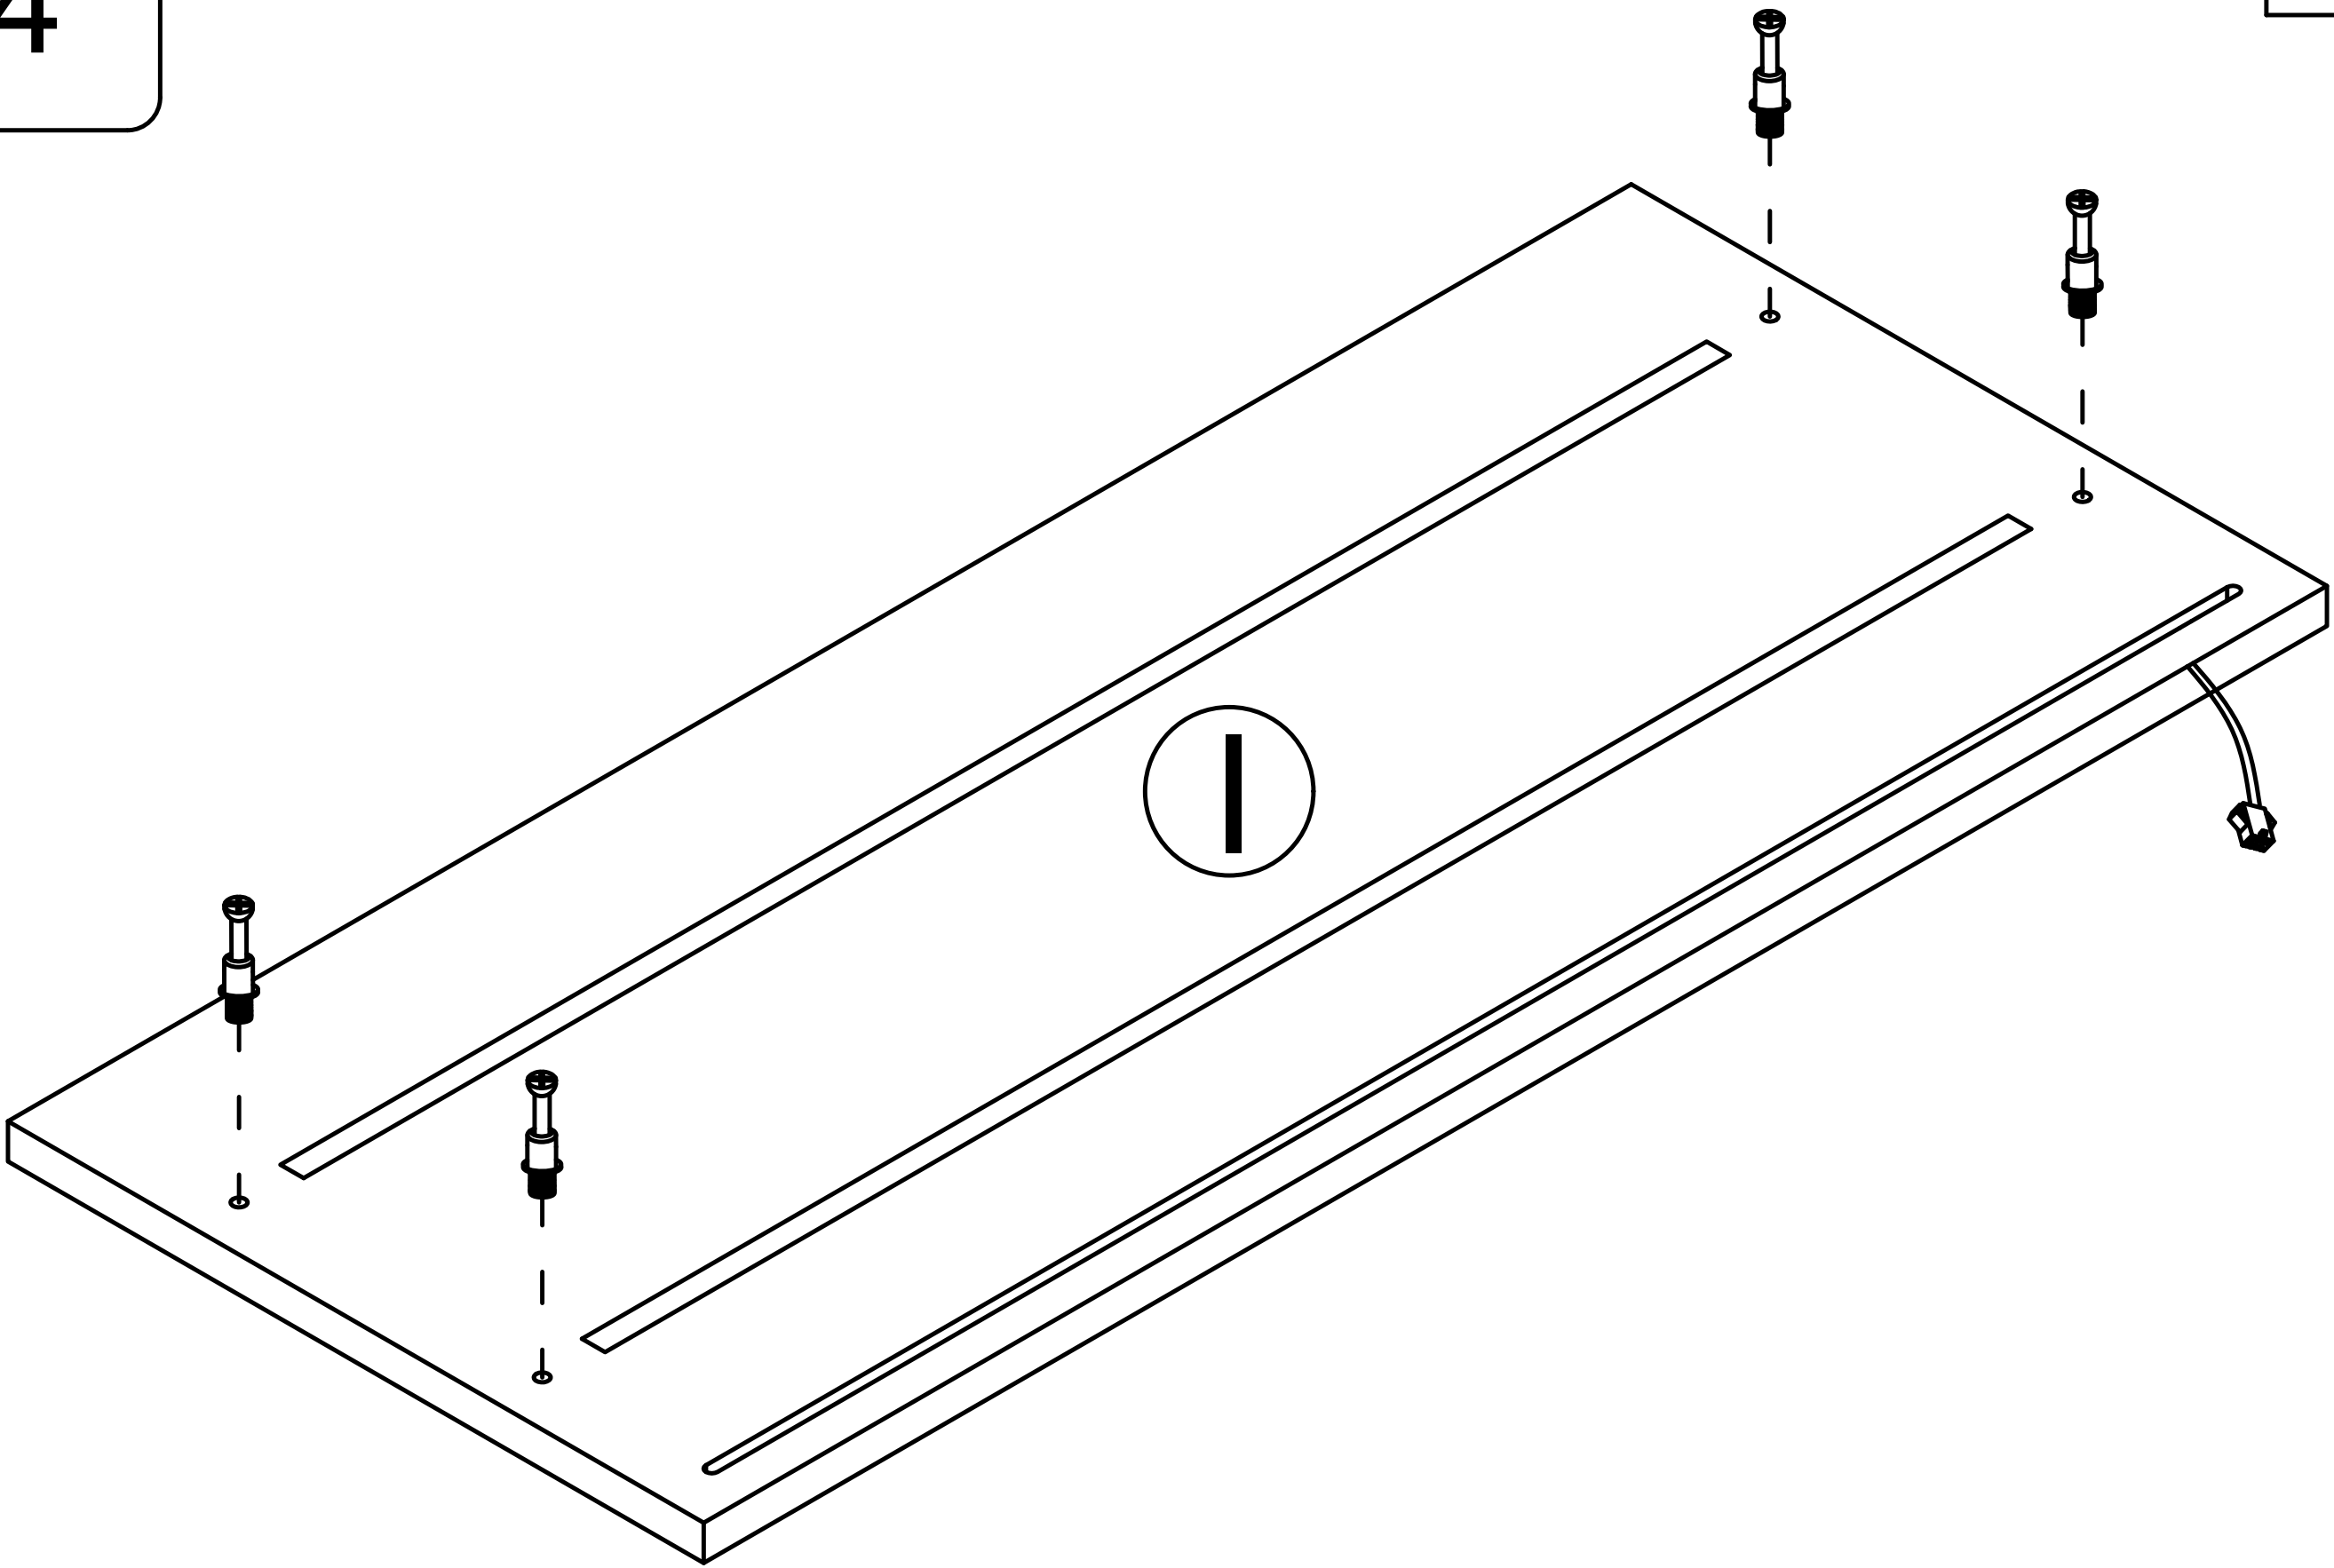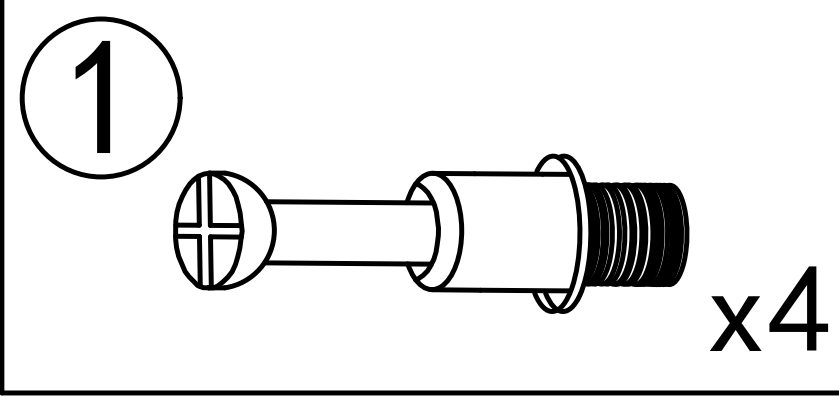


Step 15

2




x4


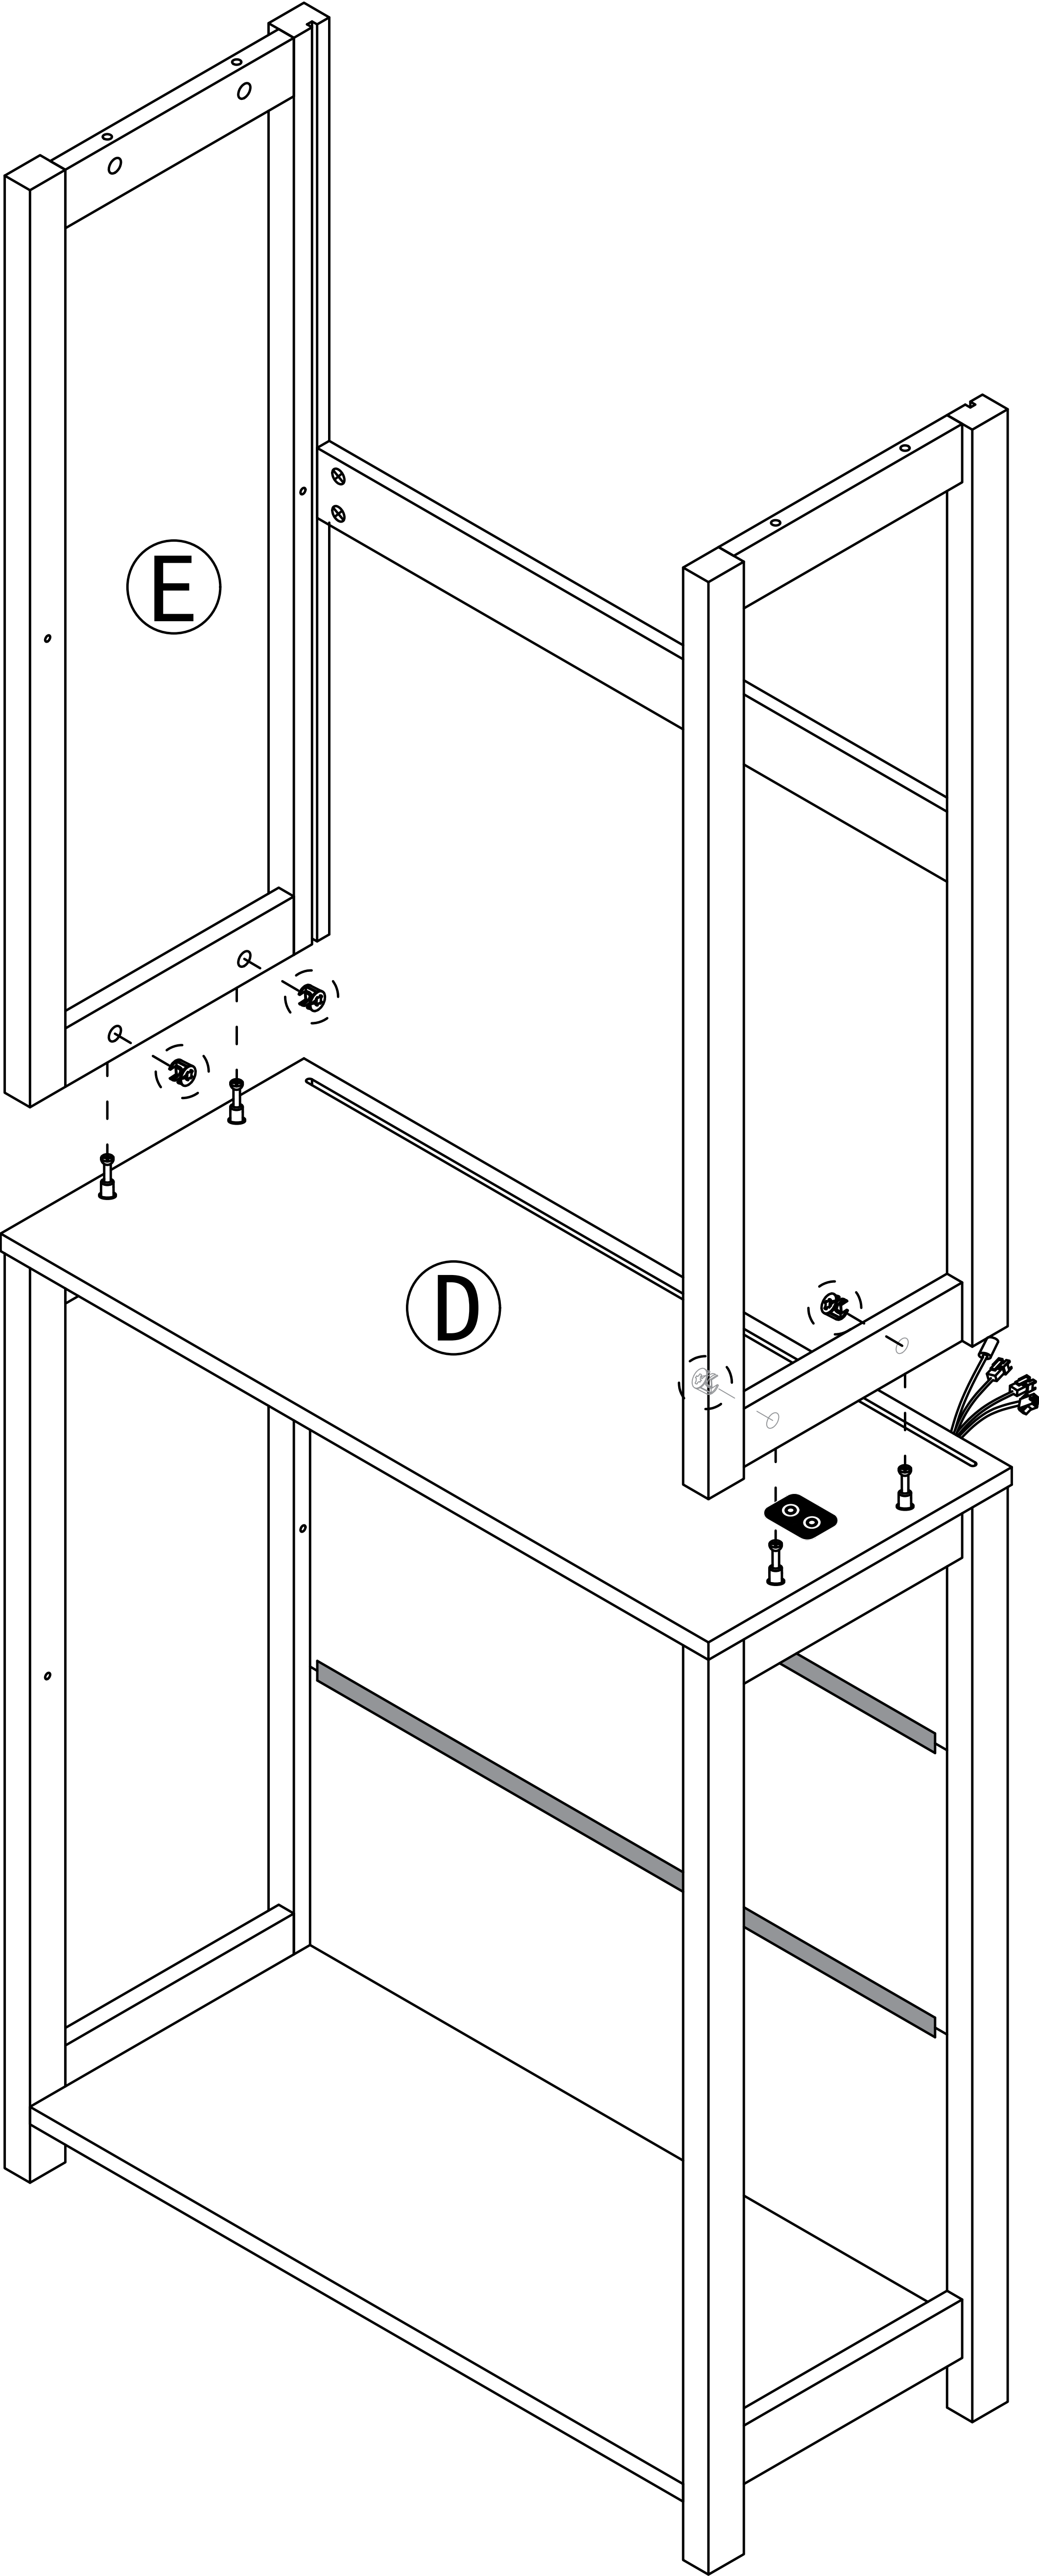


Step 16

5 x2

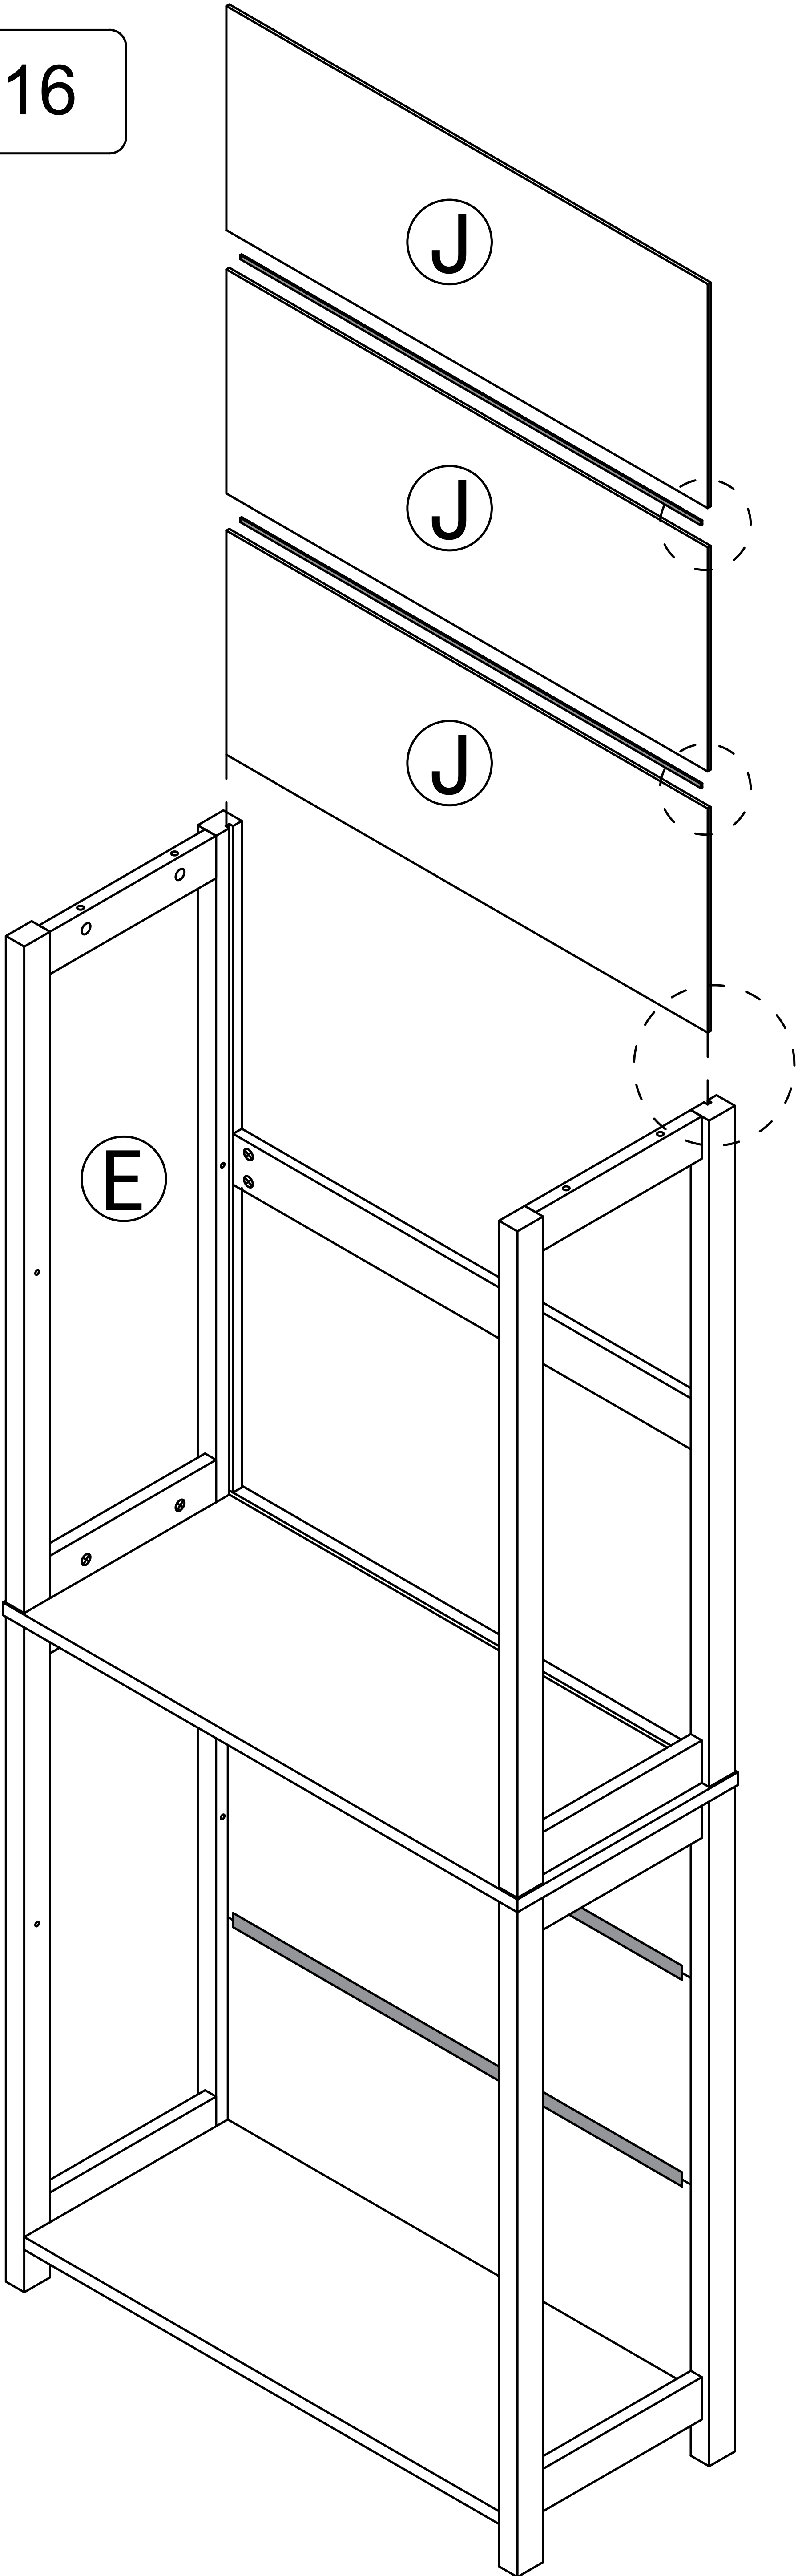


Place the "J" board, Backboard card strip, and "J" board in order

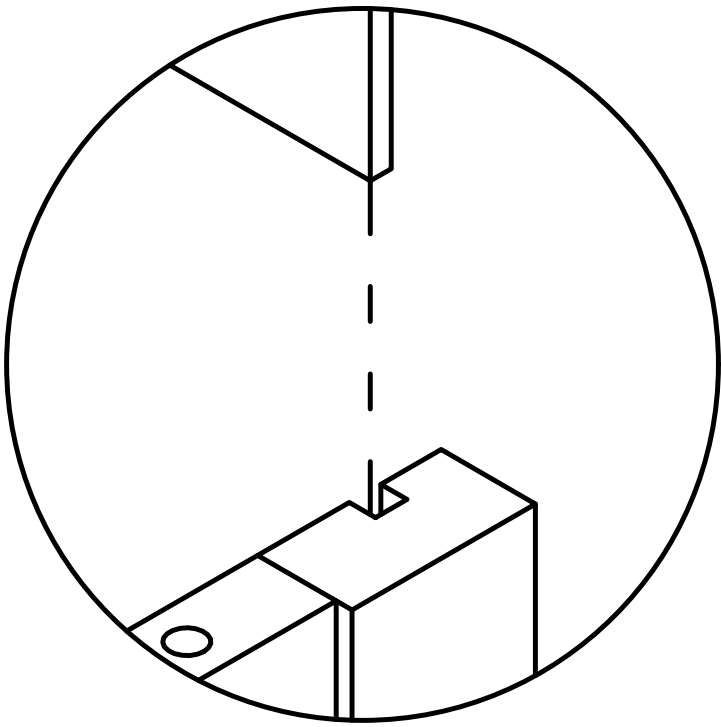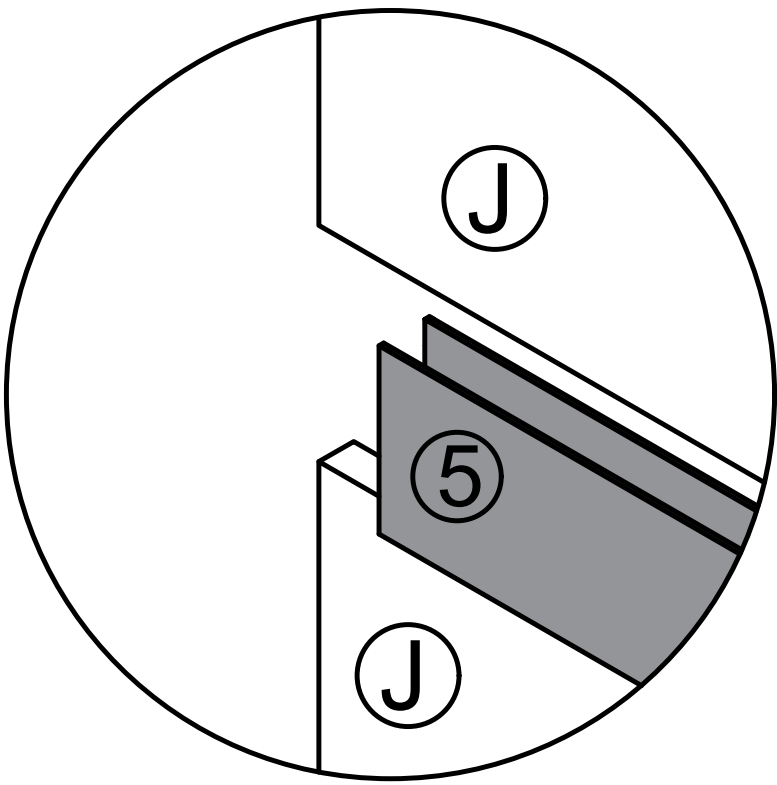


Step 17

2






x4

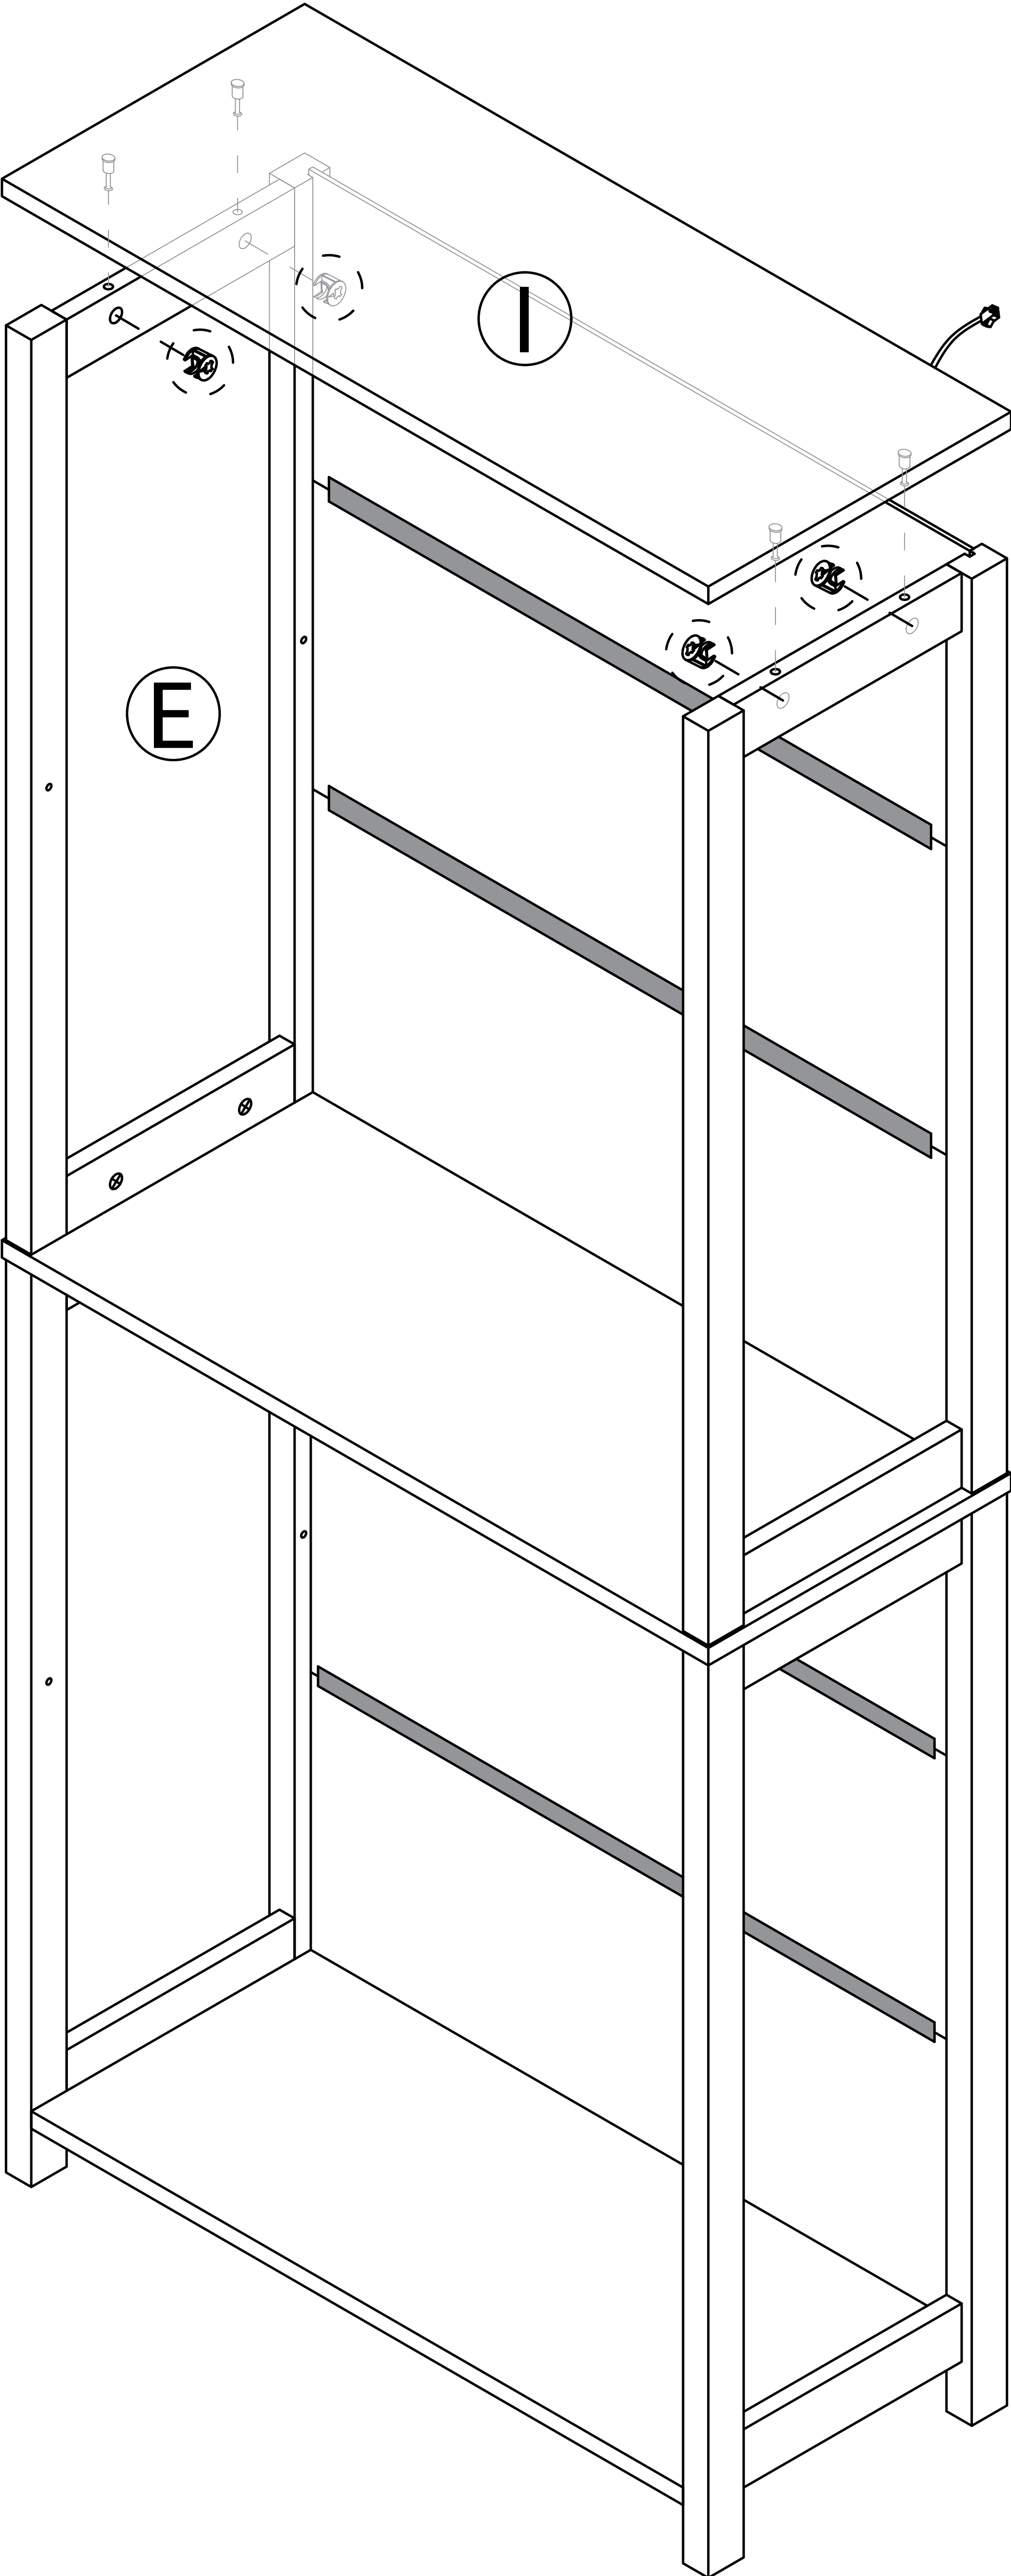


Step 18

7

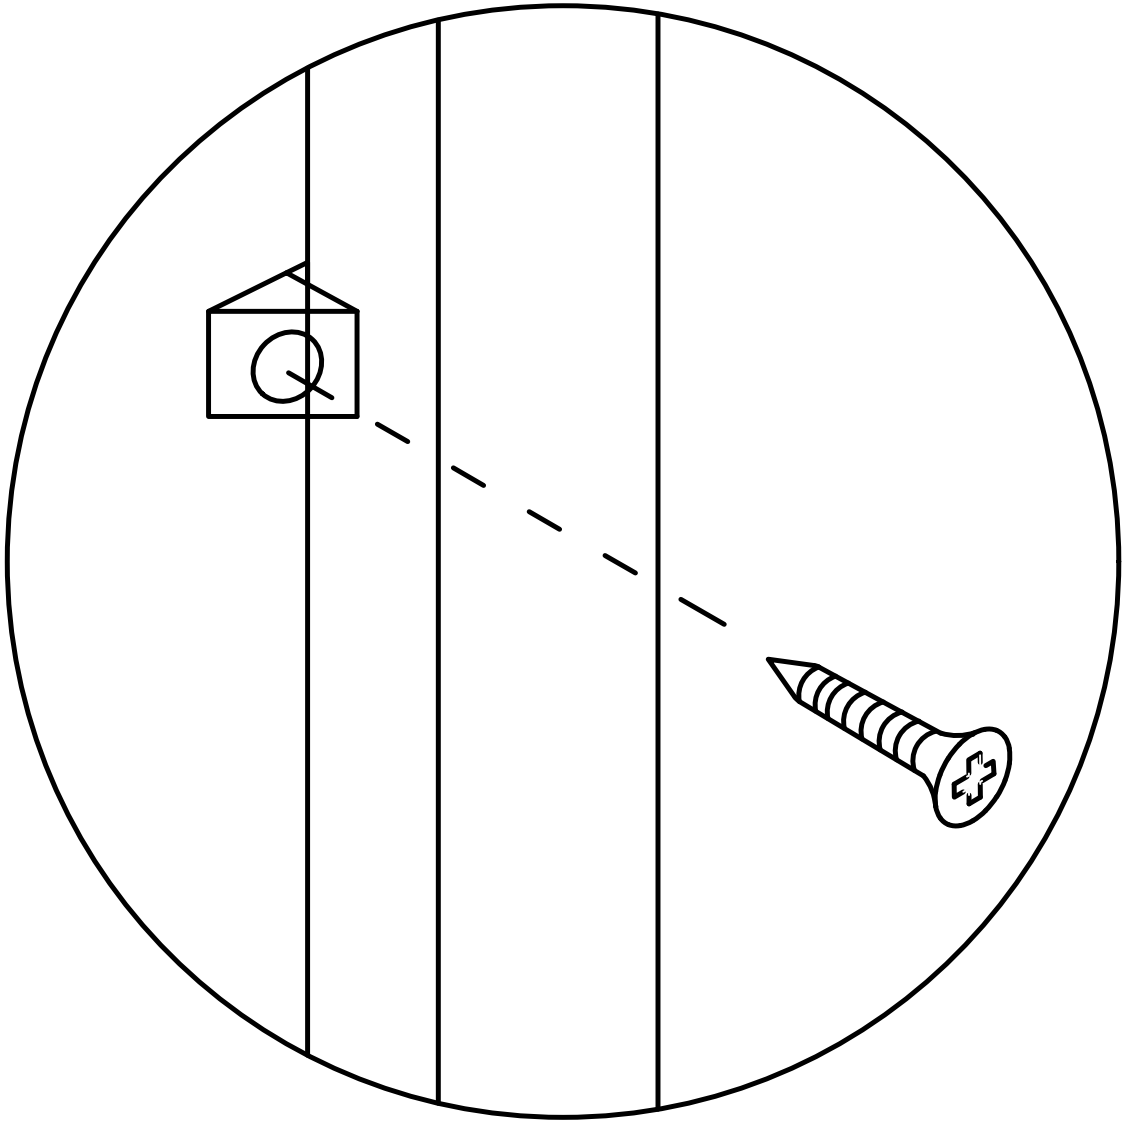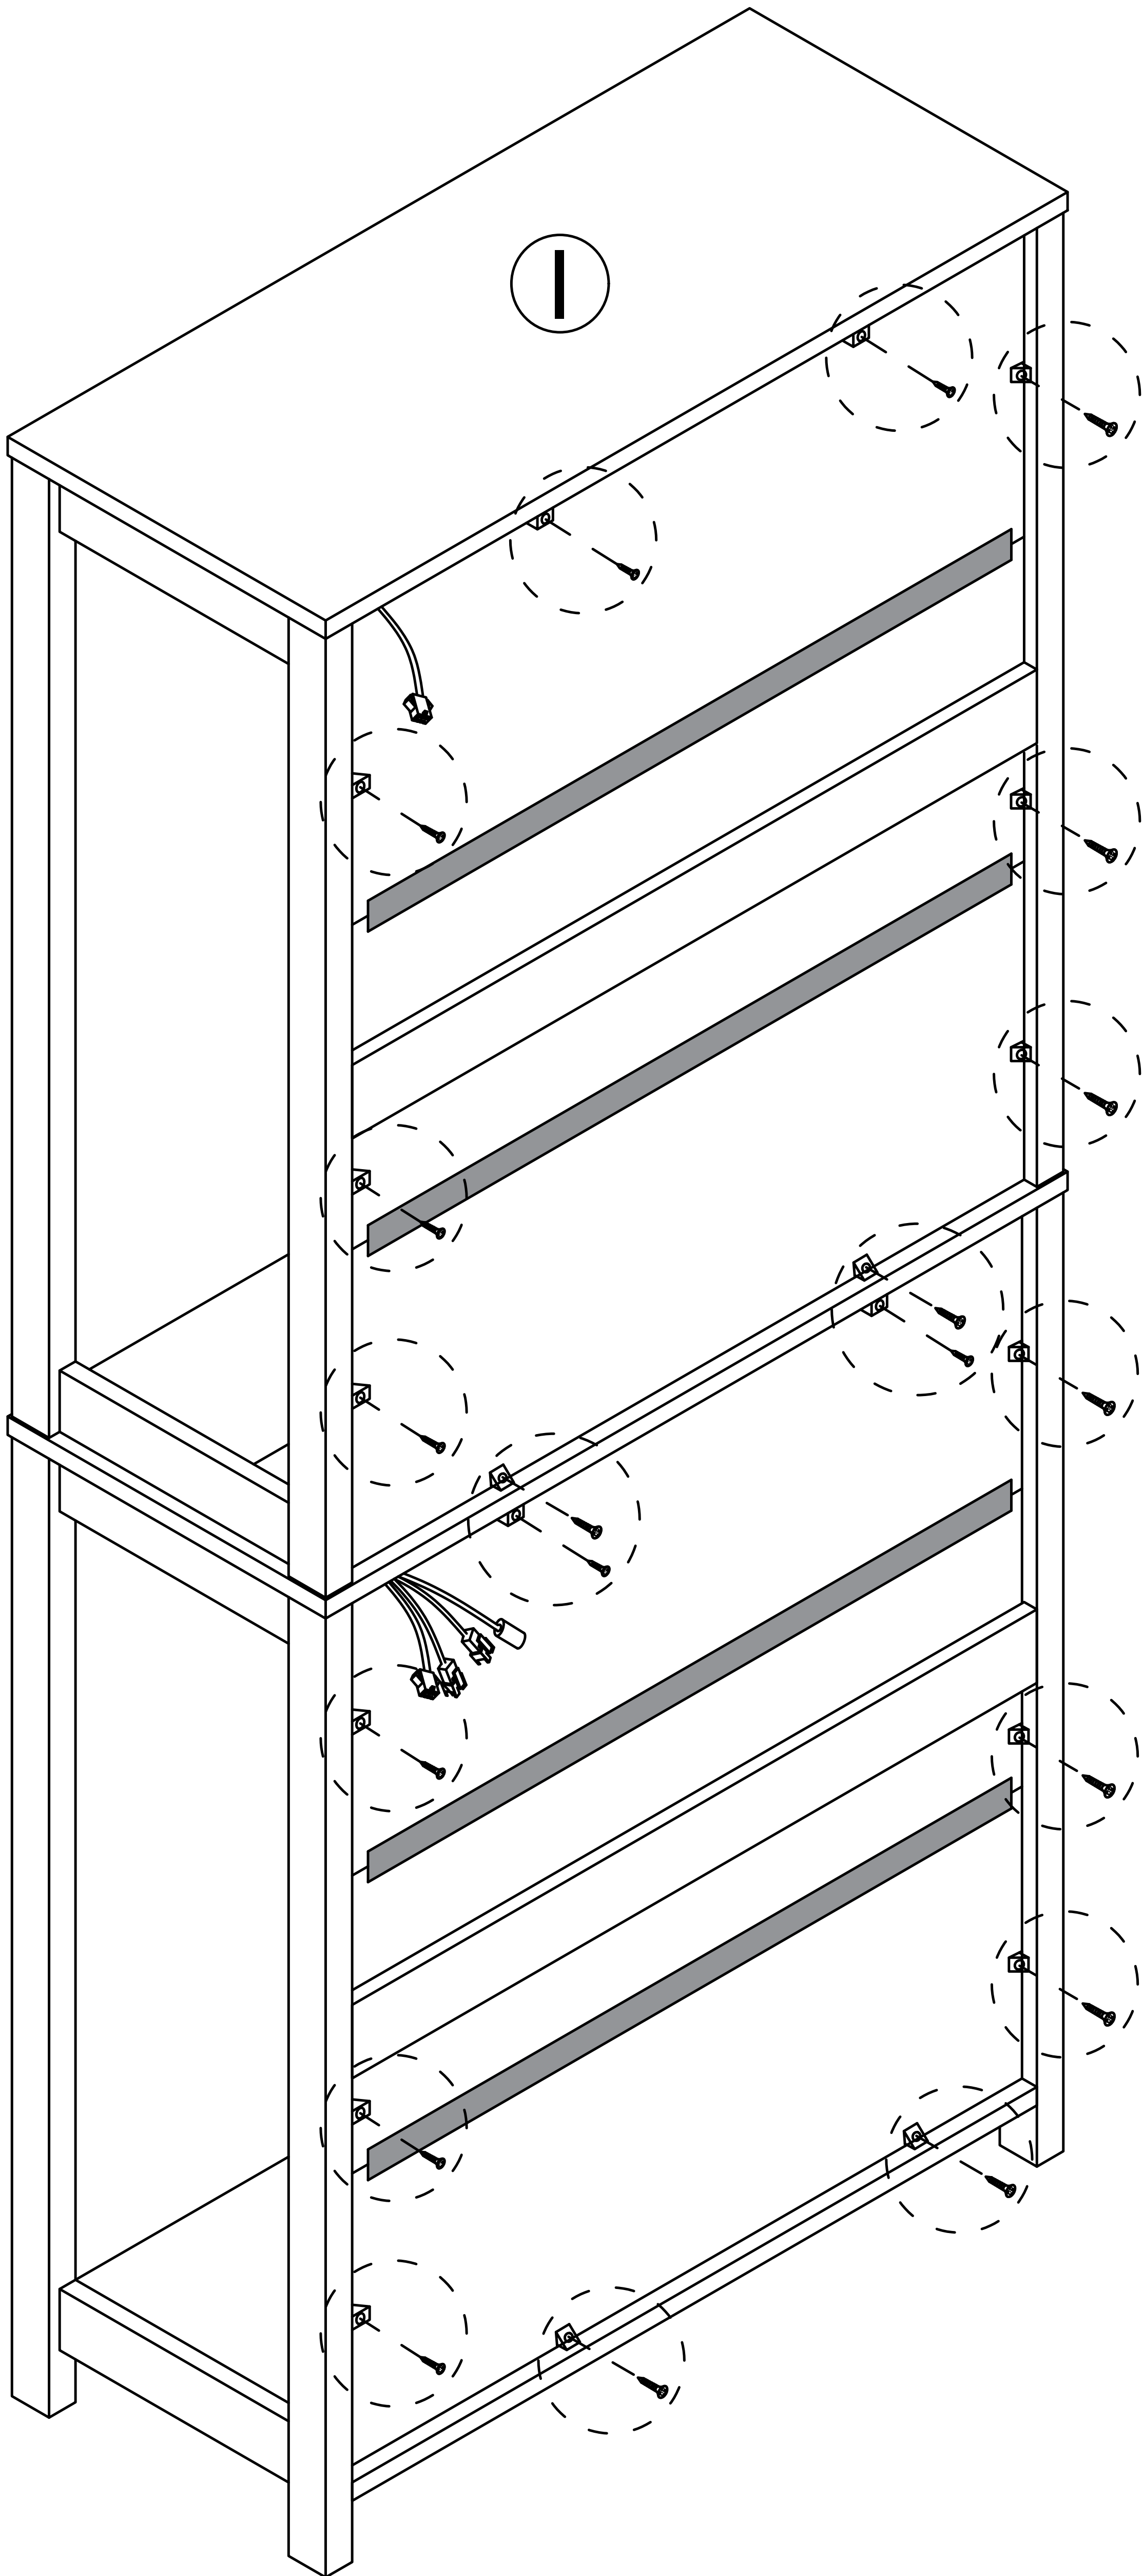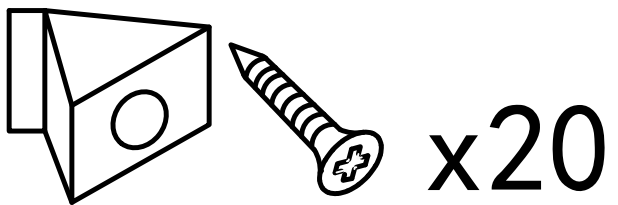


Step 19

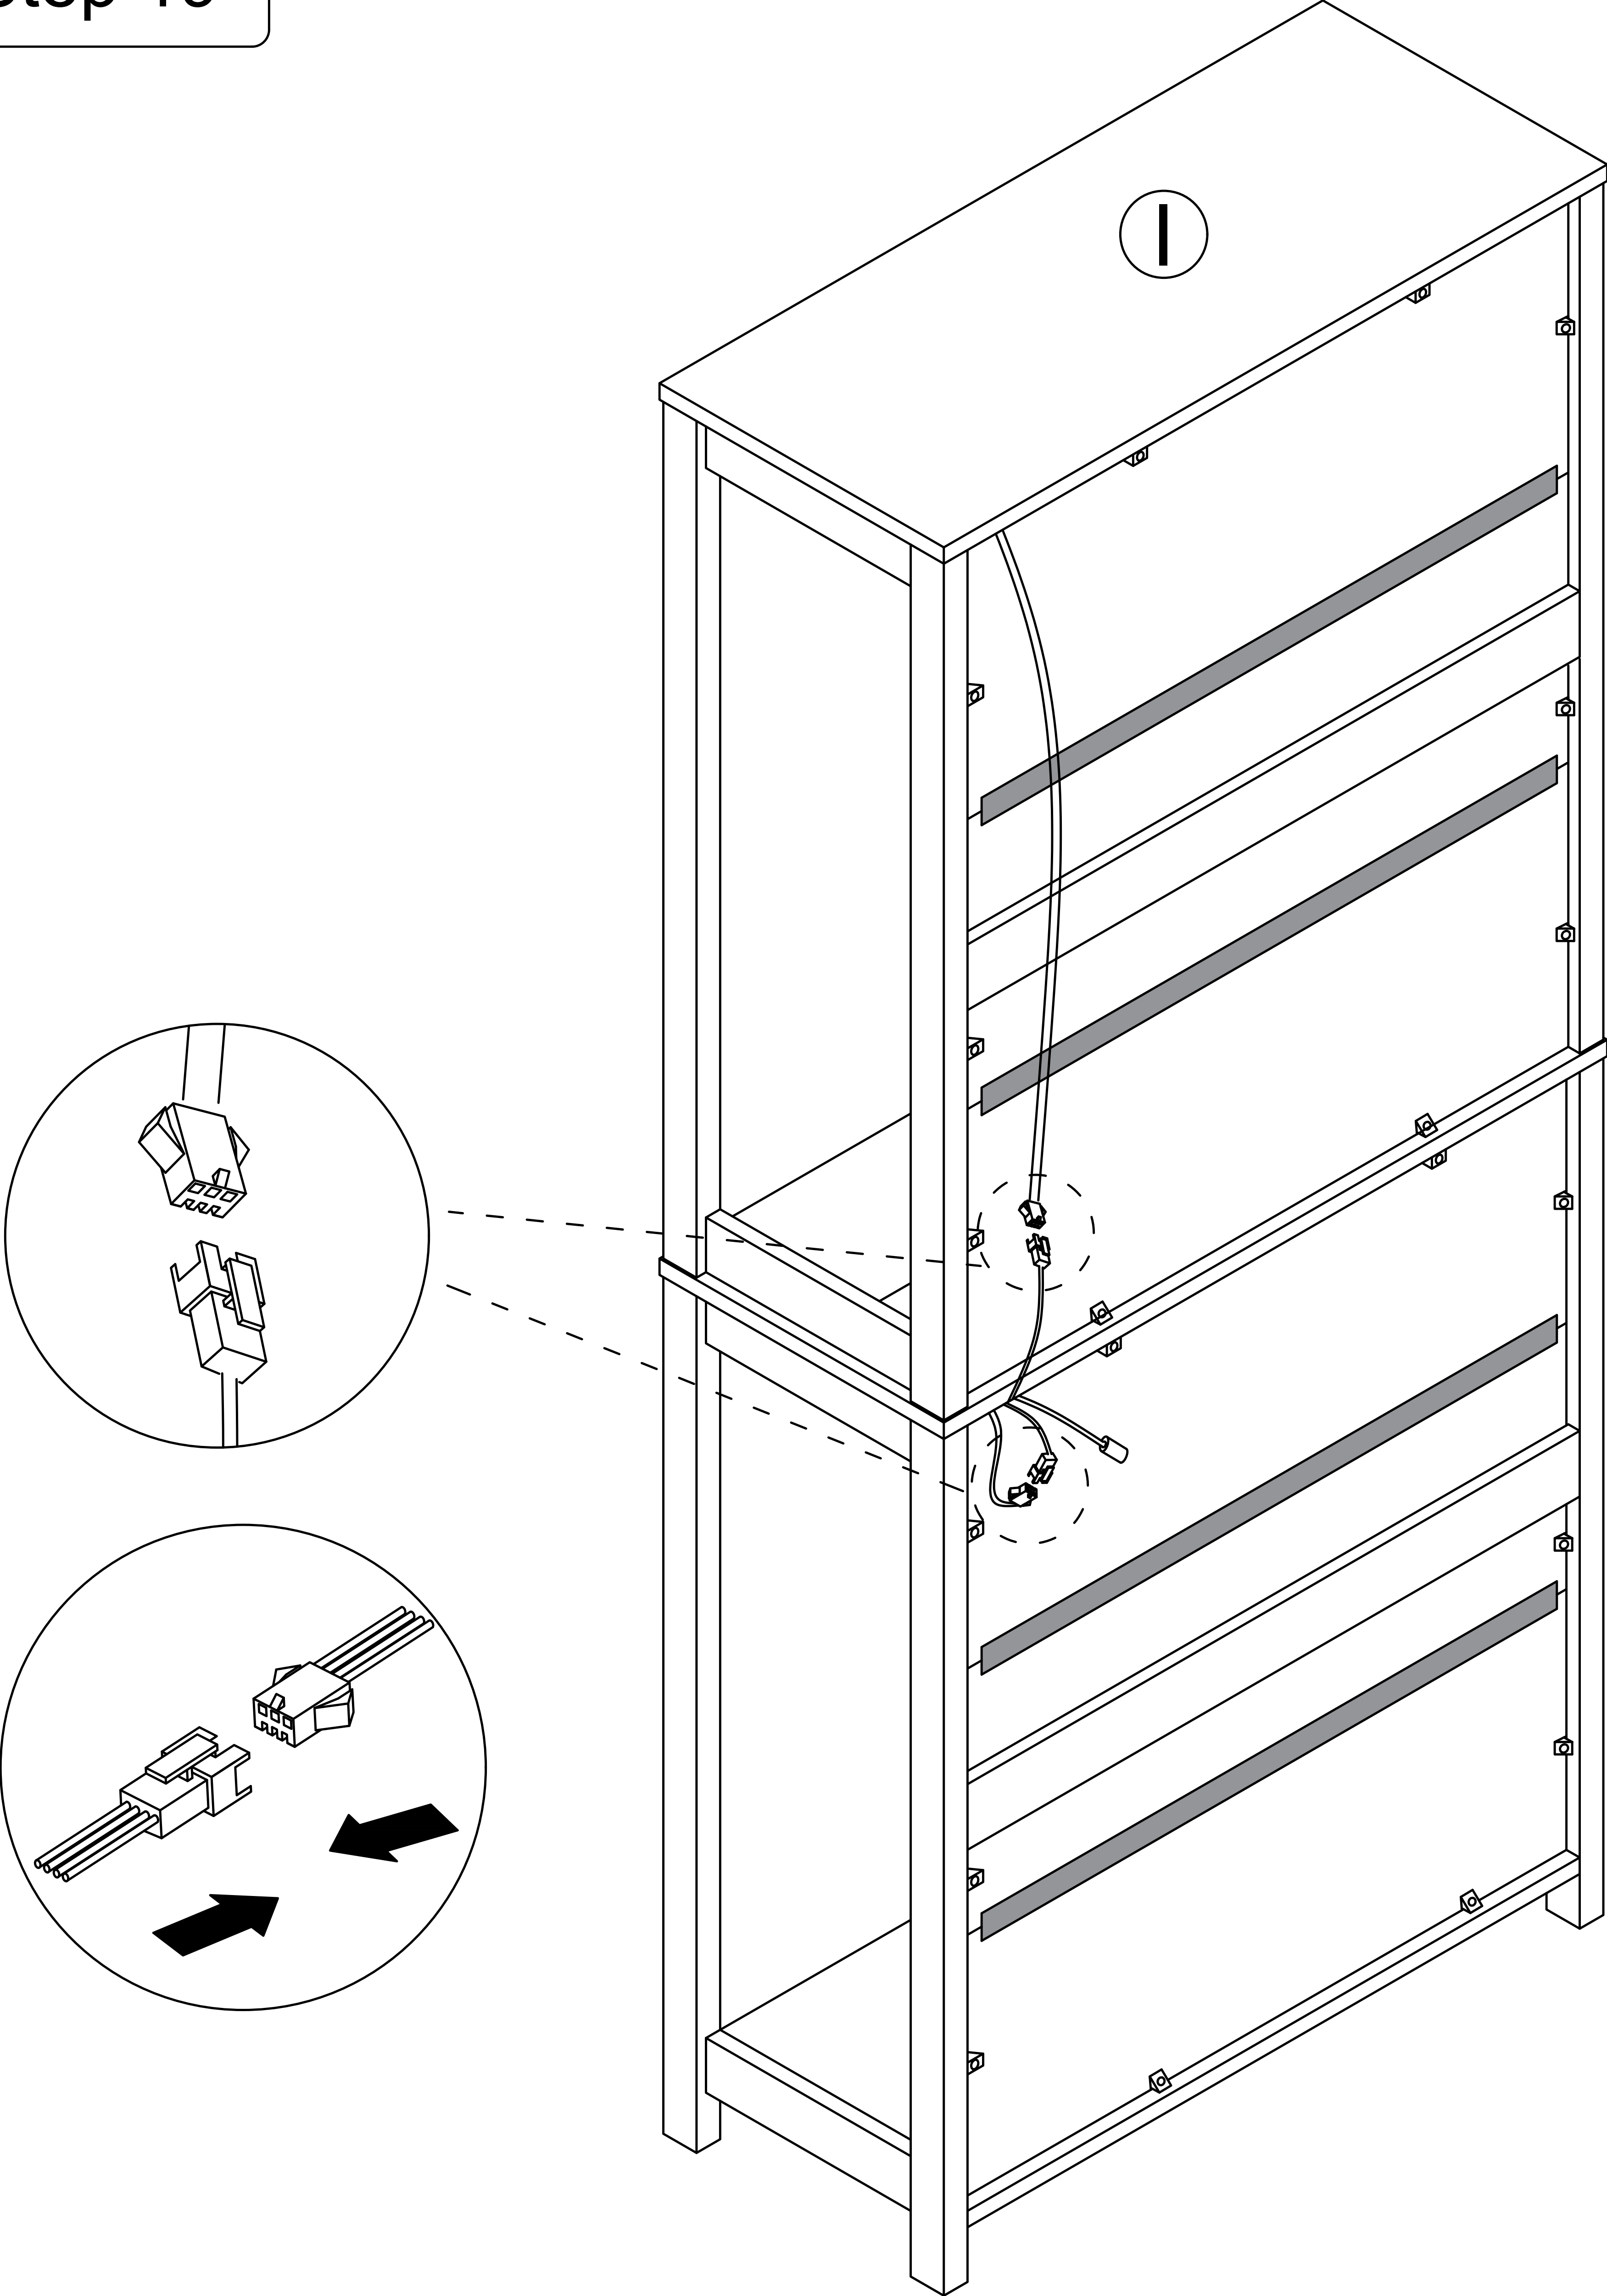


Step 20

6




x3

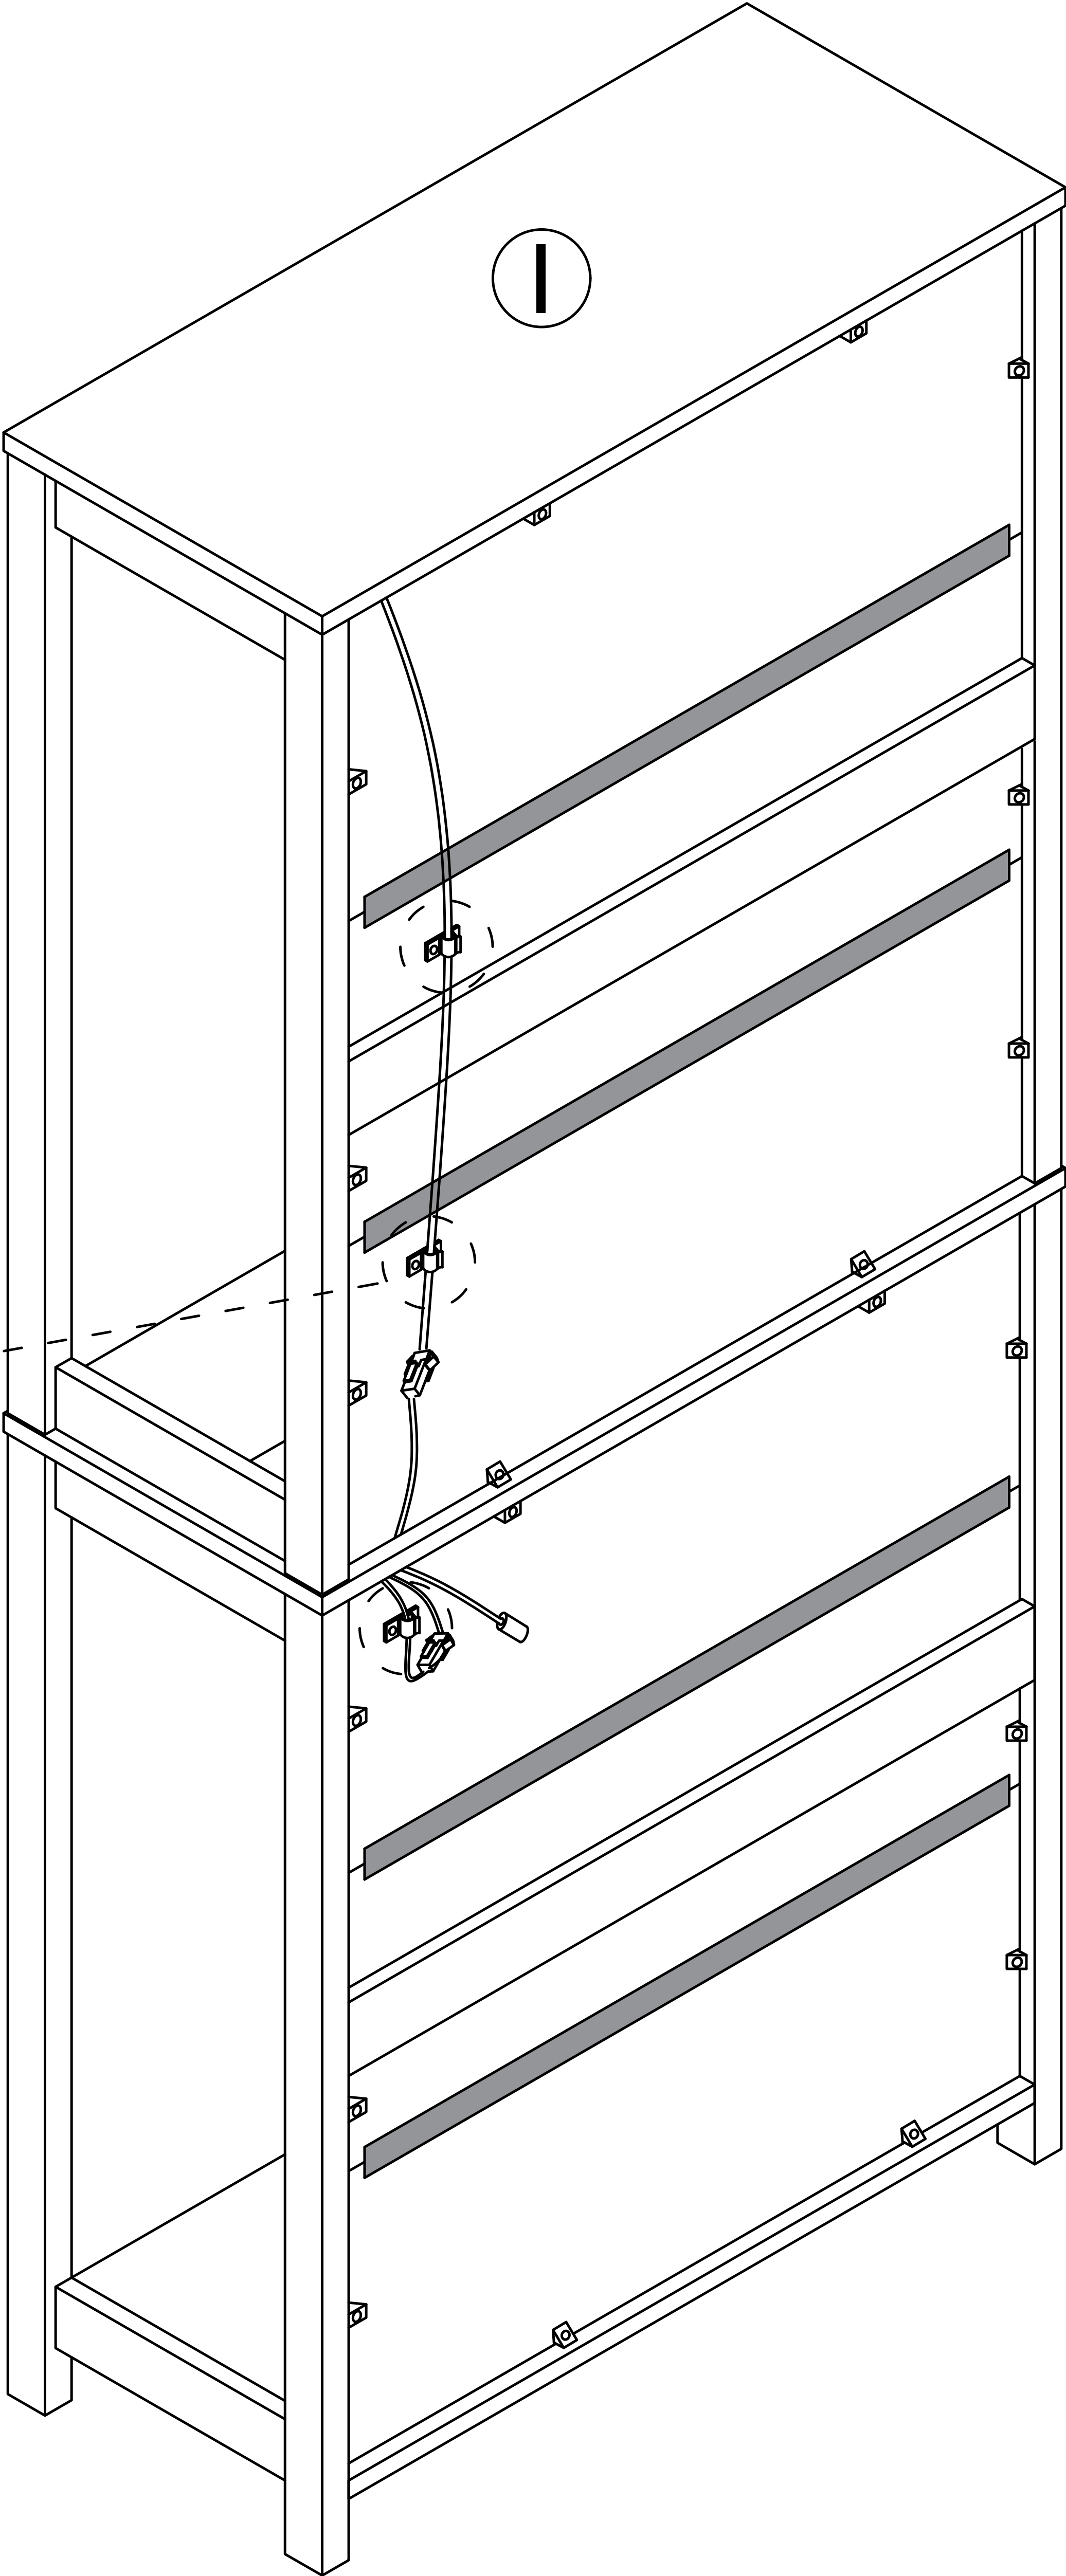


Step 21


8





x8

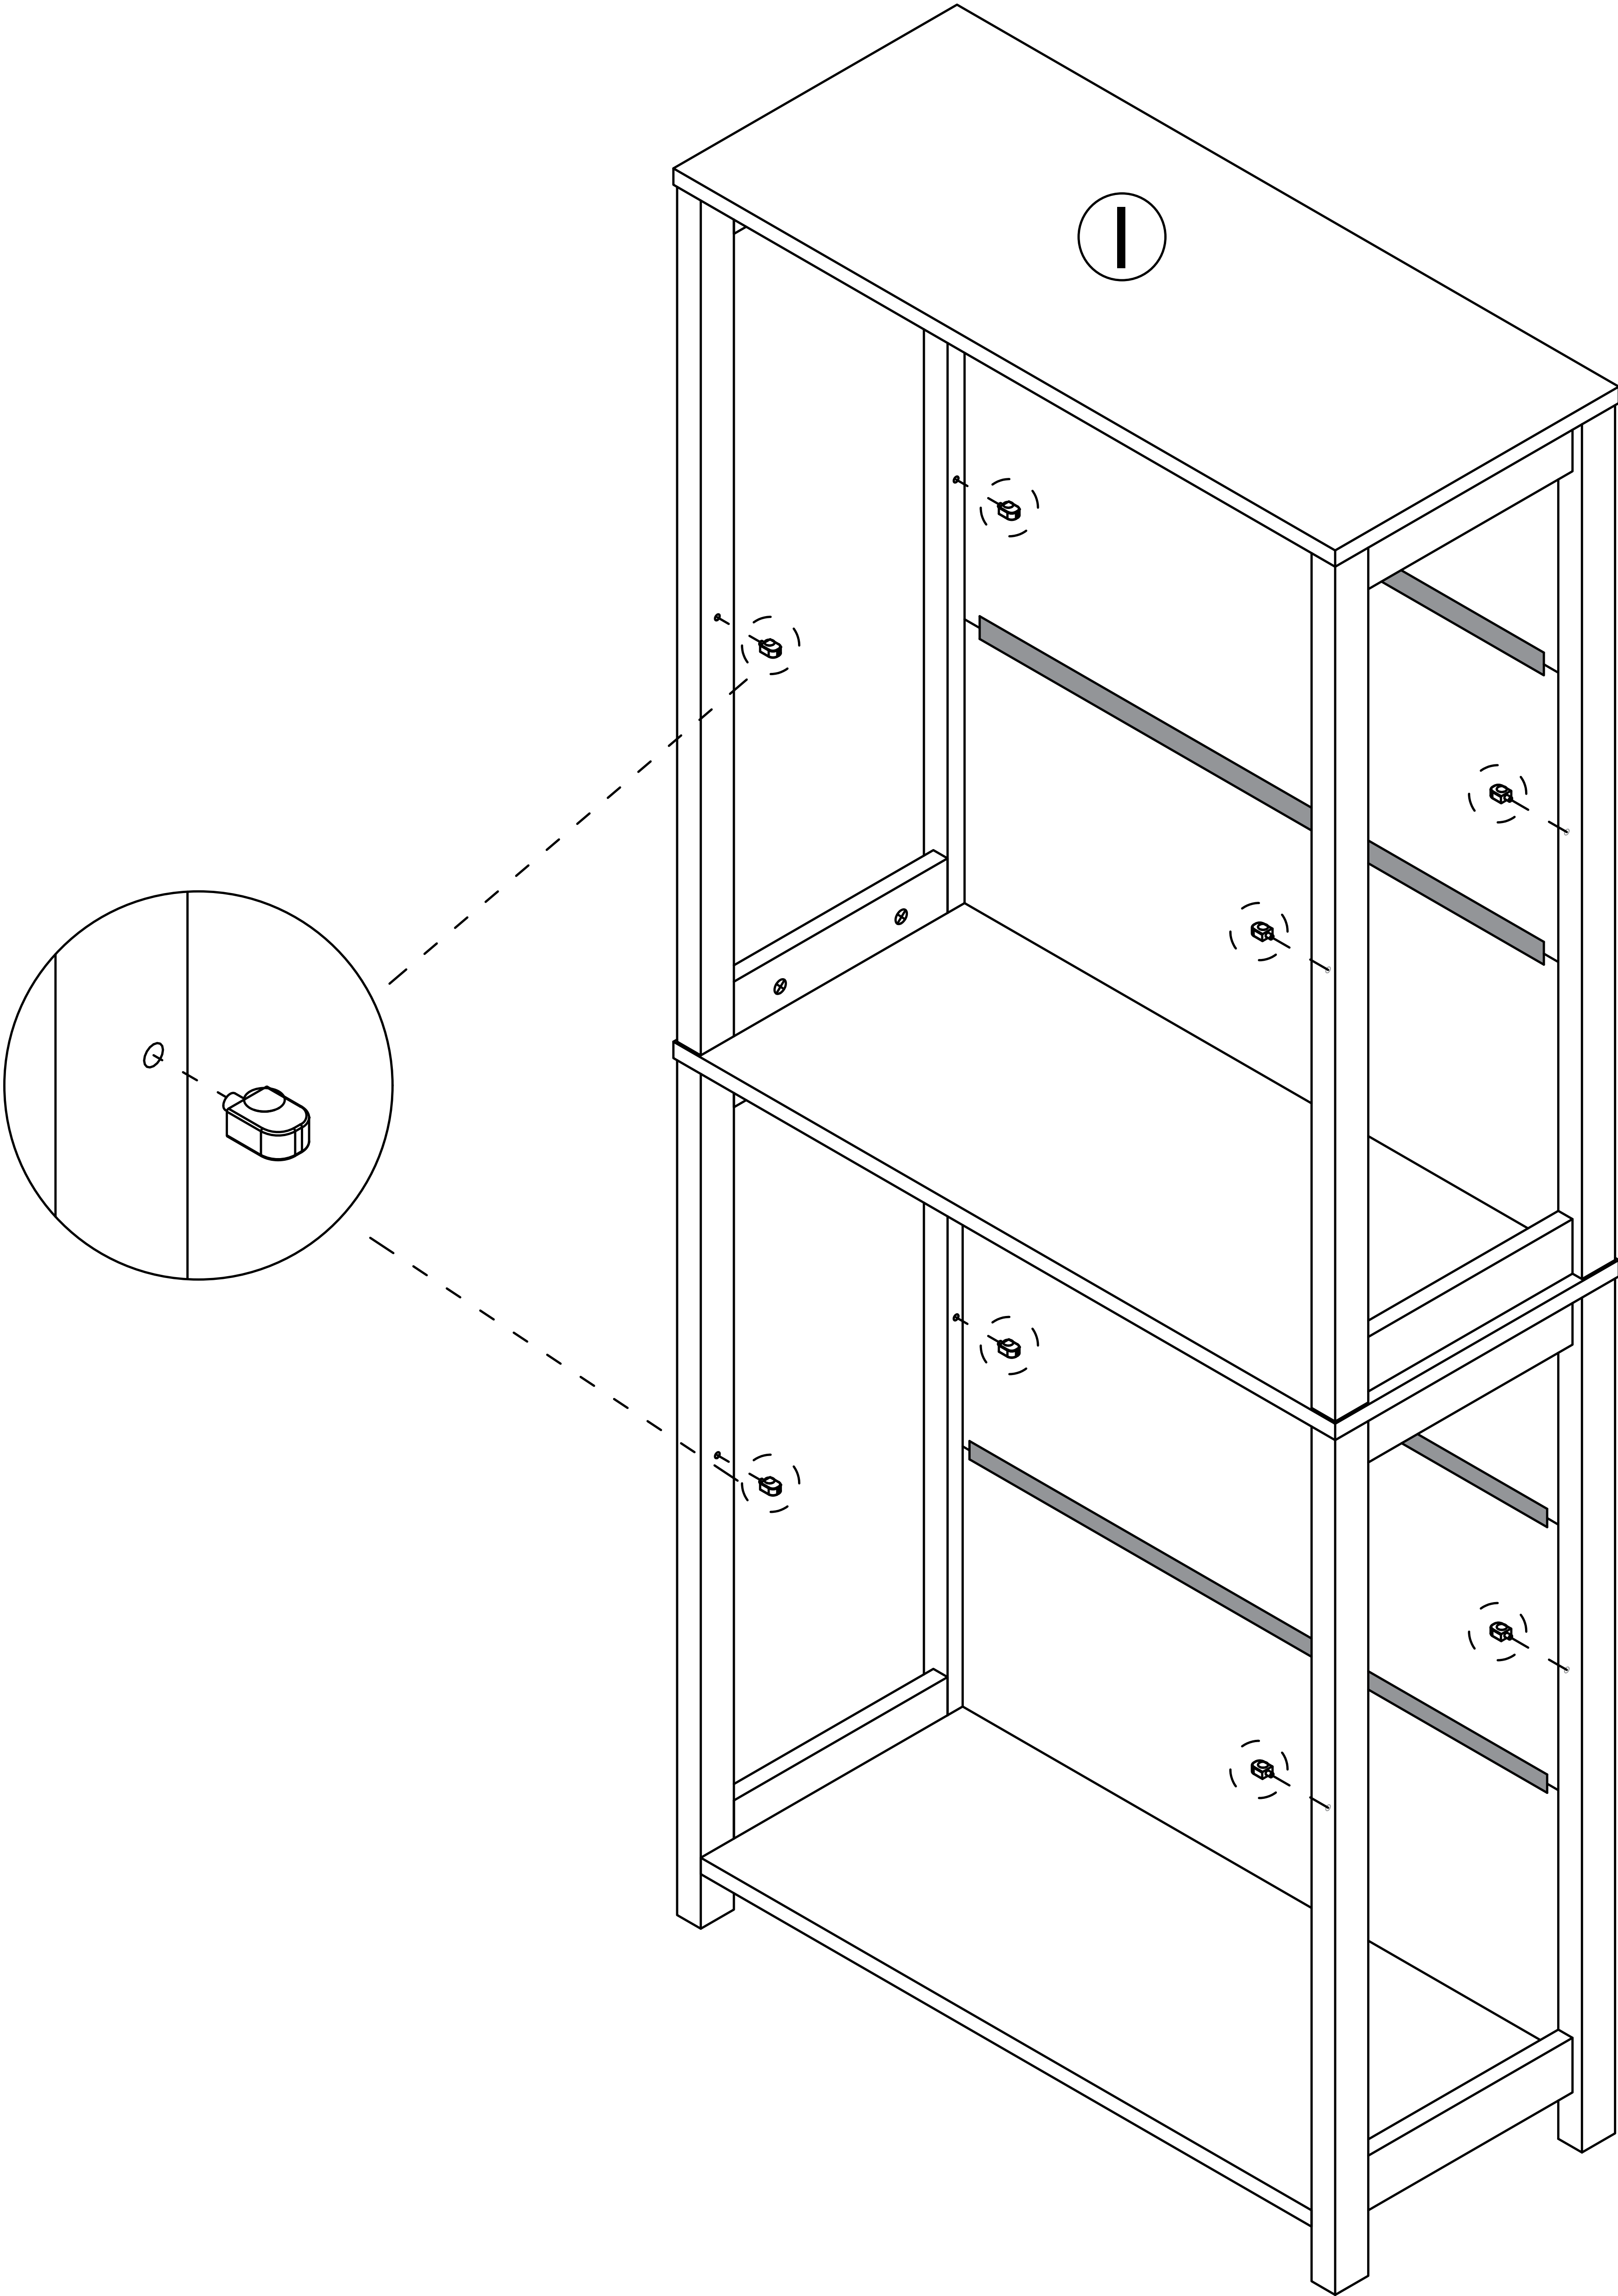

Step 22

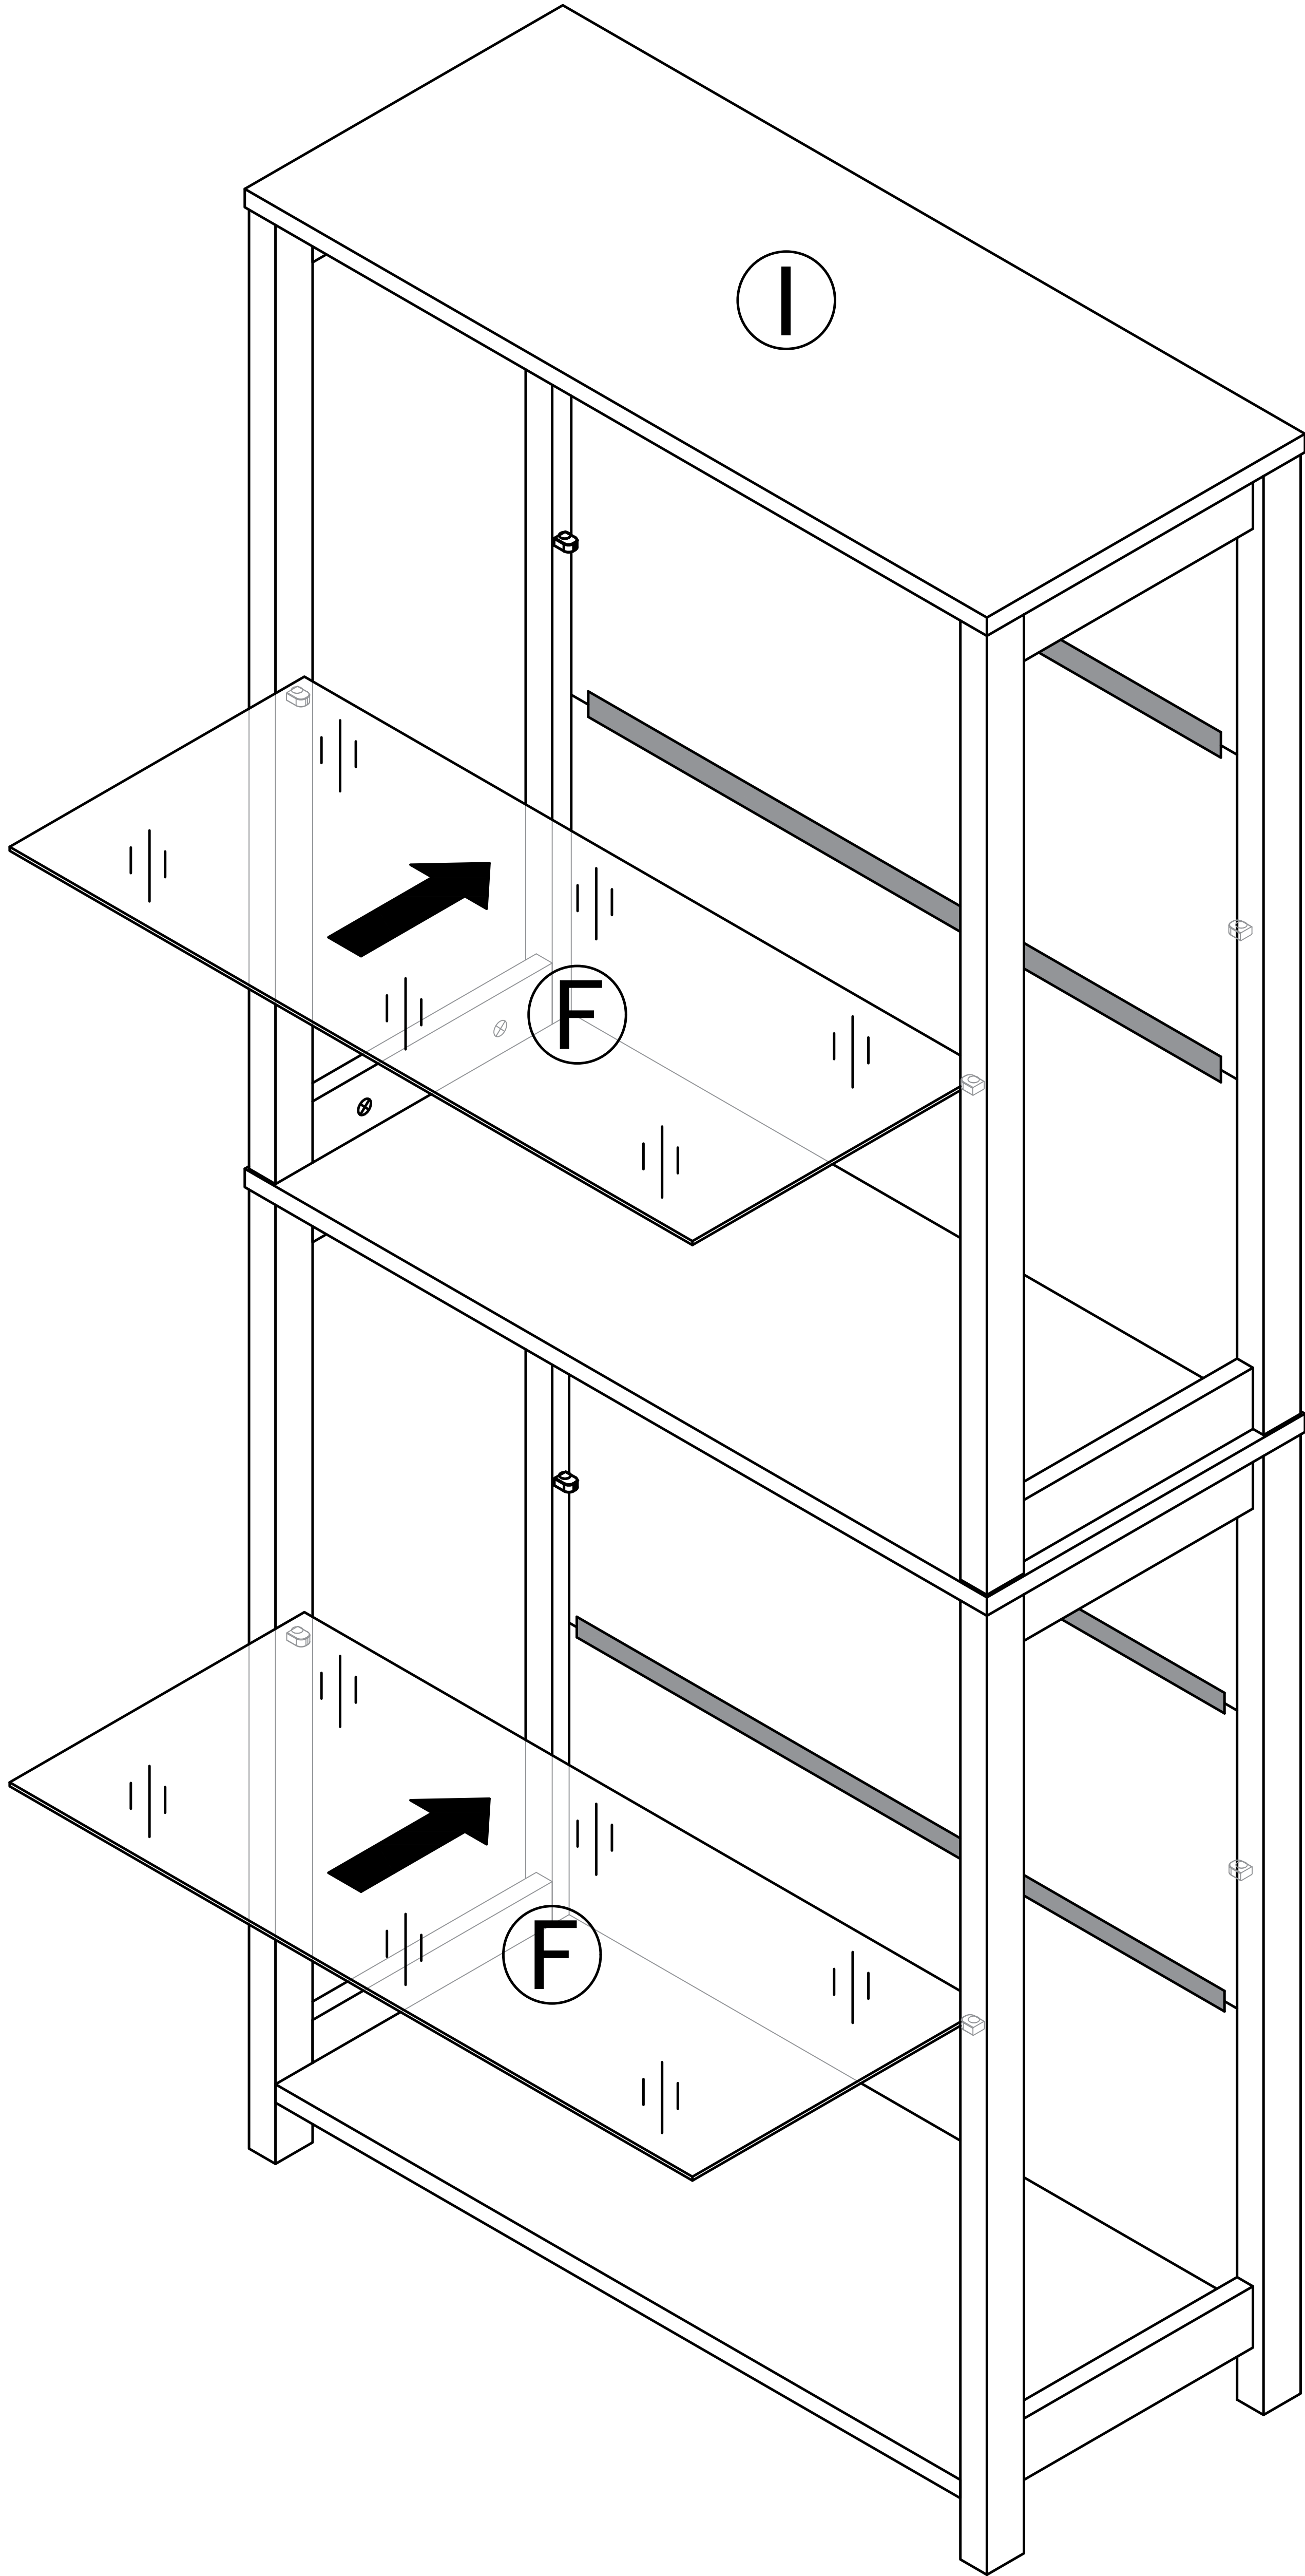


Step 23

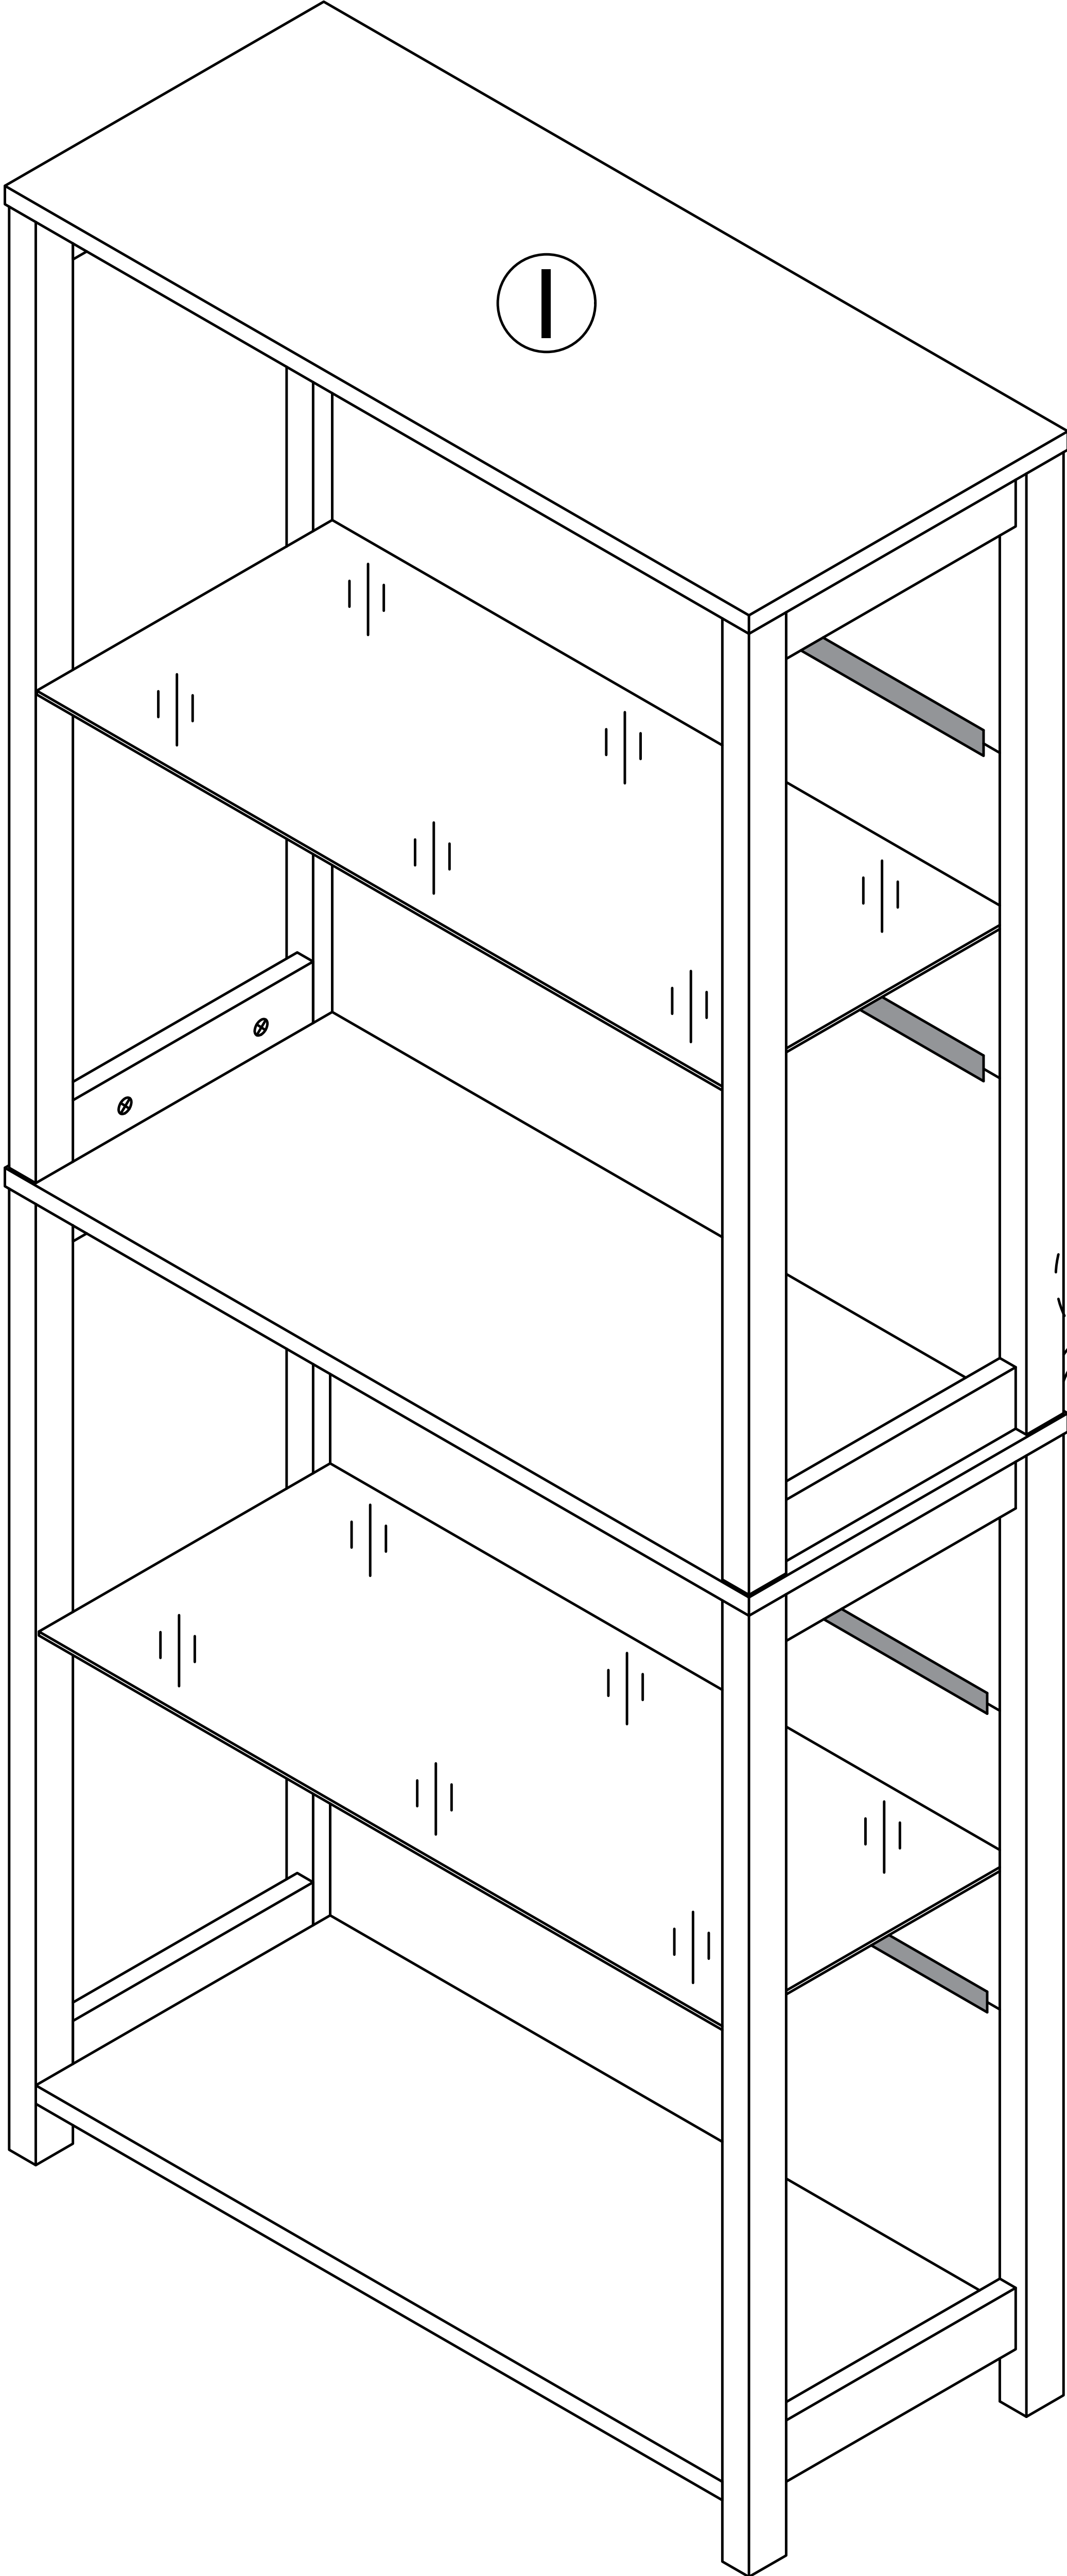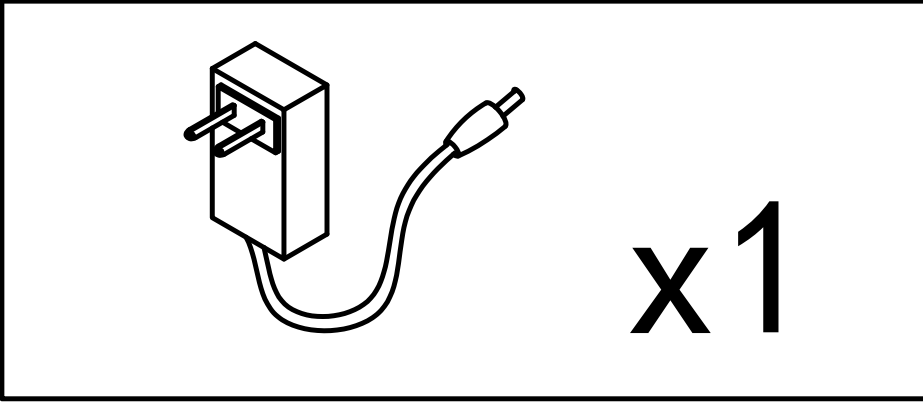


Step 24




Install as required

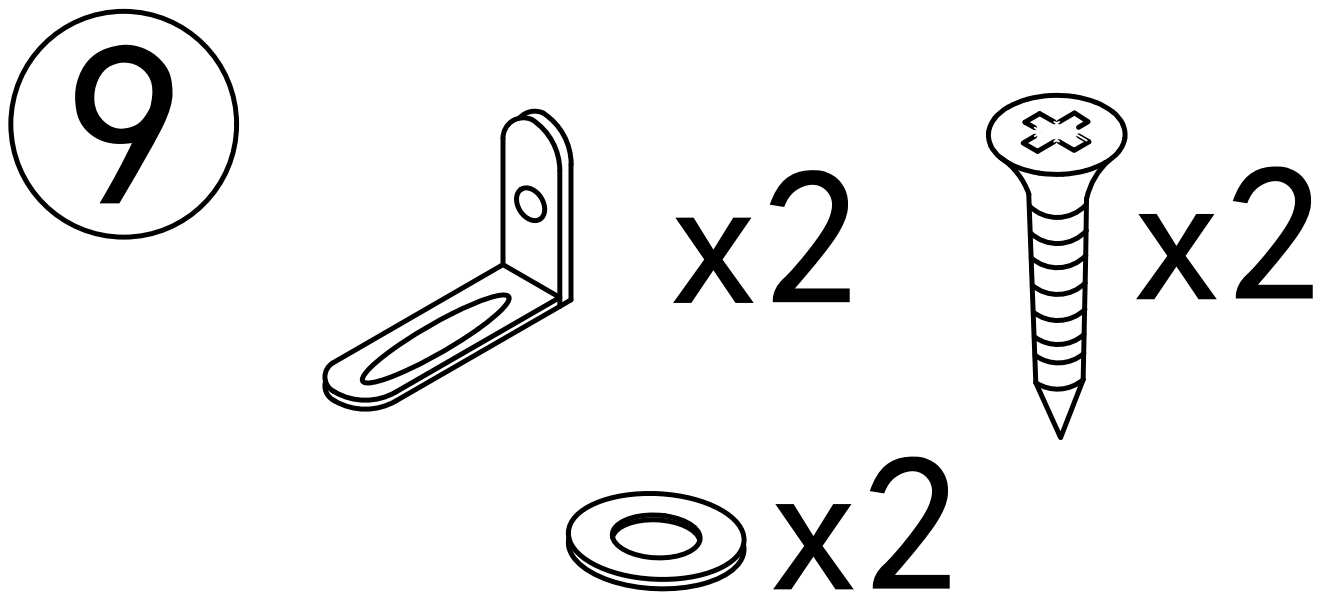

3.5x14mm

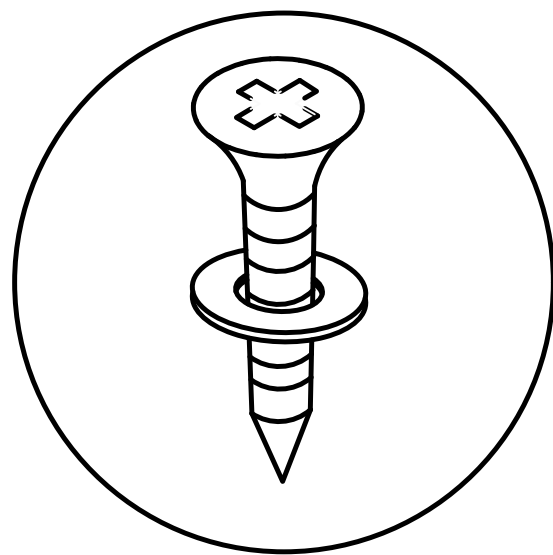

Install the anti fall hardware on the cabinet as shown in the picture first

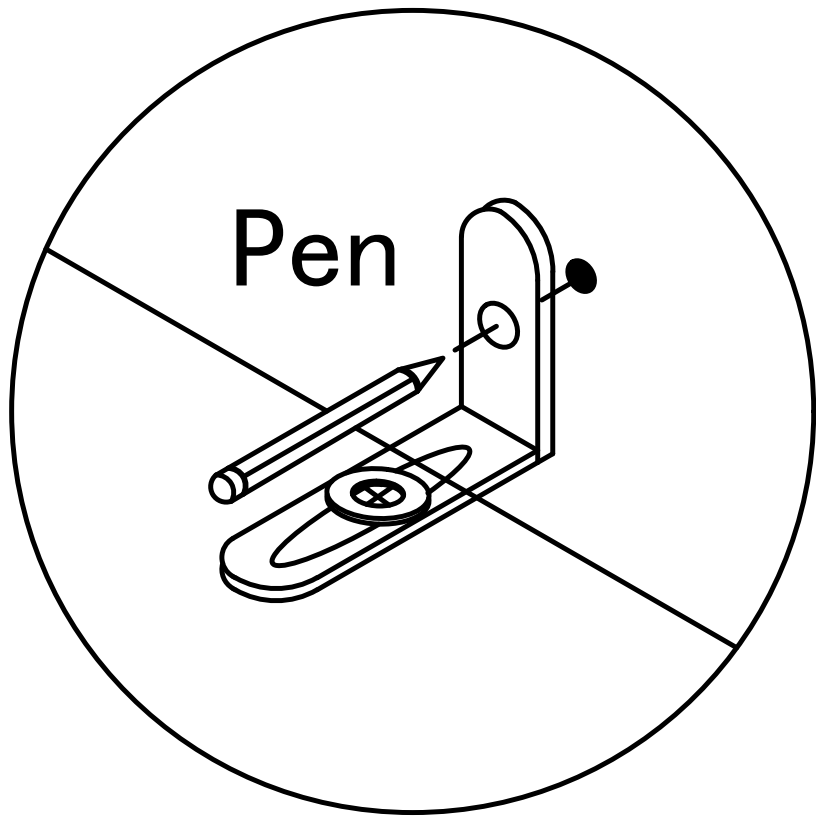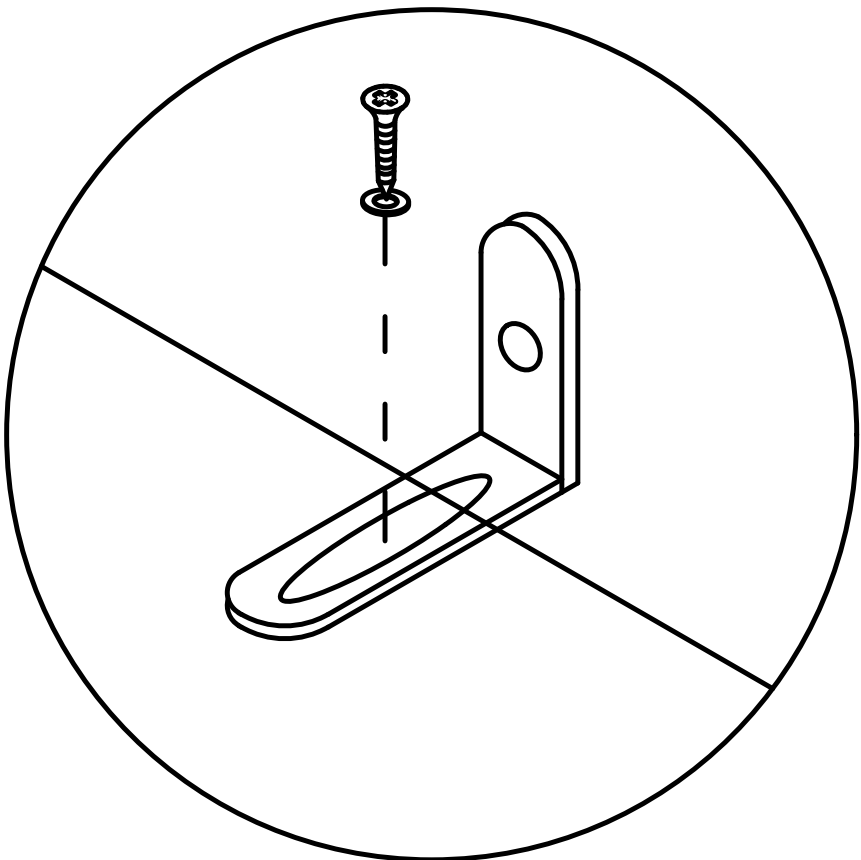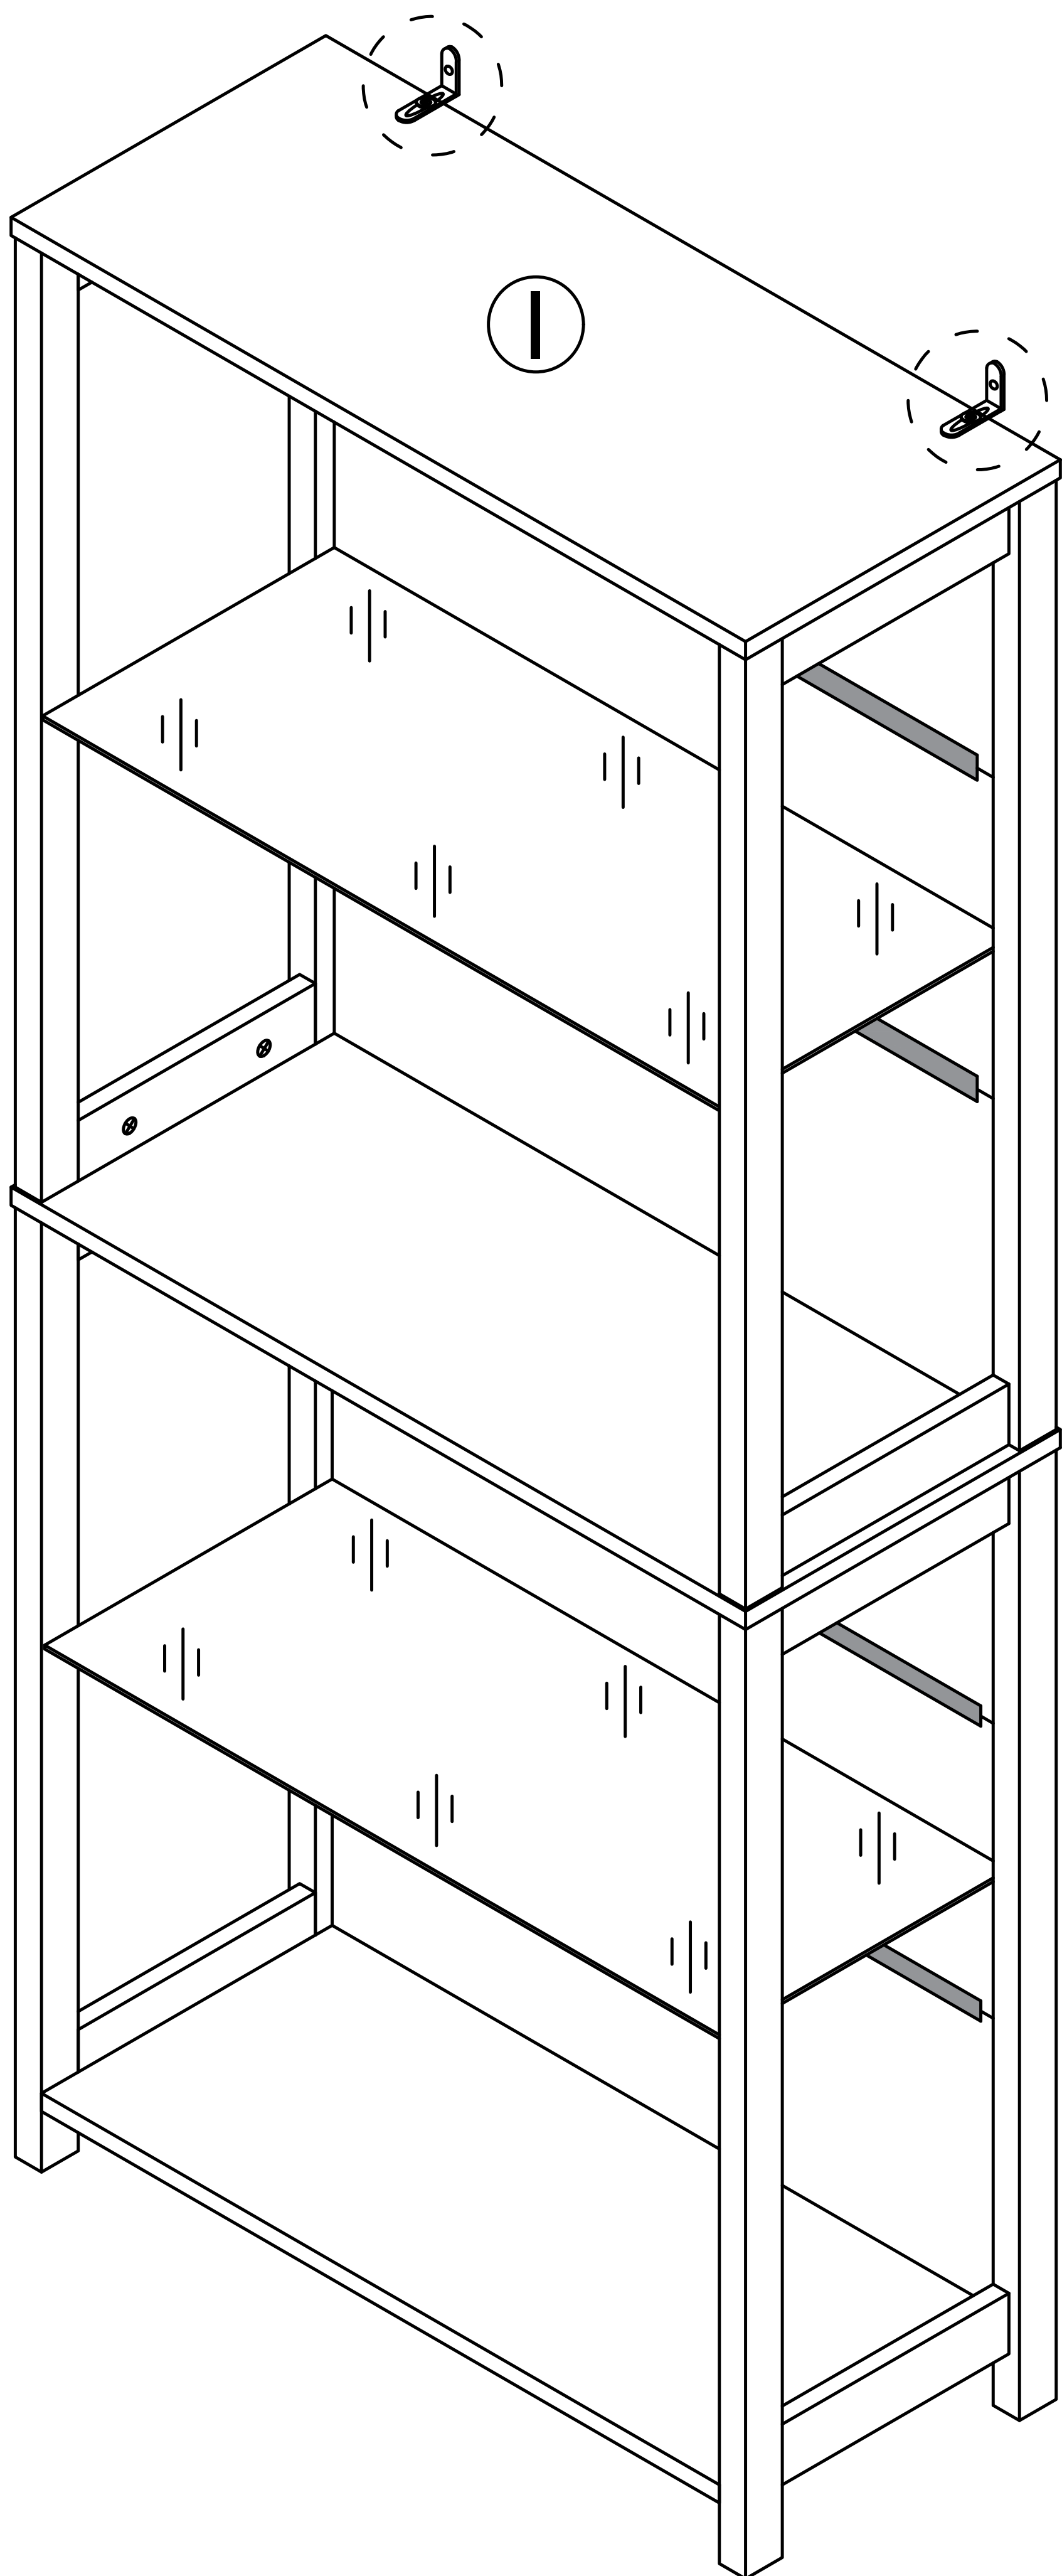

Then mark the wall with a pen through the holes in the anti-fall hardware

Step 25




9

x2




x2

x2

Wall Mount

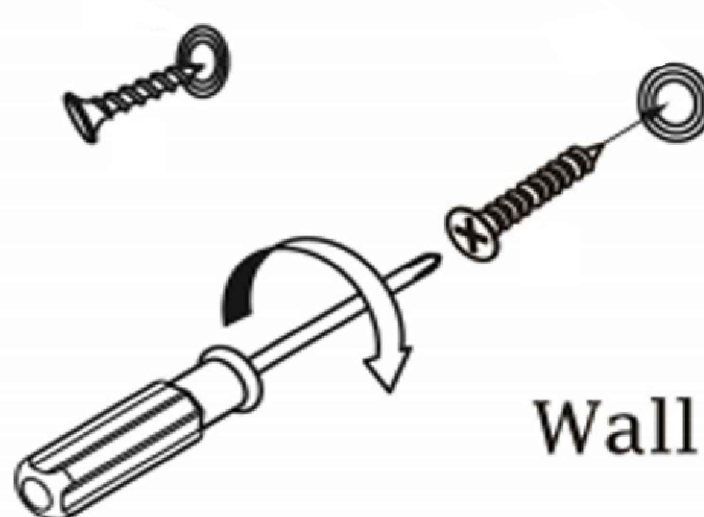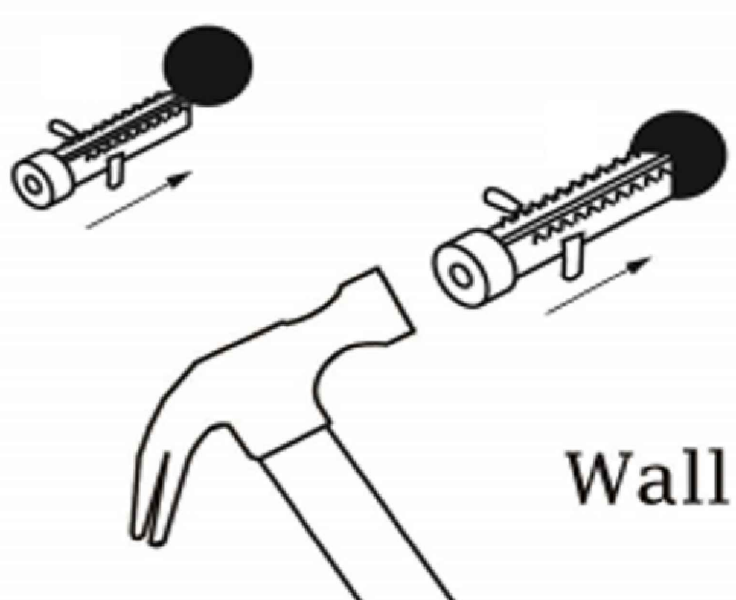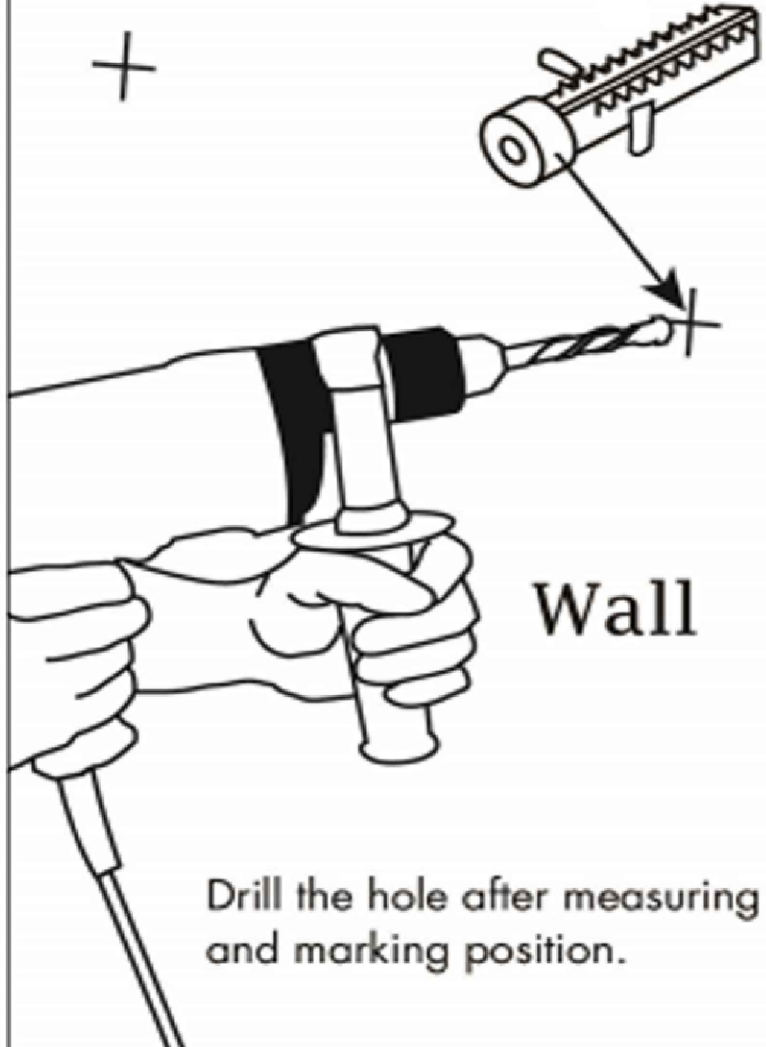

Drill the hole with an electric drill
and punch in the colloidal particles

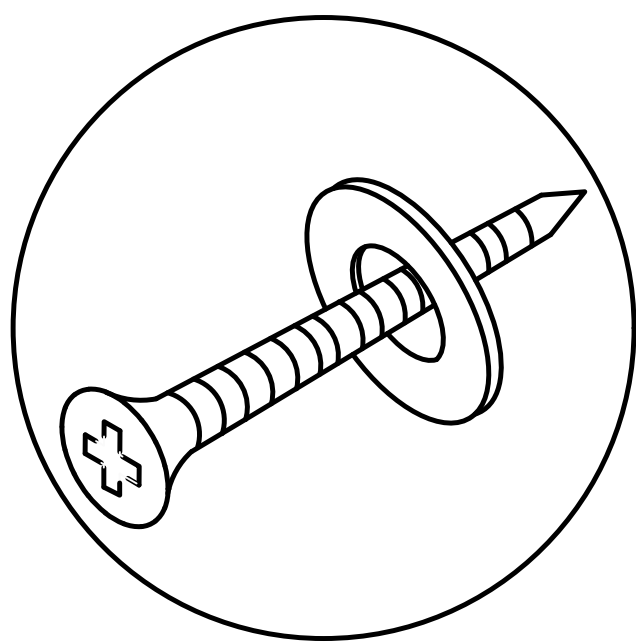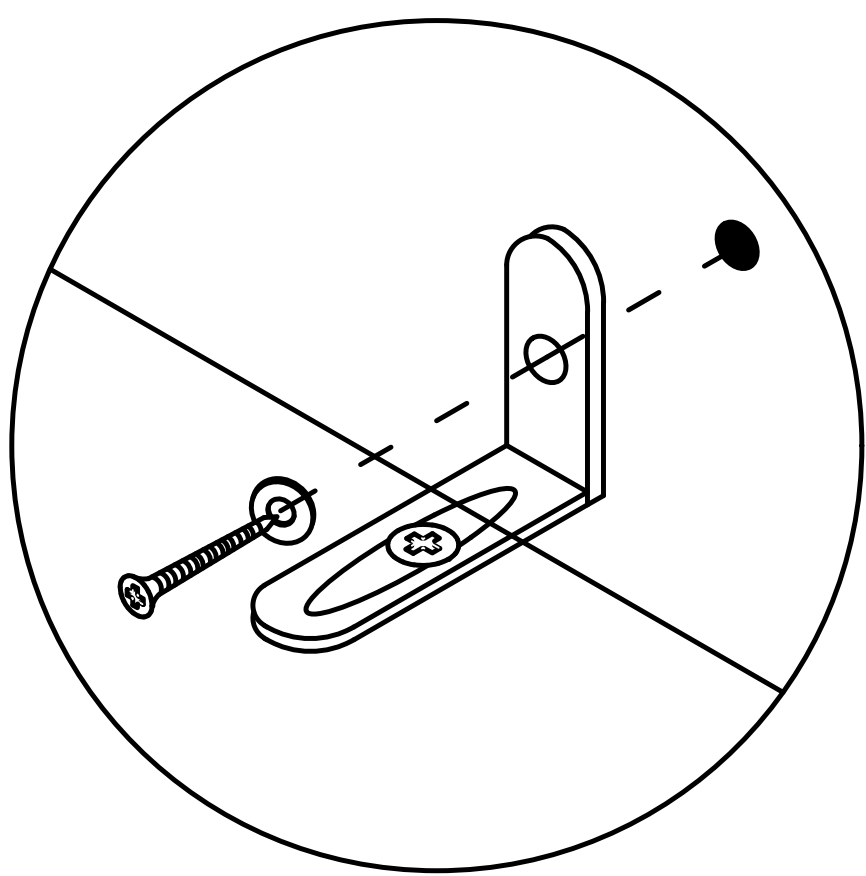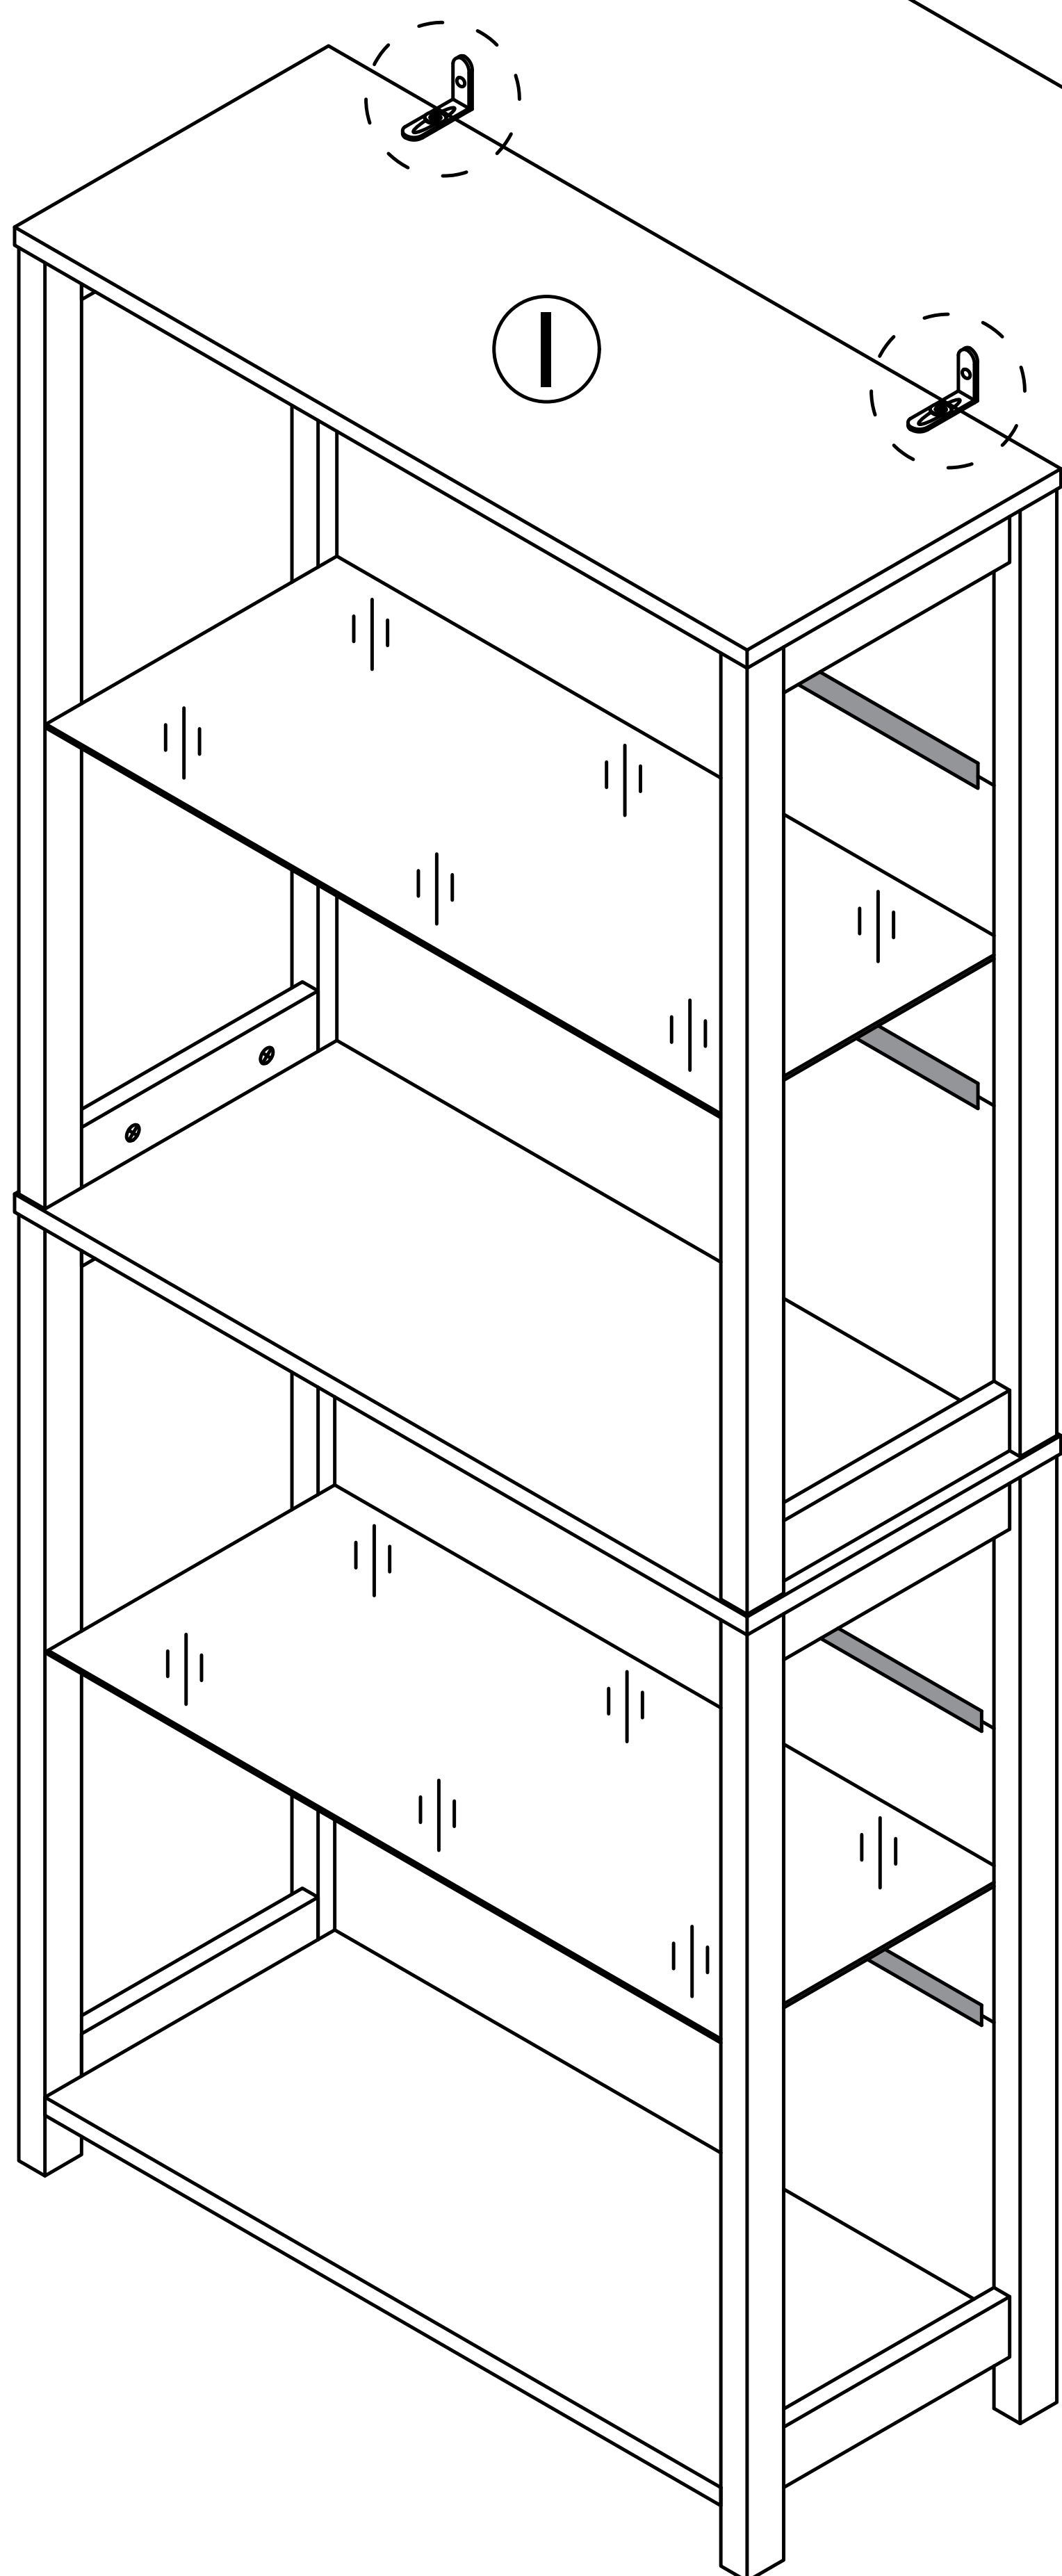

4x45mm

Fix the dressing
table to the wall


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

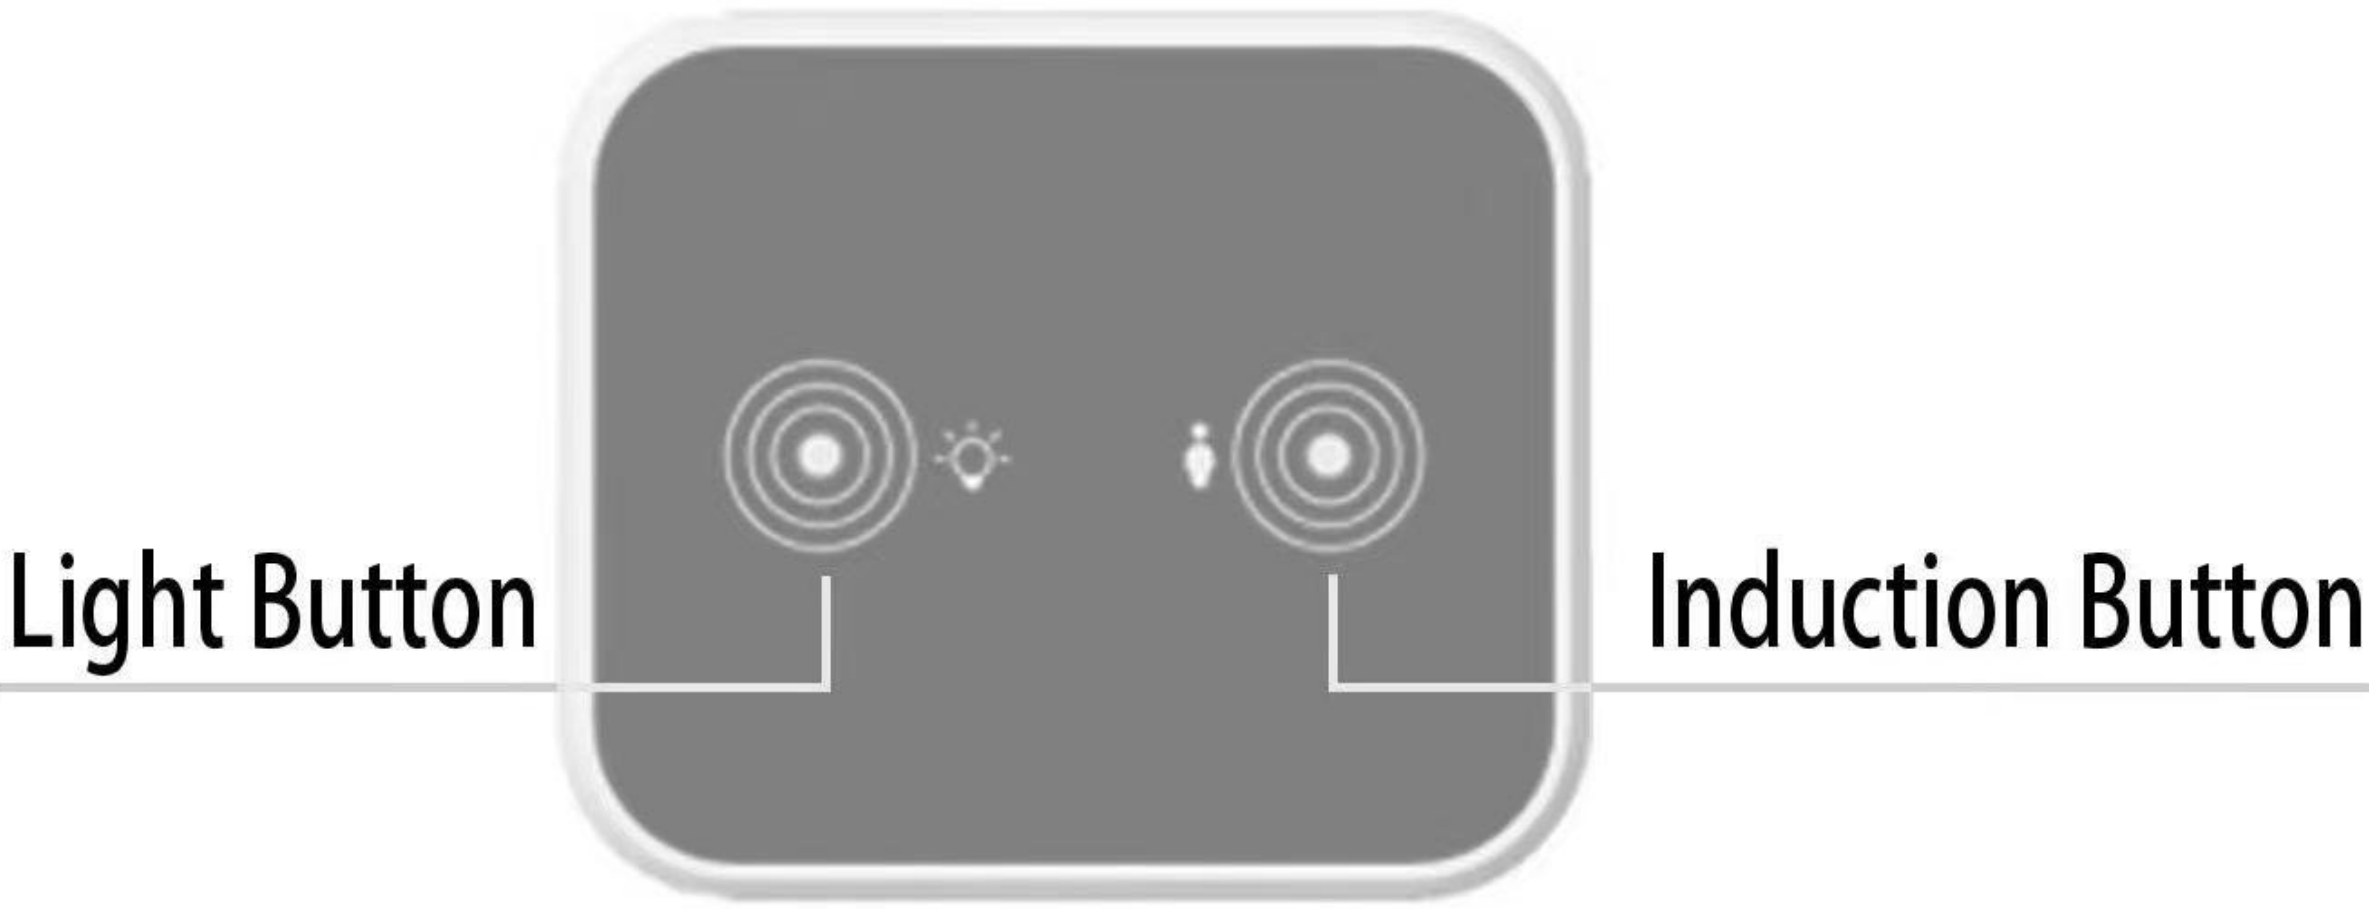

ATTENTION PLEASE

- 1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
- 2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

- A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.
- B. Long touch to turn off the induction function.
- C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.