



ASSEMBLY INSTRUCTION




A:Legs 4PCS

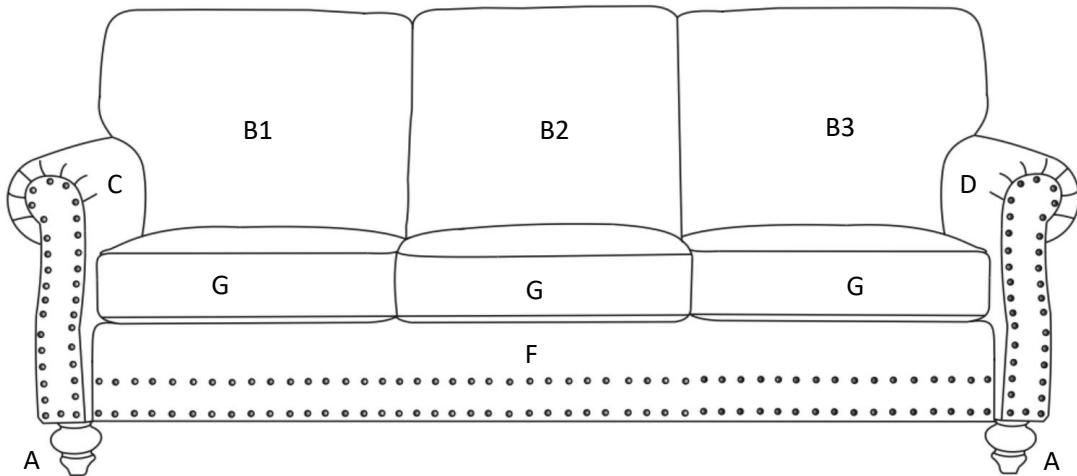


B1:Left back




B2:Middle back cushion 1PC




B3:Right back cushion 1PC




C:Left arm 1PC



D:Right arm 1PC



E:Back frame 1PC



F:Front board 1PC



G:Seat cushion 3PCS



H:Base support 1PC




K:Allen Key 1PC


The spare parts for C & D are put into the box 1/2.



The spare parts for A&B1/2/3&E&F&G&H&K are put into the box 2/2.

take out the parts C&D
from this box


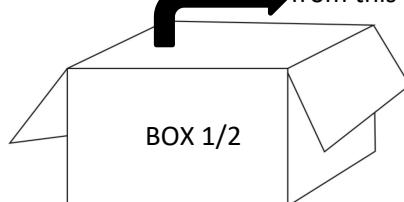


take out the parts
A&B1/2/3&E&F&G&H&
K from this box


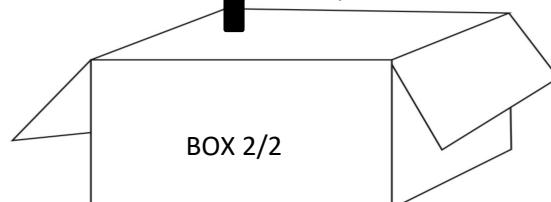


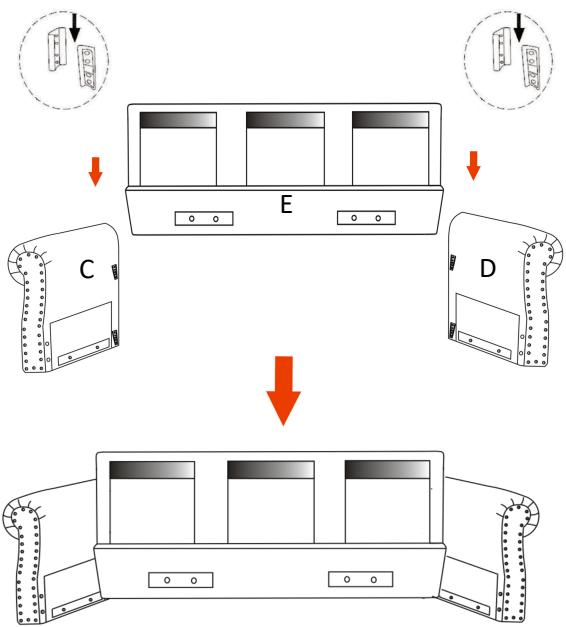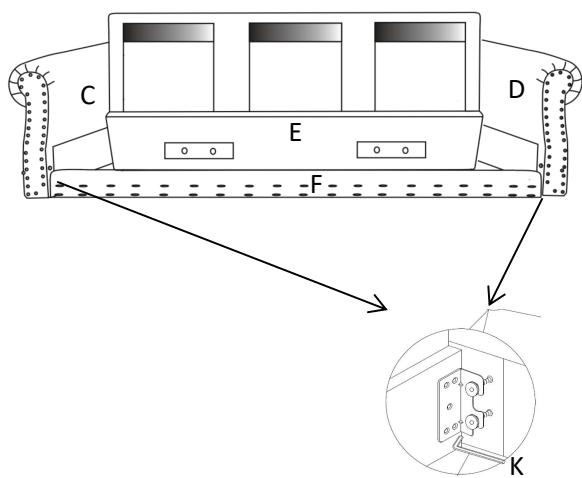STEP 1**STEP 2****STEP 3**



Turn the legs A clockwise to fixed it on the sofa.

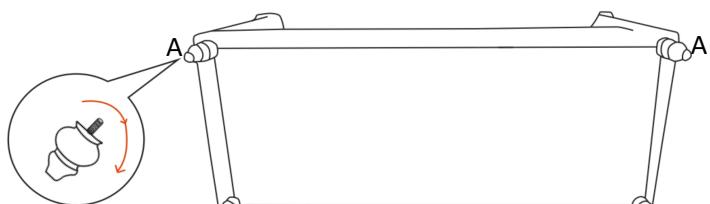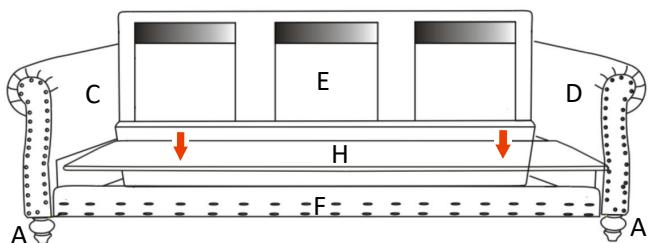**STEP 4**


Tear off the rag under the seat cushion and back cushion and then stick on the frame

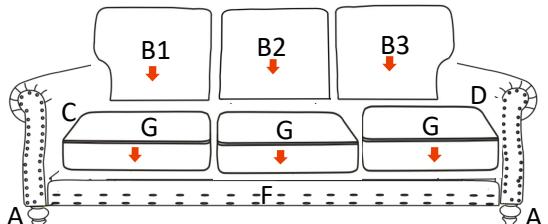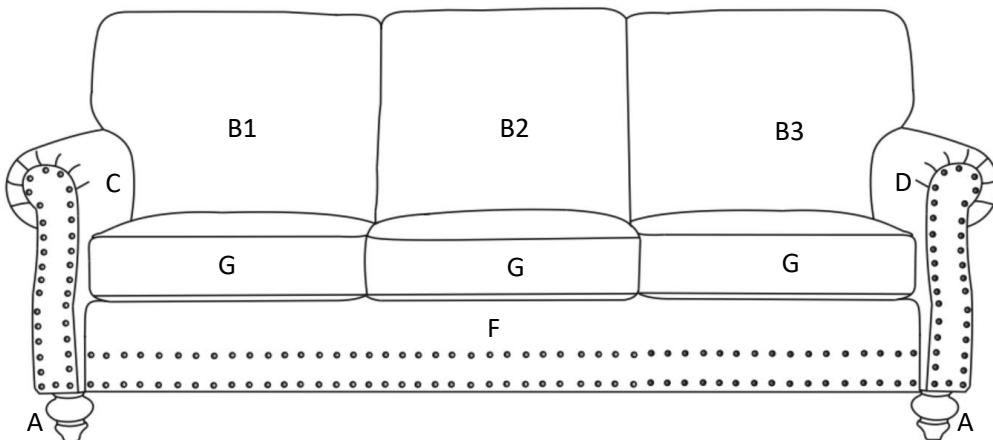**STEP 5**


ASSEMBLY INSTRUCTION

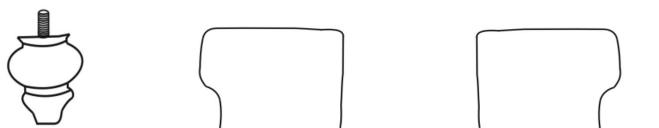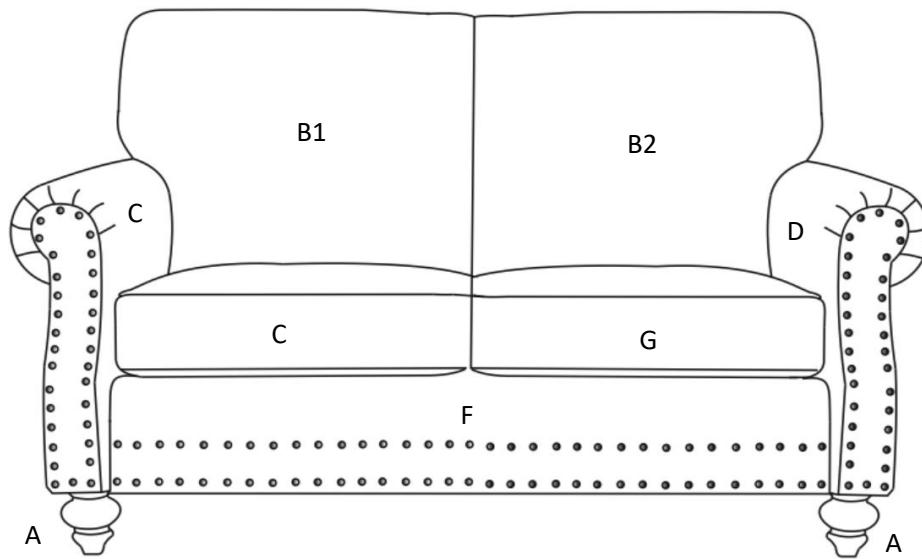

A:Legs 4PCS B1:Left back cushion B2:Right back cushion
1PC

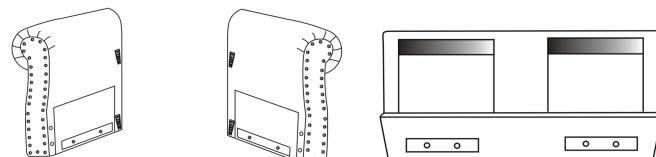

C:Left arm 1PC D:Right arm 1PC E:Back frame 1PC





F:Front board 1PC G:Seat cushion 2PC





H: Base support 1PC K:AlClen Key 1PC



The spare parts for C & D are put into the box 1/2.

The spare parts for A&B1/2/3&E&F&G&H&K are put into the box 2/2.

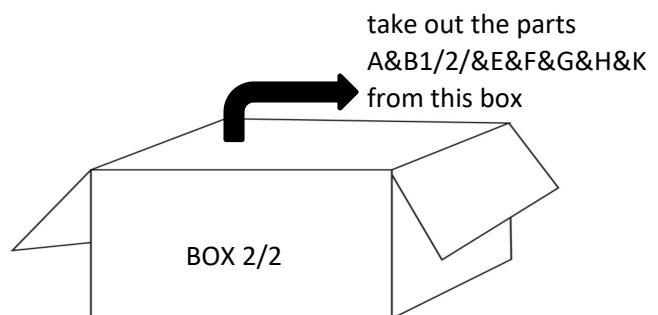
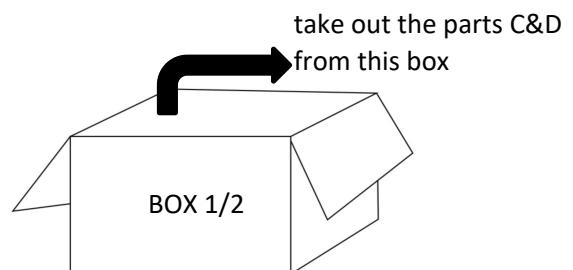


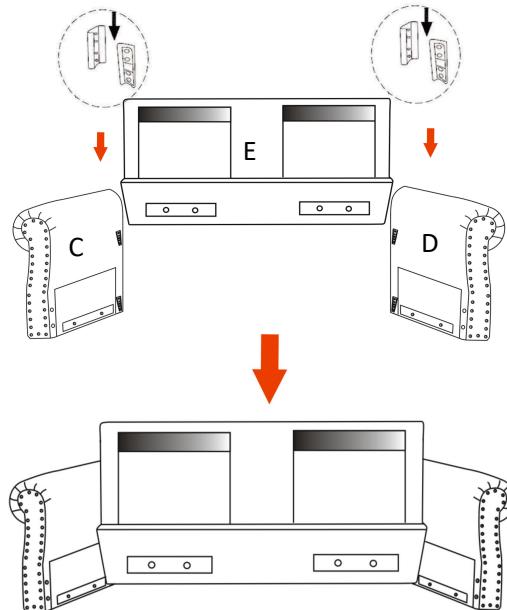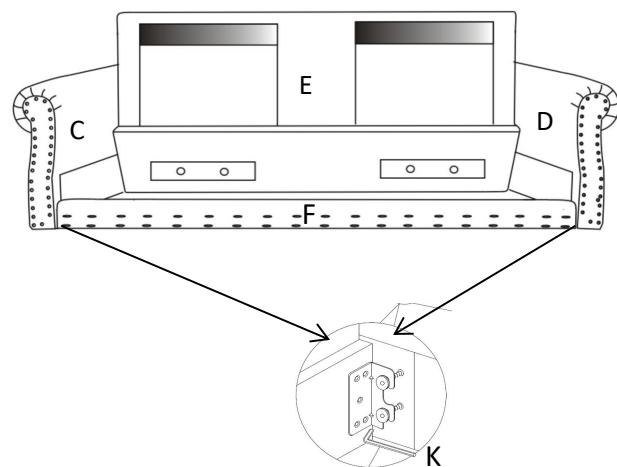STEP 1**STEP 2****STEP 3**


Turn the legs A clockwise to fixed it on the sofa.

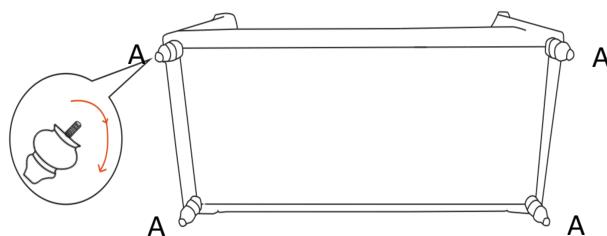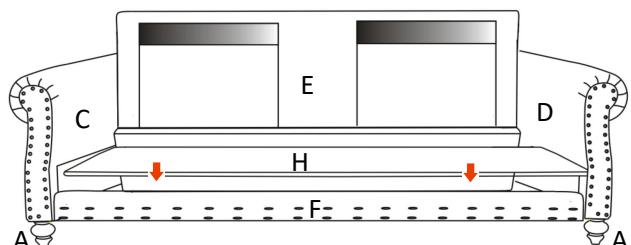**STEP 4**


Tear off the rag under the seat cushion and back cushion and then stick on the frame

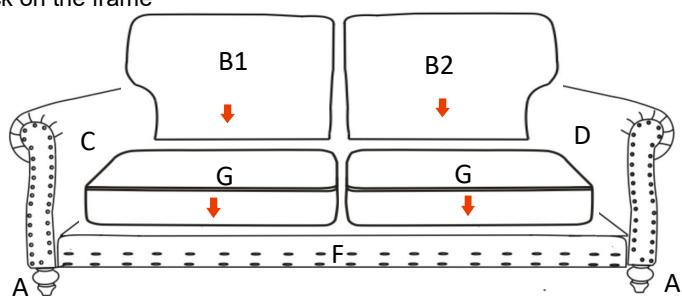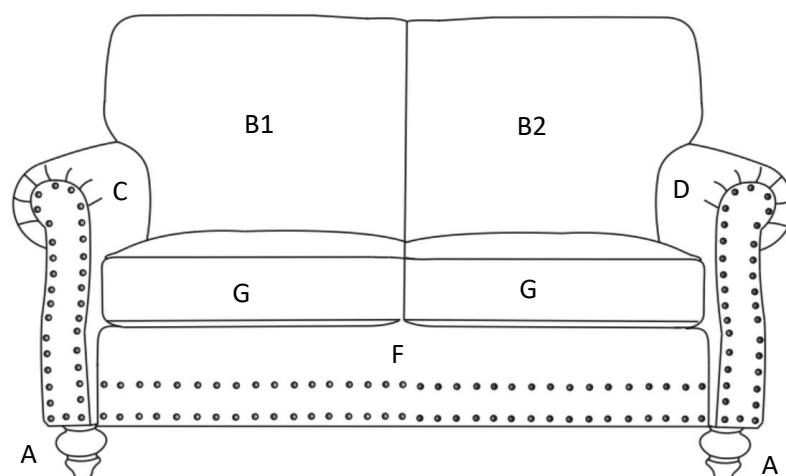**STEP 5**


ASSEMBLY INSTRUCTION

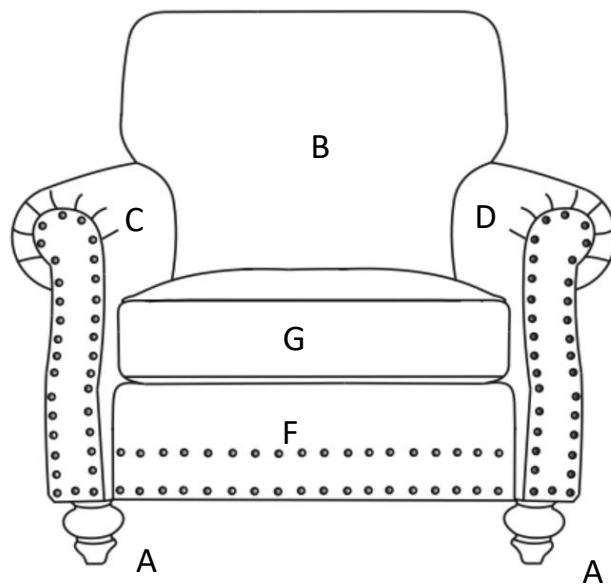


A:Legs 4PCS




B:back cushion 1PC



C:Left arm 1PC



D:Right arm 1PC




E:Back frame 1PC



F:Front board 1PC




G:Seat cushion 1PC





H: Base support 1PC





K:Allen Key 1PC

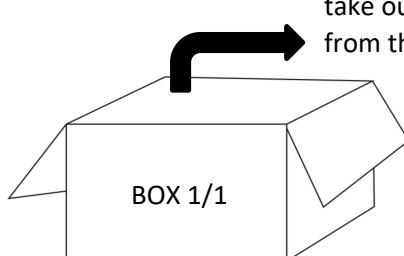


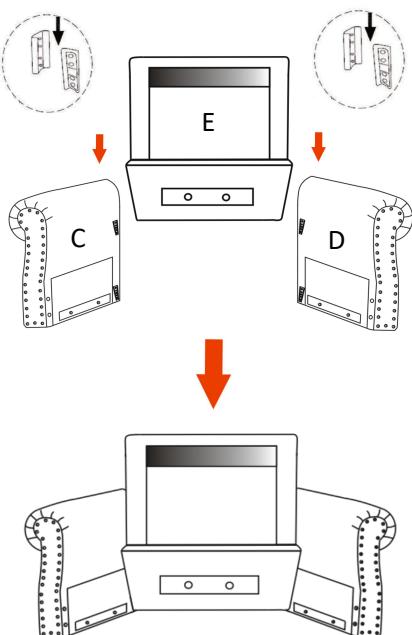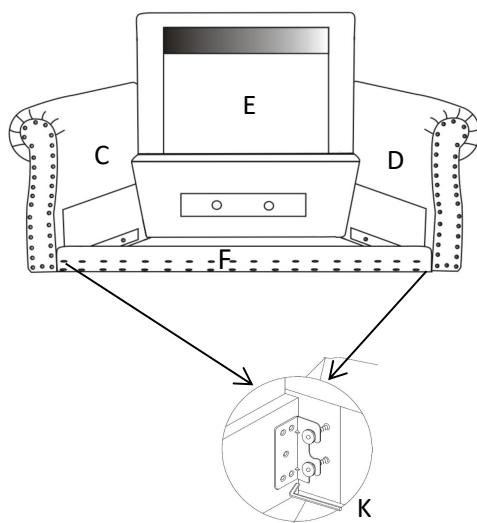STEP 1**STEP 2****STEP 3**

Turn the legs (A) clockwise to fixed it at the bottom of the both arm(C & D)

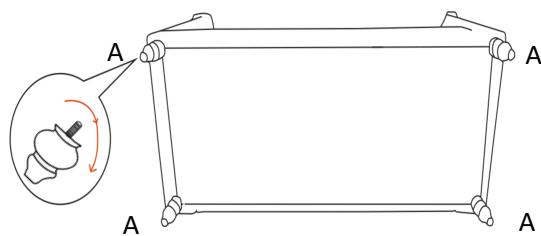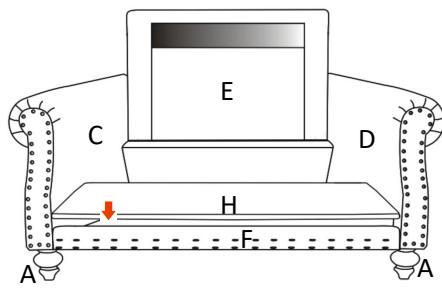**STEP 4**

Tear off the rag under the seat cushion(G) and back cushion(B) and then stick on the frame

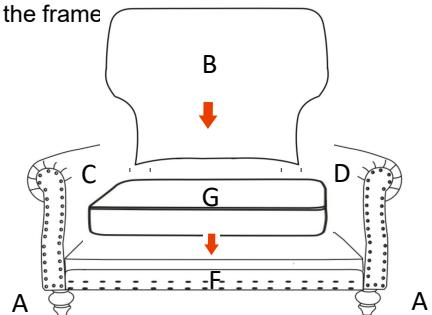**STEP 5**