

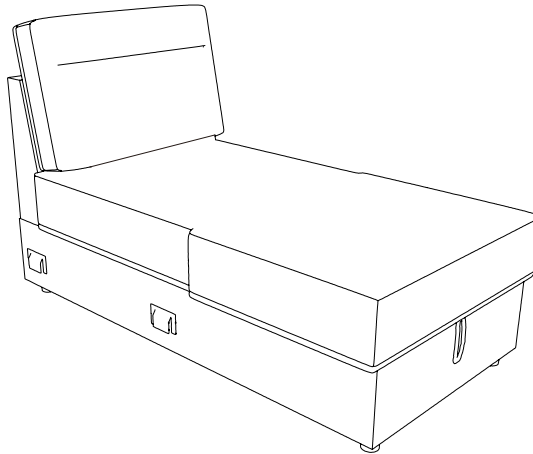




ASSEMBLY INSTRUCTION


ITEM NO.:D79391.92.95-CH-B






PARTS LIST



HARDWARE LIST

							
1	x4	5	x2				


1.Please open the seat frame before removing the parts for assembly.

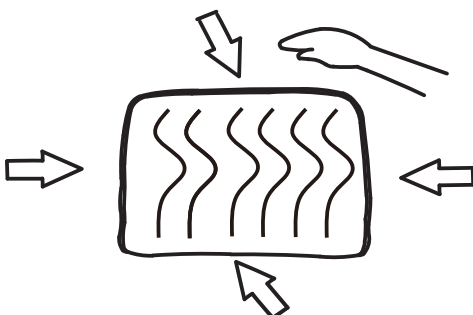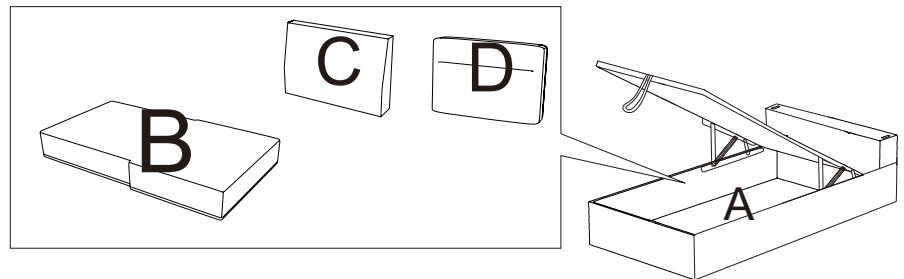

2.After removing the cushion from the compress bag, please allow air to flow through the cushion for few days. You can try to fluff cushion by push in and push out on all four sides of the cushion. Hitting the top/front of the cushion with your hand to fluff them after installation.




3.Please allow at least 72 hours for the cushions to recover to its natural state after removing from the package.

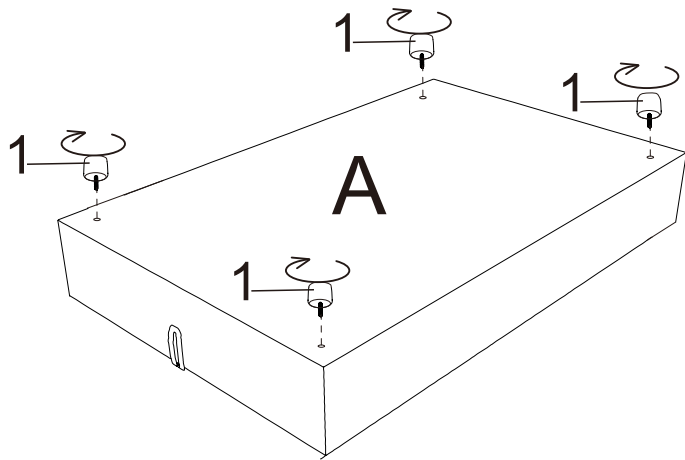


The diagram shows a 3D rectangular prism labeled 'C'. Two circular dashed lines provide detail views of the prism's ends. In each detail view, a vertical rectangular face is shown with an upward-pointing arrow and the number '5' next to it, indicating a specific measurement or feature.

wrong!

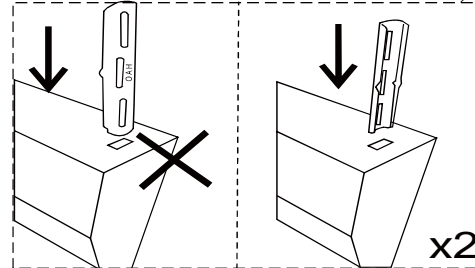

A diagram of a rectangular block with a dashed line indicating a cut along its length, labeled 'D'.

Please kindly remove the black cover tape from the velcro before you place the cushion on top.



Face the Velcro
upward.

IN THE BOX-LS

