


Cat Exercise Wheel

Laufрад für Katzen




Assembly Instructions

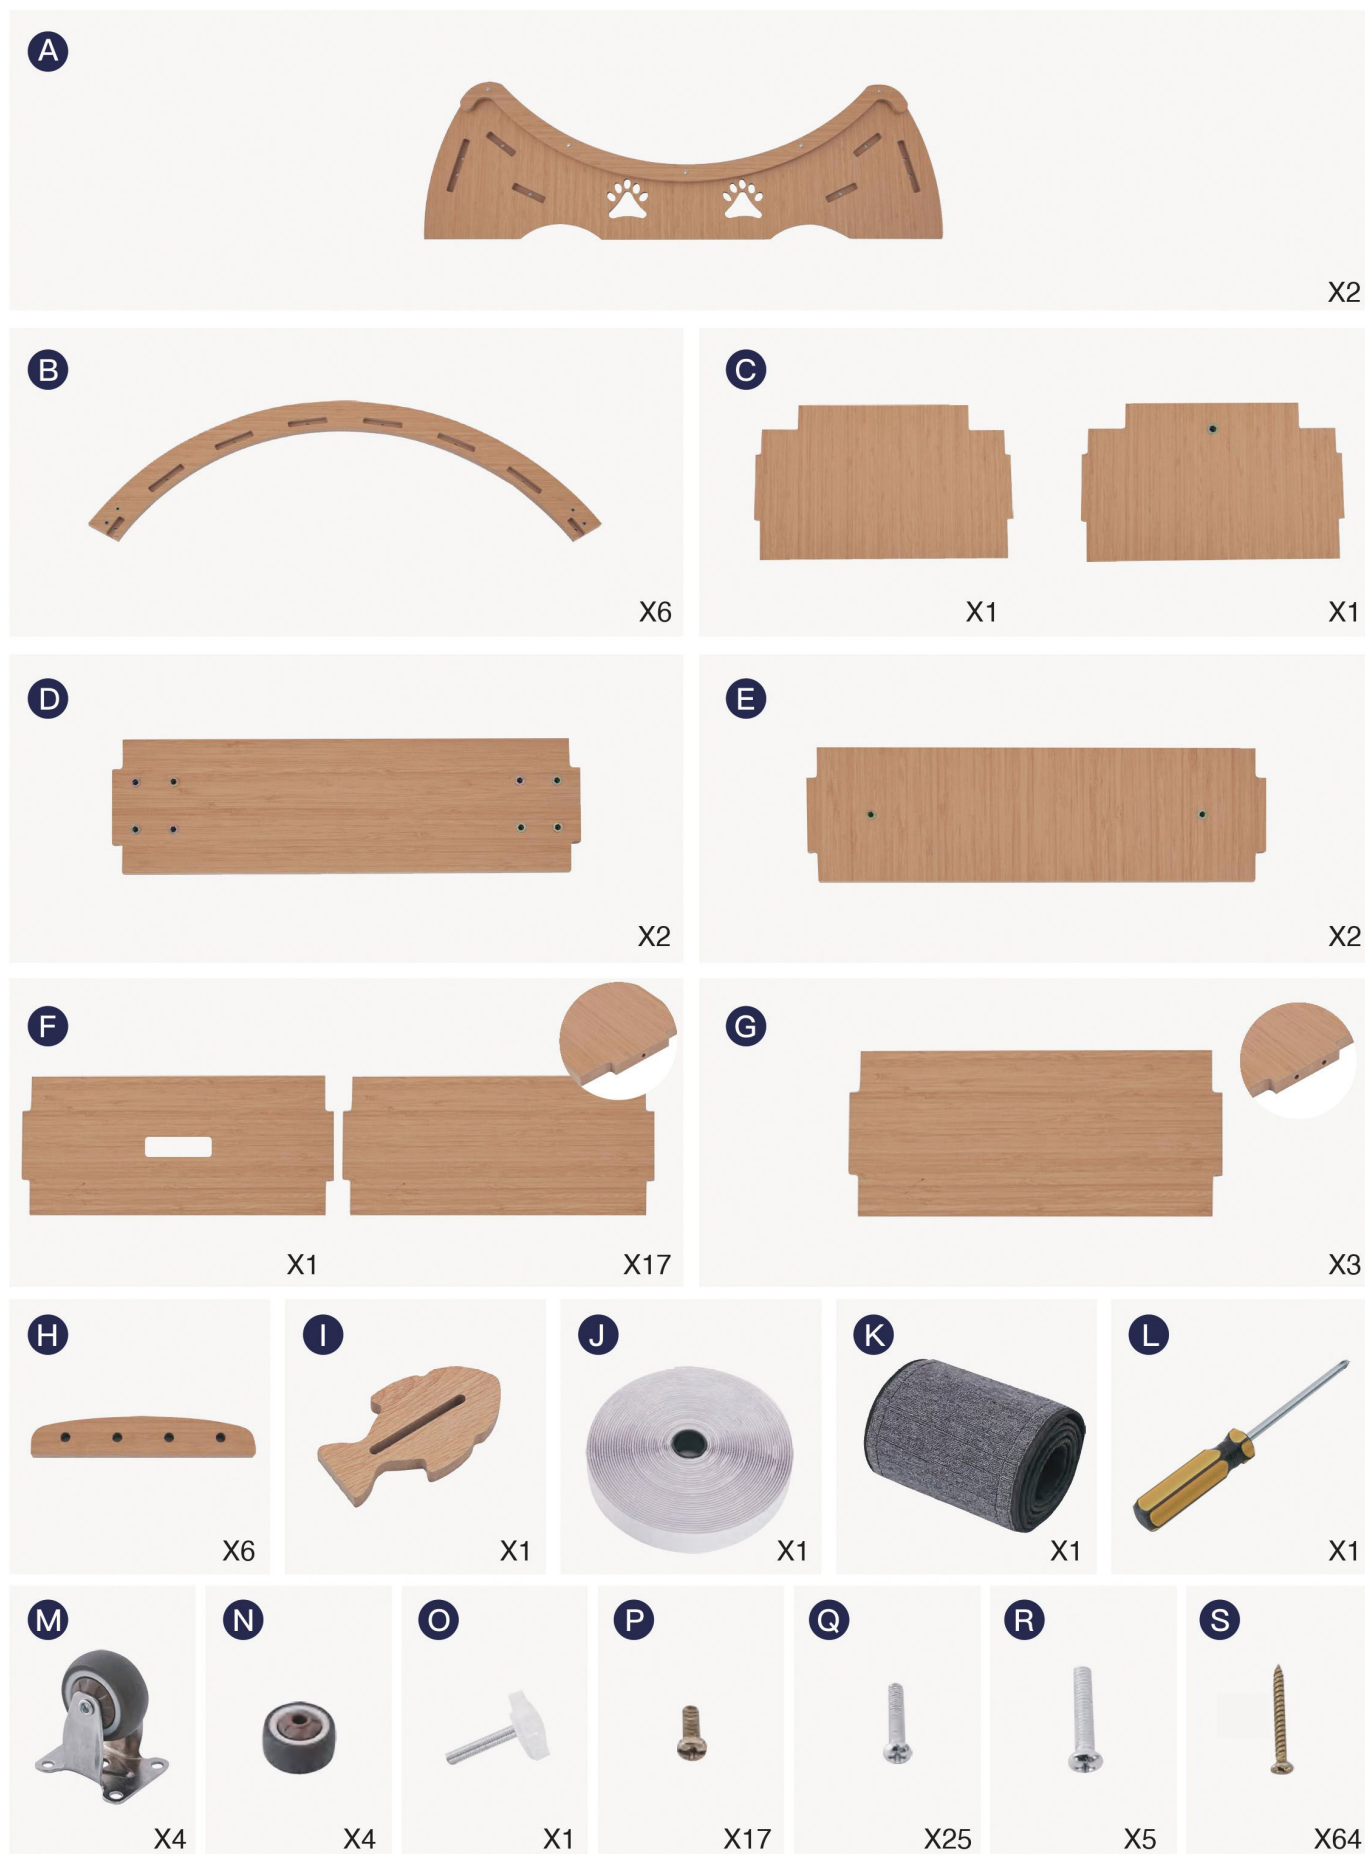


▲ To avoid the risk of suffocation, keep all parts and packaging out of reach of babies and children.


Steps for installing the base

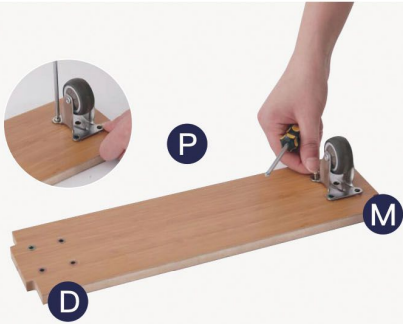

Fix the M wheel to the D board
(with the P screw)

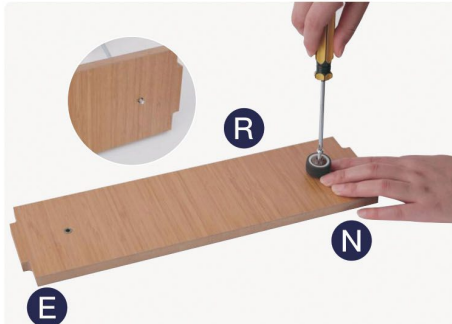

Fix the N-type latch to the E board with
the R screw (Tips: do not let the screw
protrude from the board).

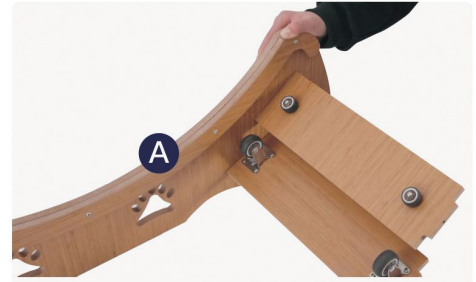

Insert the two assembled components
into the A base (Please pay attention to
the position of the wheel).




Fix the C board to the A board
(with the S screw)



Fix the component with another A board with the S screw.


Steps for installing the running wheel

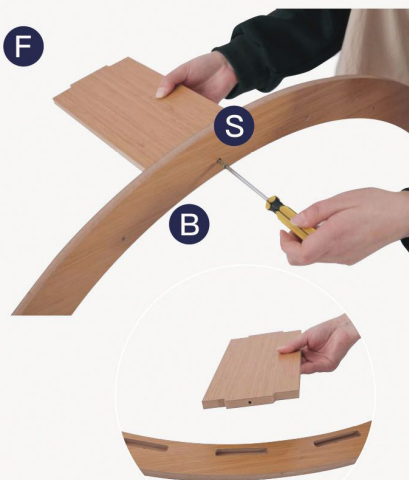

Fix the F board (single hole) to the B
board with the S screw.



Fix all F boards to the B board.

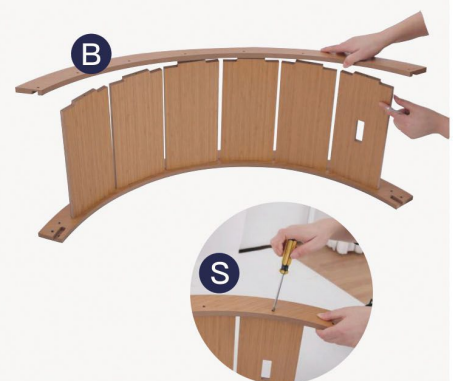


Fix on the accessory with the B board
already installed.




Take out the G board (with 2 holes)



Place the G board between the two accessories.

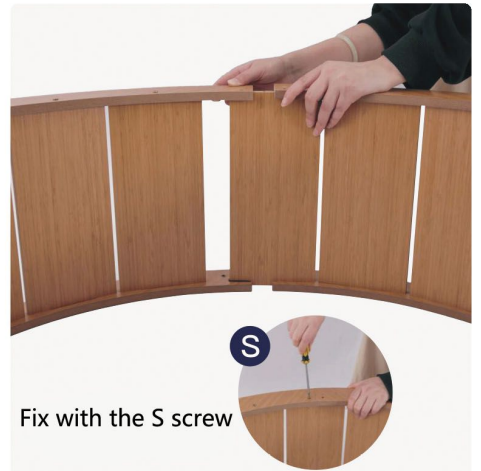

Fix with the S screw

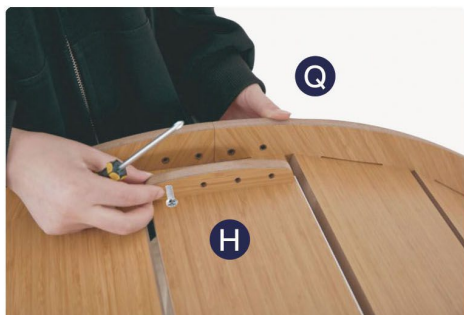

Take out the H connecting plate and fix it with the Q nut.



Stick the J tape on both ends of the inner side of the running wheel.



Attach the K grip pad with velcro.



Place the running wheel on the base.




Fix the shelf to the base with the O nut.




Installation is complete.

Montageanleitung

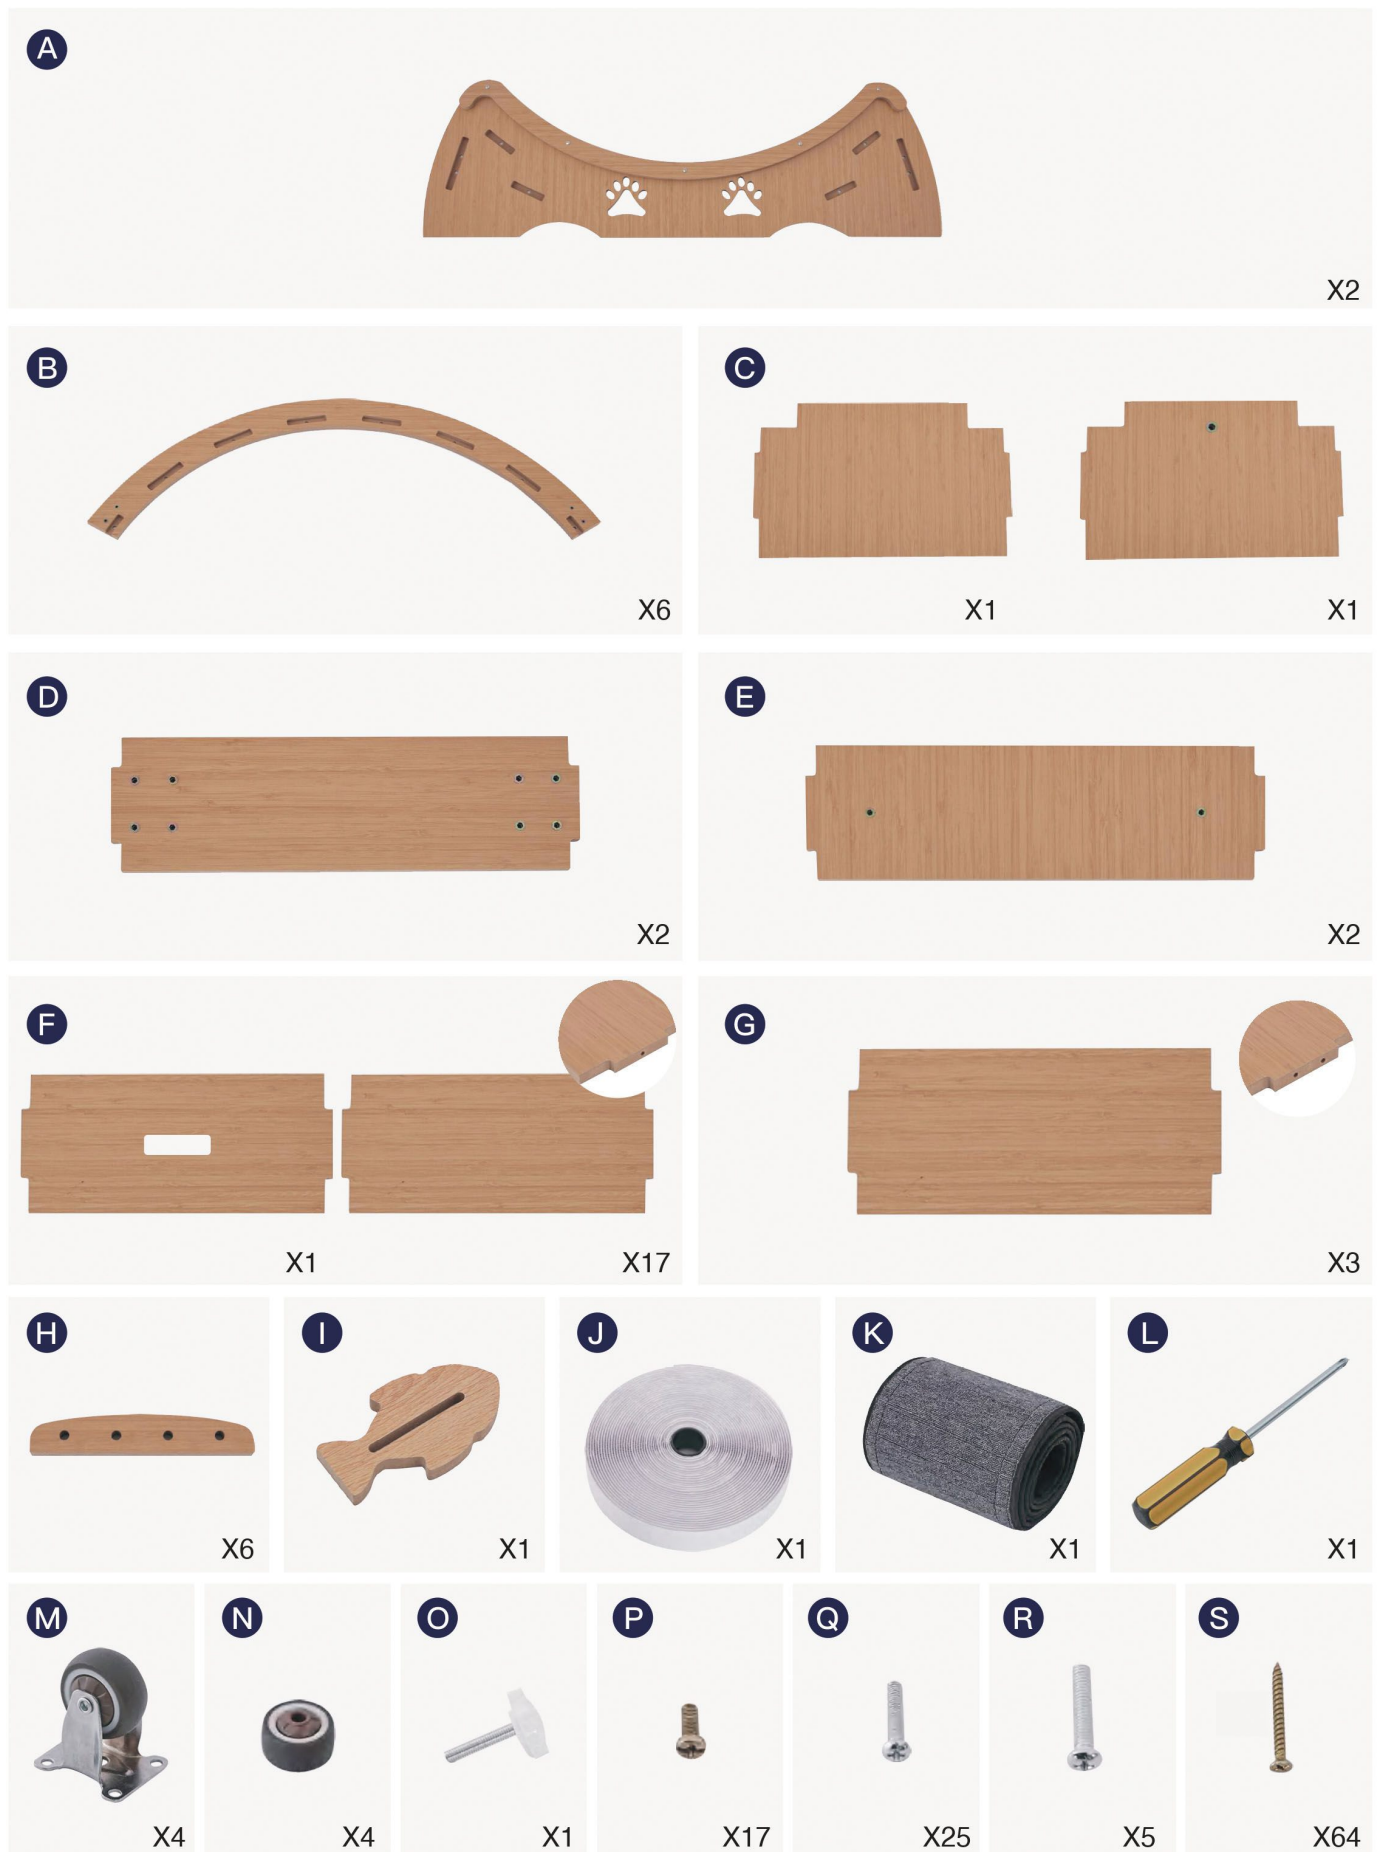


▲ Um Erstickungsgefahr zu vermeiden, bewahren Sie alle Teile und die Verpackung außerhalb der Reichweite von Babys und Kindern auf.


Schritte zur Installation der Basis

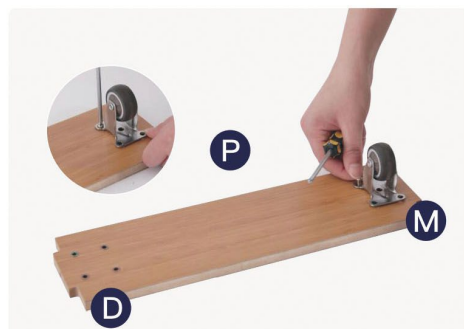

Befestigen Sie das M-Rad an der D-Platine (mit der P-Schraube).

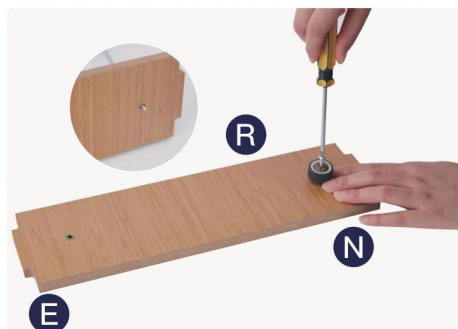

Befestigen Sie den Riegel vom Typ N mit der Schraube R an der Platine E (Hinweis: Achten Sie darauf, dass die Schraube nicht aus der Platine herausragt).

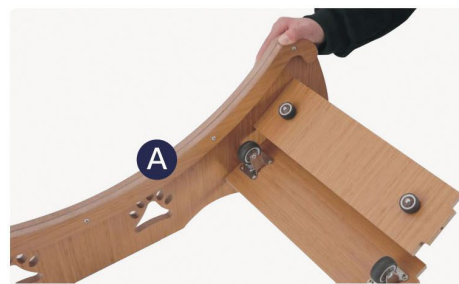

Die beiden zusammengebauten Bauteile in die A-Basis einsetzen (Bitte auf die Position des Rades achten).




Befestigen Sie die C-Platine an der A-Platine (mit der S-Schraube).




Befestigen Sie das Bauteil mit einer weiteren A-Platine mit der S-Schraube.


Schritte zur Montage des Laufrades

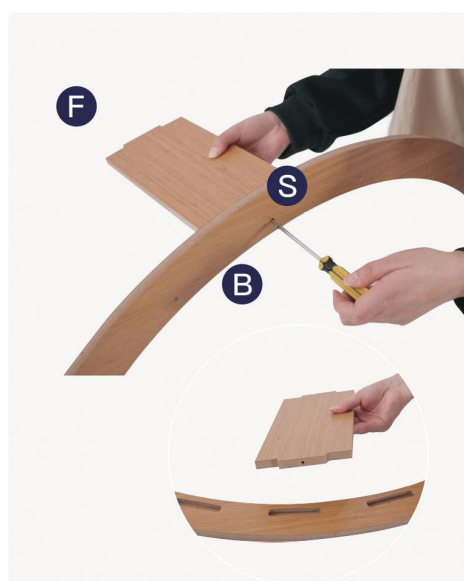


Befestigen Sie die F-Platte (Einzelloch) mit der S-Schraube an der B-Platte.

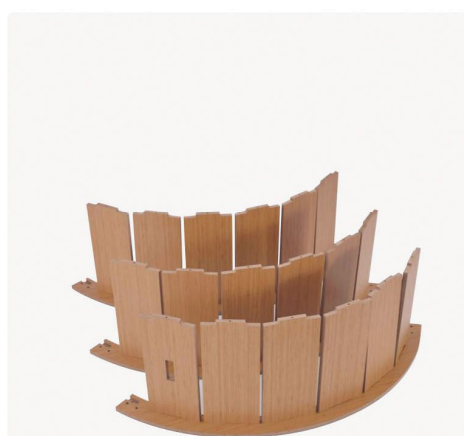

Befestigen Sie alle F-Platten an der B-Platte.

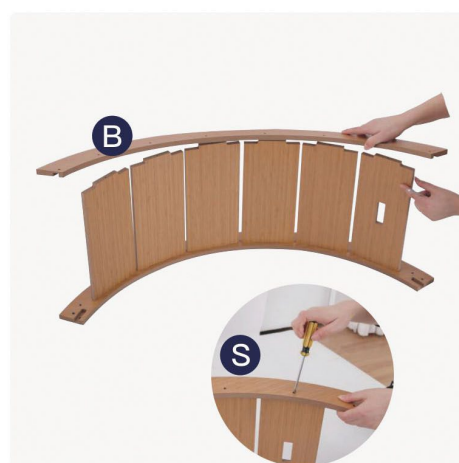


Befestigen Sie das Zubehör mit der bereits installierten B-Platine.

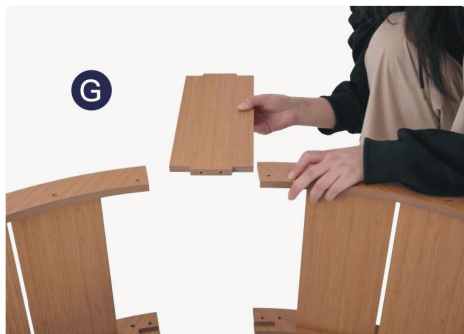


G-Platine (mit 2 Löchern) herausnehmen



Platzieren Sie die G-Platine zwischen den beiden Zubehörteilen.

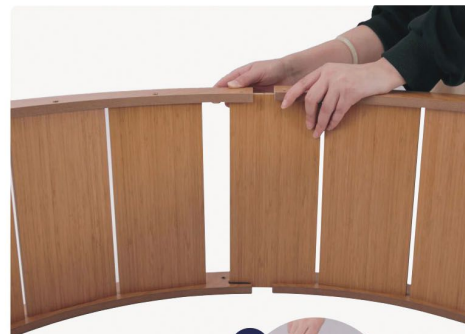

Mit der S-Schraube befestigen

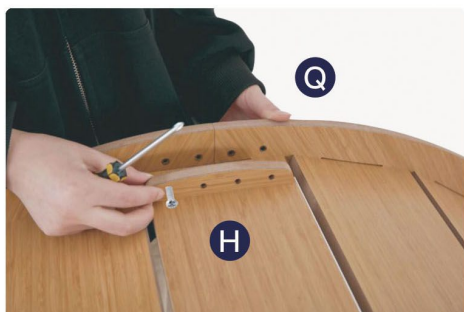

Nehmen Sie die H-Verbindungsplatte heraus und befestigen Sie sie mit der Q-Mutter.



Kleben Sie das J-Tape an beiden Enden auf die Innenseite des Laufrades.



Befestigen Sie das K-Griffpolster mit Klettverschluss.



Legen Sie das Laufrad auf die Basis.



Befestigen Sie das Regal mit der O-Mutter an der Basis.



Die Installation ist abgeschlossen.