

STERLING®

A KOHLER COMPANY

RIVERTON™

HET-HIGH EFFICIENCY TOILET

402083

ALSO 402084

CSA B651

OBC



Features

- Vitreous china
- One flush cleansing performance
- 5-year limited warranty
- Three-bolt, quick-connect installation system
- Standard round or elongated seat - not supplied
- 12" (305 mm) rough-in
- 1.28 gpf (4.8 lpf)
- Sterling Pro Force® HET Flushing Technology
- Insulated tank liner [402083-U, 402084-U]
- Large 8" (203 mm) x 9" (229 mm) water surface and full 2" (51 mm) trapway
- 27-1/4" (692 mm) x 18-1/8" (460 mm) x 29" (737 mm) [402083, 402083-U]
- 29-1/4" (743 mm) x 18-1/8" (460 mm) x 29" (737 mm) [402084, 402084-U]



Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1
- EPA WaterSense®

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Included tank	Included bowl	Colors/Finishes	
402083	HET-High Efficiency Toilet – round-front bowl (shown)	404552	403015	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
402083-U	HET-High Efficiency Toilet – round-front bowl with insulated tank liner	404552-U	403015	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
402084	HET-High Efficiency Toilet – elongated bowl	404552	403215	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
402084-U	HET-High Efficiency Toilet – elongated bowl with insulated tank liner	404552-U	403215	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Note: "U" represents models with insulated tank liner.

Technical Information

Fixture:	
Configuration	two-piece
Water per full flush	1.28 gal (4.8 L)
Passageway	2" (51 mm)
Water area	8" (203 mm) x 9" (229 mm)
Seat post hole centers	5-1/2" (140 mm)


Included components:	
Tank lid	84624
Trip lever	84625
Bolt cap accessory pack	1013092

Installation Notes

One flush cleansing of the bowl per ASME A112.19.2/CSA B45.1 and Dual Force® toilets per ASME A112.19.14-2006 performance requirements, when installed and operated per instructions packed with the product.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** when installed per Clause 3.8.3.8 and 3.8.3.9.

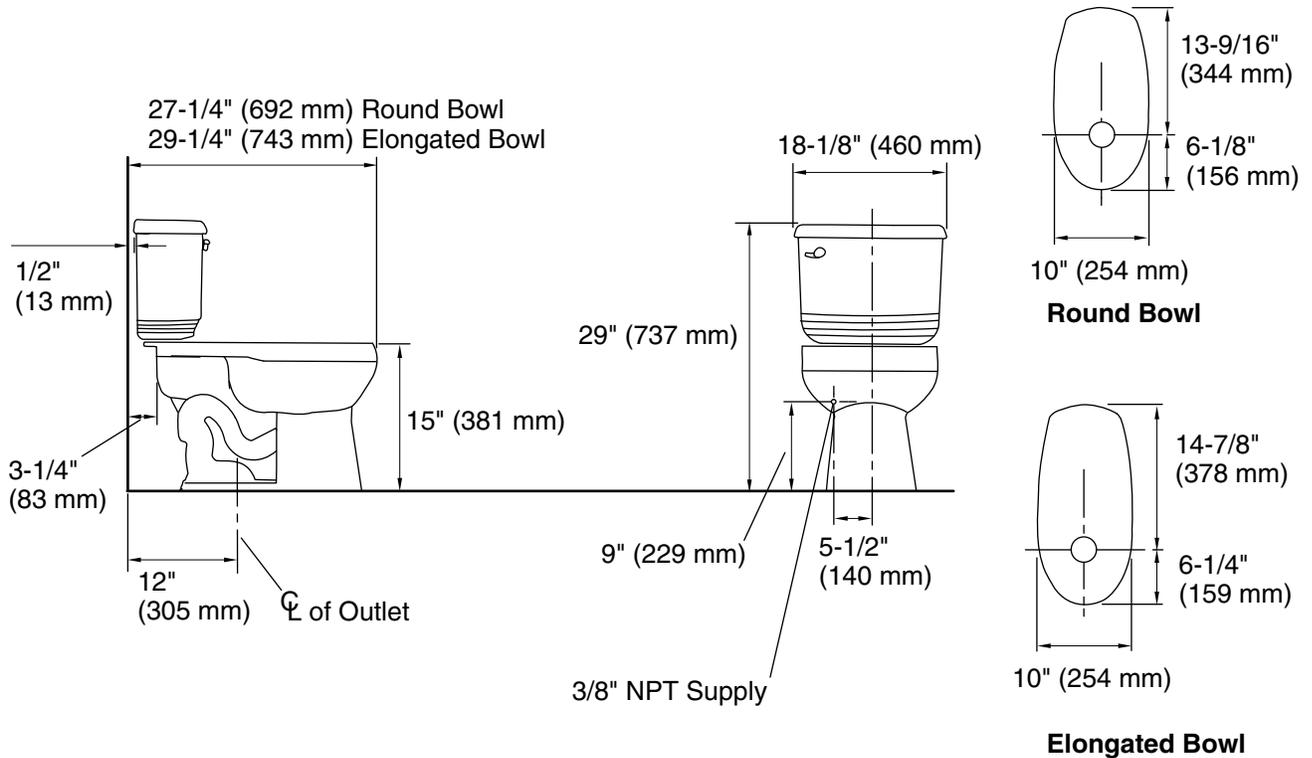

Product Diagram