


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.
4. Min. 90°C supply conductors. consult a qualified electrician to ensure correct branch circuit conductor.

2-LIGHT FLUSH MOUNT

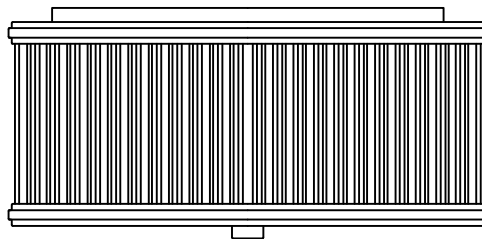

TOOLS REQUIRED




Flathead
Screwdriver



Phillips
Screwdriver



Ladder




Wire Strippers



Pliers



Electrical
Tape



Wire Cutters



Safety Glasses

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.


PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY
A	Wire nut	3
B	Single cross bar	1
C	Green ground screw	1
D	Outlet box screw	2
E	Lamp body	1
F	Ball nut	2

PIECE	DESCRIPTION	QUANTITY
G	Pipe	1
H	Glass tube	66
H1	Glass plate	1
I	Hex nut	1
J	Gasket	1
J1	Round plate	1
K	Finial	1

INSTALLATION

1. Attach the single cross bar (B) to the Junction Box with outlet box screw (D) then fix it.
2. Put the glass tube (H) into the hole of the lamp body (E).
3. Attach the supply circuit ground wire (green or bare copper wire) to the fixture ground wire, black to (black) and white to (white).
4. Raise the lamp body (E) thread to the single cross bar (B), secure with ball nut (F), then attach the pipe (G) to the bottom coupling of the lamp body (E), by turn it clockwise until tight; finally install the light bulbs to the socket. (BULBS NOT INCLUDED)
5. Attach the glass plate (H), gasket (J) and round plate (J1) to the Pipe (G), then lock it with hex nut (I), finally attach the finial (K).

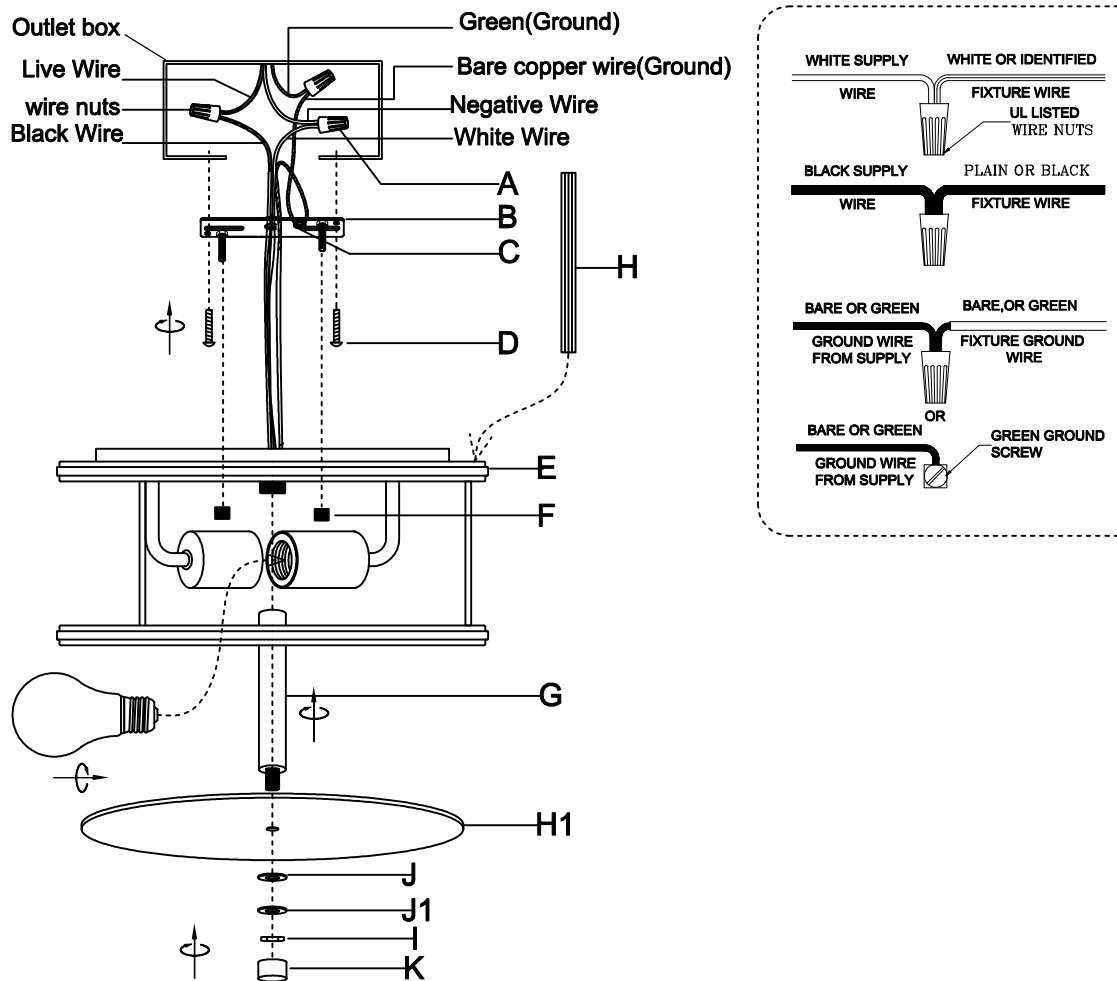

If you have any questions, please contact us, our warmest customer service will assist you within 24 hours.