



Installation Instruction

Before installation, please carefully read these installation instructions, Keep them handy for future reference and warranty purposes.

Before beginning

I WARNING AND SAFETY INSTRUCTIONS

- Please read these instructions carefully to familiarize yourself with the required tools, materials, and installation sequences. Follow the sections that pertain to your particular installation. This will help you avoid costly mistakes. In addition to proper installation, read all operating and safety instructions.
- All information in these instructions is based upon the latest product information available at the time of publication. Reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.
- These instructions contain important care, cleaning, and warranty information, which consumers can leave behind.
- Before installation carefully inspect the new fixture for any signs of damage.
- Assembly by two or more adults is highly recommended.
- To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.
- Ensure that the fixing location is able to take the weight of the complete fitting. (solid stone/brick walls).

2. Pre-assembly:

- Before installation, please check if the product is damaged or if any parts are missing.
- Keep the voltages between 100V and 120V. If the voltage exceeds 240V, please use transformer.
- You can connect the wires directly to your junction box or the plug.



WARNING: Risk of electrical shock.

All electrical connections should be completed by a licensed electrician.



WARNING: Risk of electrical shock.


Connect only to a circuit protected by a typical two-pole circuit breaker.




WARNING: Risk of electrical shock.

Disconnect power before servicing.

TOOLS REQUIRED

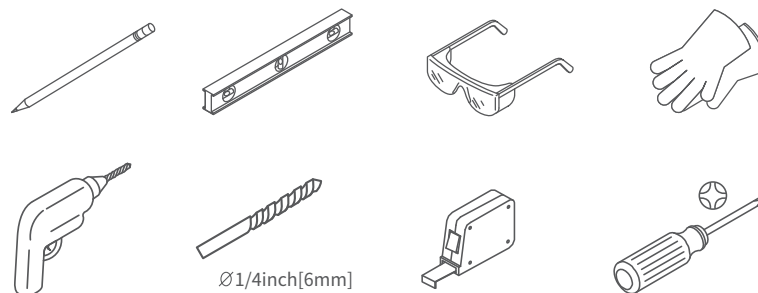


ACCESSORIS LIST



Wall Anchors



HangZ-Bar boardd




Screws ST4.2x40

Step 1


Place the Z-Bar on the wall at the desired location, Use a level to ensure it's even and then mark the holes with a pencil.

Note: It is recommended to install the LED mirror at a height of 48inch[1.2 m] above the ground

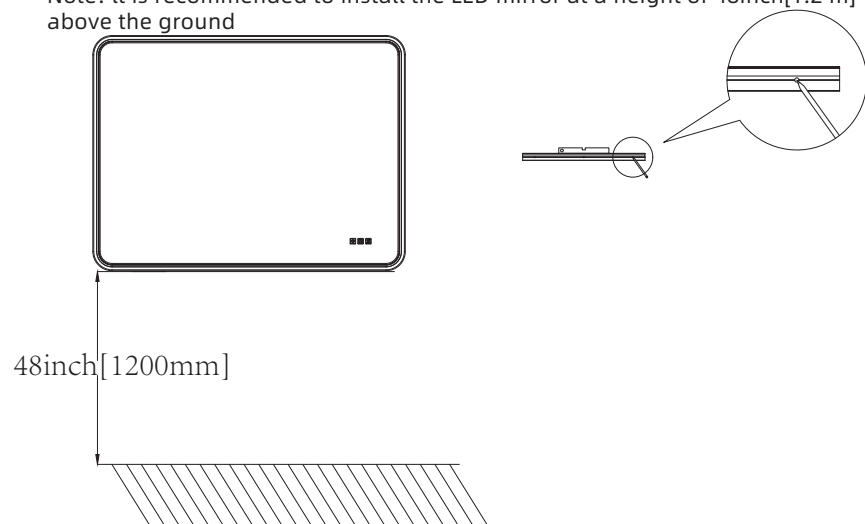


Step 2

Use a 1/4inch[6mm] drill bit to drill holes at the marked positions to a depth of approximately 1.7inch[45mm]

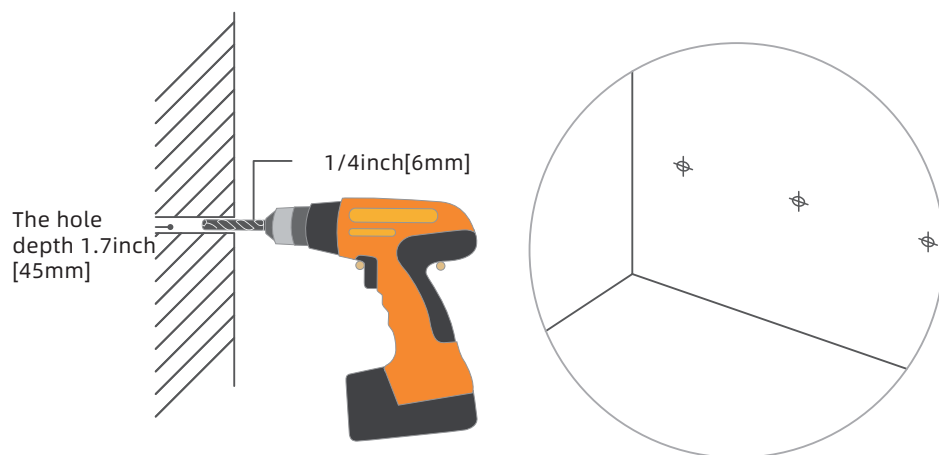

Step 3


Hammer the anchors into the holes

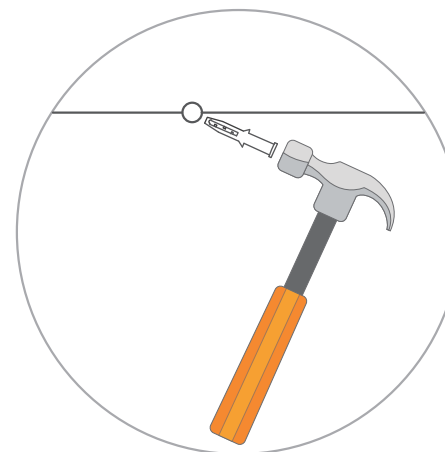

Step 4

Secure the Z-Bar to the wall using screws.


Note: Please ensure that the Z-Bar is securely installed.

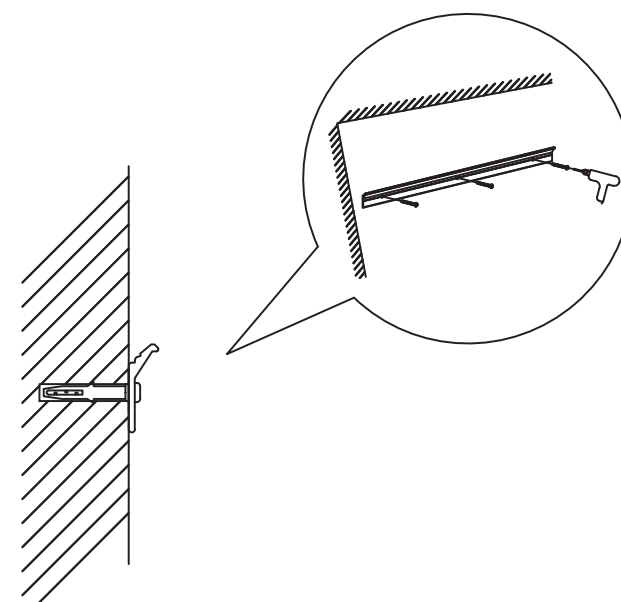

Step 5



WARNING

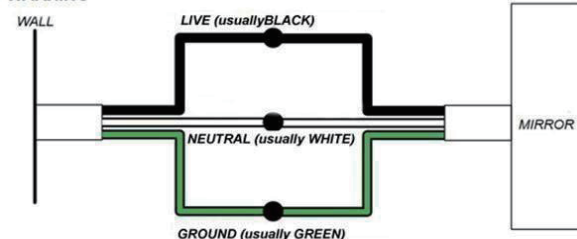

Connect the mirror with the main supply.


- We provide plug with mirrors.

ATTENTION:
PLEASE CUT OFF THE MAIN POWER
SUPPLY BEFORE WIRING!

Step 6

Hang the mirror on the Z-Bar.

Note: Two people are needed for the installati on

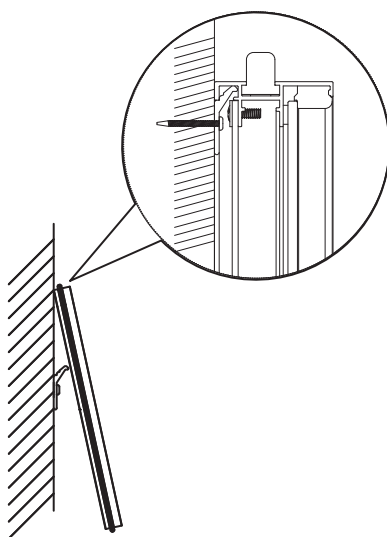


Step 6

After installation is complete, gently shake the mirror to ensure it is securely installed. While shaking the mirror, it is essential to support it to prevent it from falling



Operating Manual

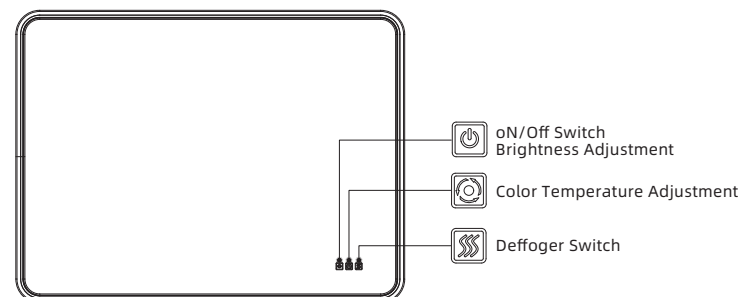

The buttons turn blue when connected to the main power supply and turn white after a brief touch. Optional to be wired to wall switch by ON/OFF memory function.



Smart Switch

Briefly touch the button to control on/off the light and illumination modes.

The first touch is to turn on all the lights, the second touch is to turn on only the inner light, the third touch is to turn on only the outer light, and the touch again turn off all the lights, and so on.

Press and hold the button to adjust the brightness when the mirror is on.

If there is no operation within 15 seconds, touching this button will directly turn off the lights.



Color temperature adjustment switch

Briefly touch the button to change the color temperature among the 3000K, 4200K and 6000K when the light is on.

Press and hold the button to change the color temperature steplessly . turn off the lights.



Defogging Switch

The mirror begins to warm up and defog after you press the defogger button.

Press the button again to turn off the anti-fog function.

Press and hold the button to turn the blue backlight on or off.

Note: To prevent damage from prolonged high temperatures, the defogger will automatically stop after 60 minutes of continuous operation.