


## Installation and Wiring Instructions:

NOTE: ALWAYS TURN POWER OFF BEFORE INSTALLING LIGHTING FIXTURE

IMPORTANT: YOU SHOULD USE A QUALIFIED ELECTRICIAN TO INSTALL THIS FIXTURE

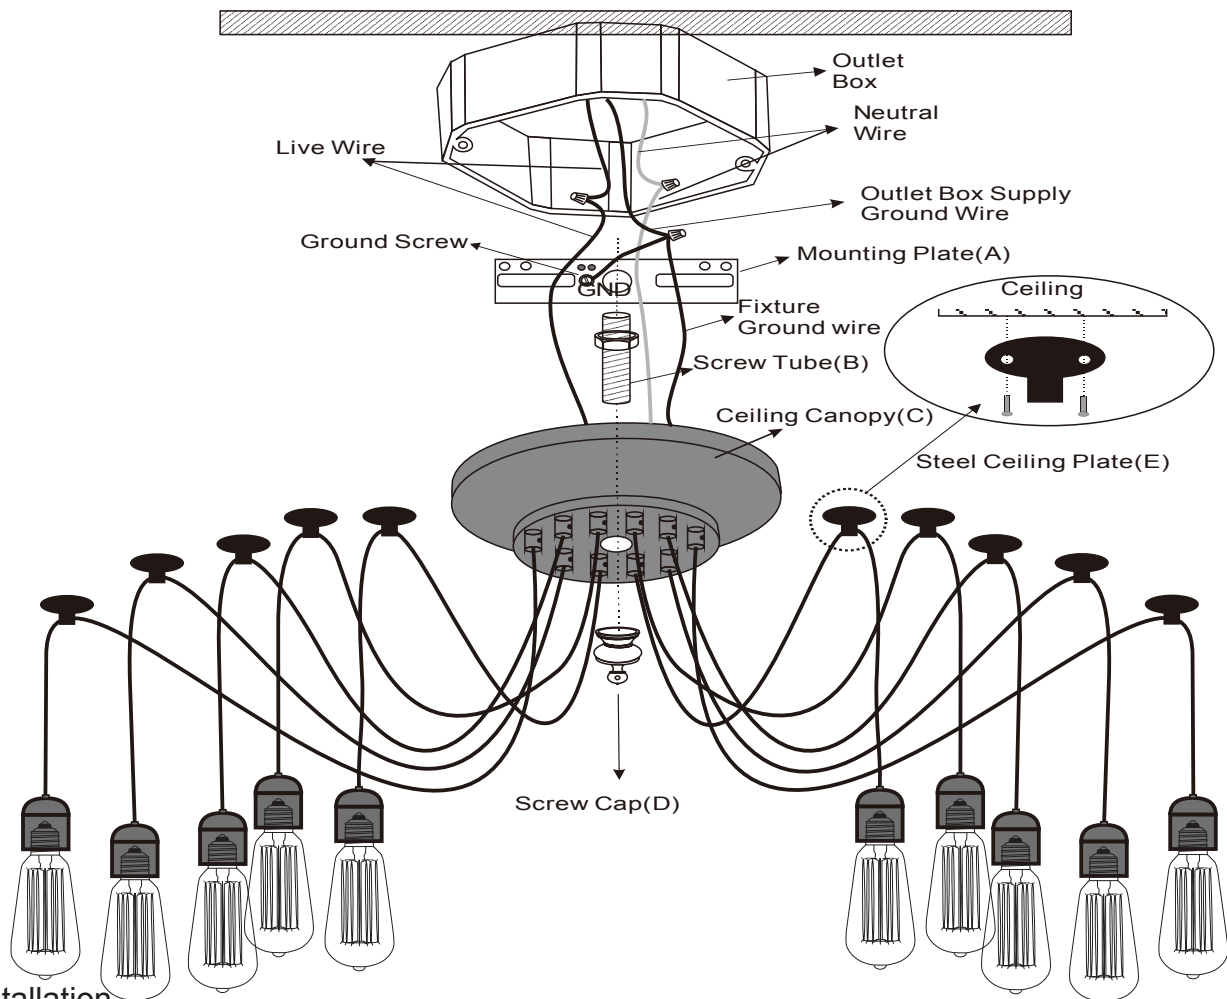

### Installation

1. Install the Mounting Plate(A) to outlet box using box screws provided with outlet box.

### 2. Wiring:

1). Split the conductors of the fixture wire about 4 inches. Being careful not to expose any of the wire inside of the insulation.

2). Connect the fixture ground wire to the outlet box ground wire using wirenut. Connect outlet box ground wire to mounting plate with GREENhex-head ground screw to appendix hole in mounting plate marked "GND".

3). Connect the half of the fixture wire that is white marked (Neutral Wire) to the outlet box supply wire (White). Connect the other half of the fixture wire that is black marked (Live Wire) to the outlet box supply wire (Black or Red). Use wirenuts provided.

3. Fix the Ceiling Canopy(C) to the Mounting Plate(A) with Screw Tube(B) and Screw Cap(D).

4. Install the 10pcs Steel Ceiling Plate(E) onto the ceiling with screw provided.

Recommendation: Maximum 60 WATT Type ST64 or ST58 Edison bulb (10pcs bulbs included. Pls take care when assembling as it's fragile).

### Cleaning of your lamp:

Turn power off. Wipe with a damp cloth. Do not use abrasives.

**\*SAVE THIS INSTRUCTION FOR FUTURE REFERENCE.**

**MADE IN CHINA**