


ASSEMBLY INSTRUCTIONS

1. Screw the connecting rod (B) into the lampshade (A) and screw the canopy (C) into the connecting rod (B).
2. Screw the metal rods (D) into the threaded tube inside the lampshade (A).
3. Attach the diffuser (E) to the top of fabric shade (F) and secure the fabric shade with the nuts (G).
4. Put the diffuser (H) into the fabric shade (F) at an angle.
5. Loosen the hex nuts around the bolts (K) and screw in or unscrew the bolts from the junction box to get the right length for installation.
6. Install the mounting plate (J) on the outlet box by using the screws (L).
7. Connect the fixture wire to the **circuit wire** by wire nuts (M), black wire with live wire, white wire with **neutral** wire, ground wire with ground wire.
8. Fix the lamp body (C) to the mounting plate (J) by the ball nuts (N).


Please consult a qualified Electrician if you are not familiar with electrical wiring.



3000K 4500K 5500K


The LED color temperature can be adjusted before installing the lamp.

100% 60% 10%



Dimmer

(NOT included in the package)

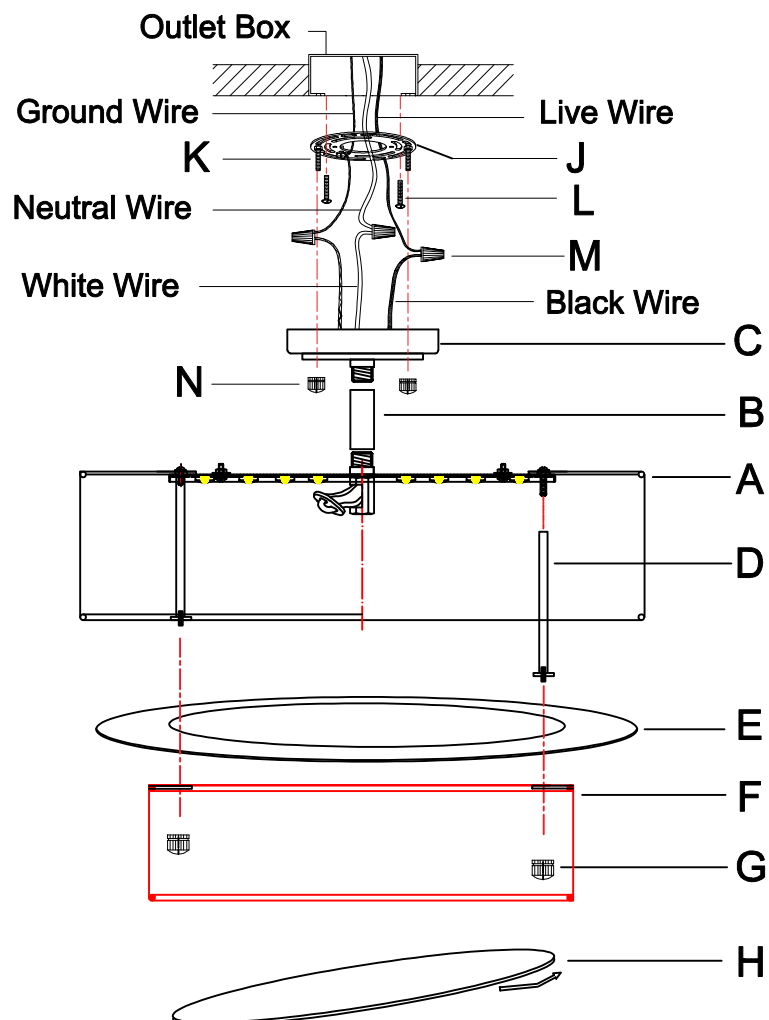

1. The ceiling light is fully dimmable with a compatible dimmer and its dimming range is from 100% down to 10%.

2. The dimming effect varies with the brands of dimmers