

# LED Bathroom Mirror User Manual

## IMPORTANT SAFETY INSTRUCTIONS

- 1) Please carefully read these instructions before installation and retain for your future reference.
- 2) It is the company's policy to recommend the use of a qualified electrician for the installation of these fittings.

### **DANGER: To reduce the risk of electrical shock**

- 1) For safety reasons always ensure that the mains supply switch is isolated before attempting installation;

### **WARNING: To reduce the risk of burns, fire, electrical shock or injury to persons:**

- 1) We recommend that the surface fuse is withdrawn to prevent accidental switching on while work is in progress;
- 2) Close supervision is necessary when the mirror light is used by or near children, invalids or disabled.
- 3) Use mirror light only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.
- 4) Never operate the mirror light if it has a damaged wire. If it is not working properly. If it has been dropped or damaged or dropped into water. Return the furnishing to a service center for examination or repair.
- 5) Keep the wire away from heated surfaces.
- 6) Never drop or insert any object into any opening.
- 7) This product contains glass parts. Care must be taken when fitting or handling these parts to prevent personal injury or damage to the products.
- 8) Ensure the mounting surface is dry and strong enough to allow for the safe fitting of this fixture.
- 9) Ensure that current building regulations are adhered to at all times should an additional electrical supply be required.
- 10) Care must be taken before drilling fixing holes to avoid any existing wiring or paperwork that may be concealed;
- 11) Finish the installation as following steps:
- 12) Do not use outdoors
- 13) Mounting distance from ground do not exceed 1.5m


### **WARNING:**

- 1) **Risk of Electric Shock-Connect this furnishing to a properly grounded outlet only.**
- 2) **Grounding Instructions:** This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product."


Specification

Size	Thickness	Touch Button	LED Stripe Model	Color Temperature	Lumen	CRI	Power(W)	Input Voltage (V)	Weight (kg)
20"X28"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	4520	90	48	110V	6.9
24"X32"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	5480	90	60	110V	8.8
24"X36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	5960	90	60	110V	9.68
24"X40"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	6125	90	60	110V	10.5
28"X36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	6251	90	60	110V	11
36"X36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	8144	90	75	110V	13.5
32"X40"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	8144	90	75	110V	13.3
32"X48"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	9074	90	100	110V	15.4
36"X48"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	9660	90	100	110V	17.2
28"X60"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	9500	90	100	110V	16.8
32"X72"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	12210	90	150	110V	22.5
55"X 30"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	9500	90	150	110V	19
60"X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	10500	90	155	110V	17.5
72"X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	12000	90	150	110V	12.5
84"X 32"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	14920	90	150	110V	28
96"X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/ 6000	18620	90	150	110V	32

# Installation

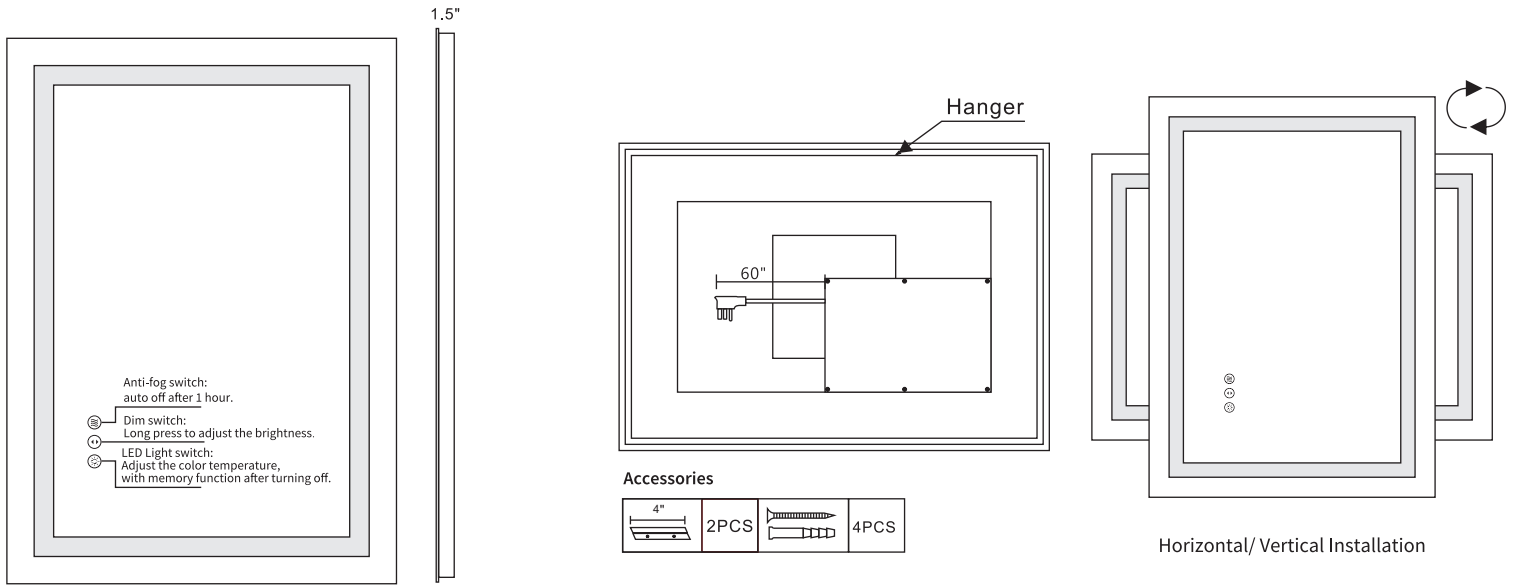

Power Method 1: Plug in		Power Method 2 : Hardwire	
Turn off the power before installation.			
Step 1	Step 2	Step 3	Step 4
Measure the distance between the two ends, this mirror can be hung horizontal or vertical. Using a pencil and a level, mark the desired position on the wall.	Drill the holes for nails and screws.	Insert the nails.	Mounted the brackets on the wall and then tight the screws to ensure the bracket stay sturdy. (Leave a 2-3 mm gap between the screwhead and wall)
Step 5	Step 6		
Connect the wires properly to their corresponding color. Lift the mirror above the brackets.	Turn on the power.		



White(neutral) supply wire to the white(or ribbed) mirror wire  
Black (live) supply wire to the black(or smooth) mirror wire  
Green or bare copper supply wire to the green or bare copper mirror wire.

## Maintenance

1. Do not touch the mirror with wet hands, and do not wipe the mirror with wet cloth to avoid increasing moisture intrusion.
2. It is recommended to wipe the mirror with a soft cloth or gauze.
3. Do not use any chemicals or misuse cleaning agents.